
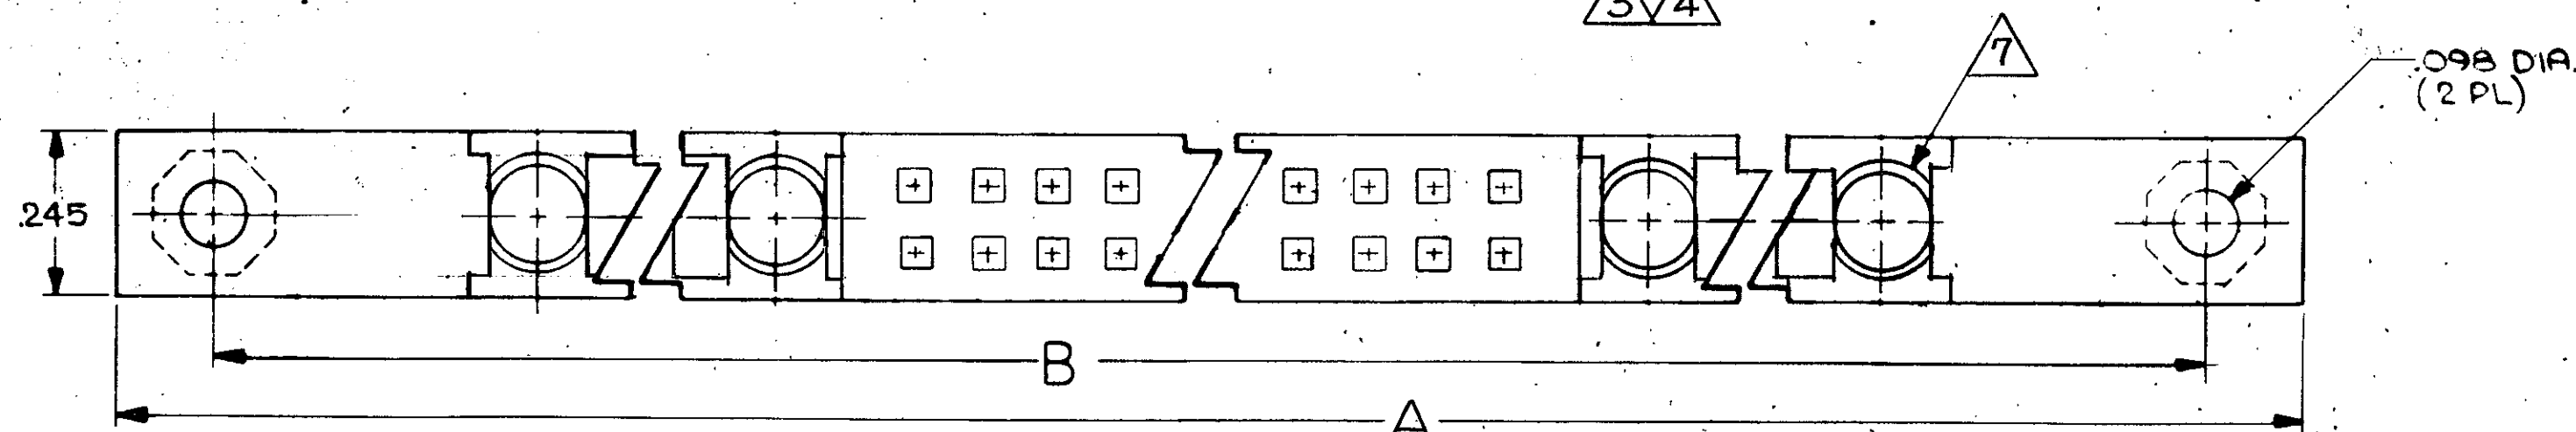
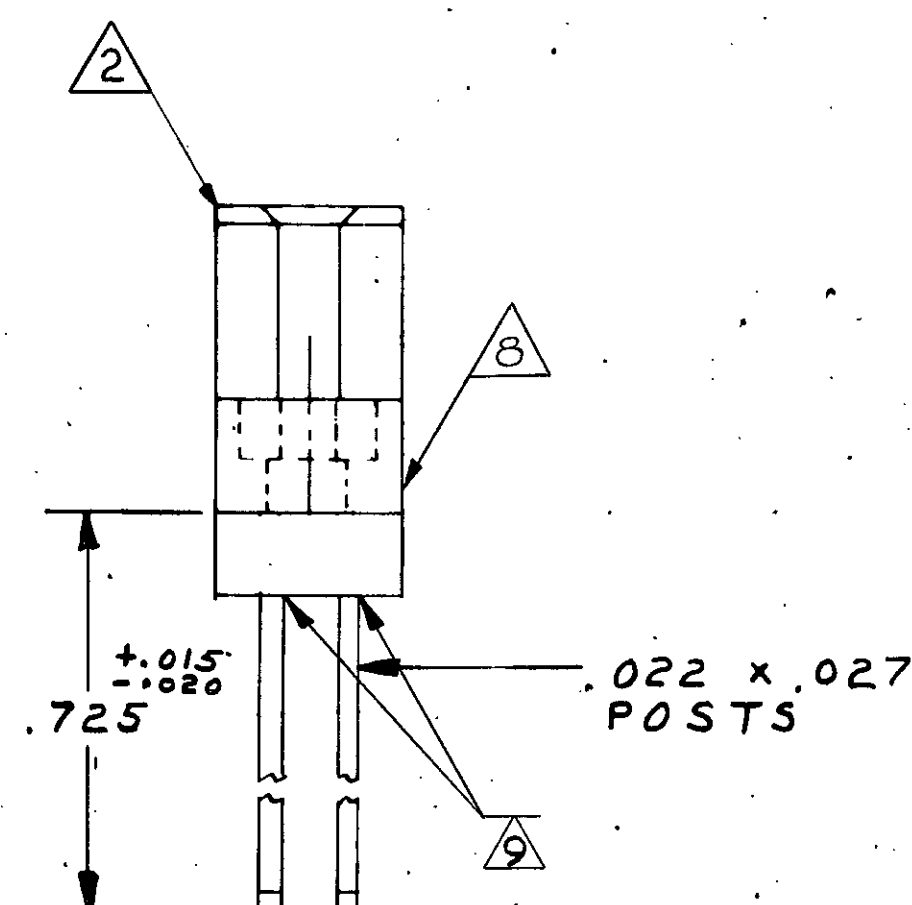


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION

		REVISIONS				
P	F	ZONE	LTR	DESCRIPTION	DATE	APPROVE
✓	✓		O	RELEASED WAS 5085-1068	5-84	
			OI	REV. PER ECN AB-0716 TH	2-85	
✓	✓			REV. PER ECN AB-0759 db	3-7-85	
✓	✓		A	REV. PER DF-0457 & DF-0459 CT	5-16-88	56 gpb
✓	✓		B	REV PER 0600-4159-95 TA	4-19-86	DM
			C	REV PER 0600-5631-96 TT	8-98	DM
			D	REV PER 0600-6466-97 TT	10-98	DM

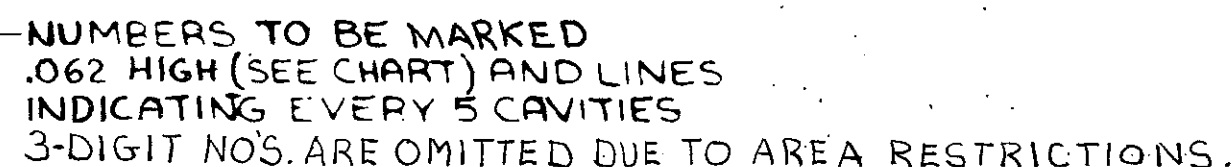

8. STABILIZER - MATL. GLASS FILLED POLYESTER
COLOR ; BLACK.
9. EPOXY ADDED TO AREA WHERE THE CONTACT POSTS EMERGE FROM
THE STABILIZER TO INSURE POST TRUE POSITION.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES										CONTRACT NO.										AMP INCORPORATED Harrisburg, Pa.									
TOLERANCES ON: DECIMALS: .010 ANGLES: $\pm .010$										DR 6/4/84 <i>W. J. [Signature]</i>										NAME RECPT ASSY, 1000 SERIES BOX WITH 8 COAX CAVITIES, EXTERNAL KEYING, AND WIRE WRAP CONTACTS.									
MATERIAL 										CHK 6/11/84 <i>W. J. Reagon</i>																			
										APRD 6/4/84 <i>W. J. Reagon</i>																			
										ARRD 6/10/84 <i>W. J. [Signature]</i>																			
FINISH 										DSGN APPD										SIZE CODE IDENT NO DRAWING NO C 00779 533170									
										OTHER APPD										SCALE 4:1 SHEET 1 OF 2									

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

REVISIONS					DATE	APPROVED
P	F	ZONE	LTR	DESCRIPTION		
				D [SEE SHEET 1]		

	1.8	7.14	.600	3	.600	6	2.665	3.065	3.355	8	14	1-533170-0
OBS	1.13	12.24	.600	3	1.100	11	3.165	3.565	3.855	↑	24	↑ -9
	1.18	17.34	.600	3	1.600	16	3.665	4.065	4.355		34	-8
OBS	1.23	22.44	.600	3	2.100	21	4.165	4.565	4.855		44	-7
OBS	1.28	27.54	.600	3	2.600	26	4.665	5.065	5.355		54	-6
	1.33	32.64	.600	3	3.100	31	5.165	5.565	5.855		64	-5
OBS	1.38	37.74	.600	3	3.600	36	5.665	6.065	6.355		74	-4
OBS	1.43	42.84	.600	3	4.100	41	6.165	6.565	6.855		84	-3
OBS	1.48	47.94	.600	3	4.600	46	6.665	7.065	7.355	↓	94	↓ -2
OBS	1.53	52.104	.600	3	5.100	51	7.165	7.565	7.855	8	104	533170-1
CAVITY IDENT.	G	F	E	D	C	B	A	COAX POS.	NO. OF POS.	PART NO		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES ON:
DECIMALS $\pm .010$
ANGLES $\pm$

MATERIAL

FINISH

CONTRACT NO

DR

CHK

APPD

APPD

DSGN APPD

OTHER APPD

AMP

AMP INCORPORATED
Harrisburg, Pa. 17105

NAME RCPT. ASSY, 1000 SERIES BOX,
WITH 8 COAX CAVITIES, EXTERNAL
KEYING, & WIRE WRAP CONTACTS

SIZE

FSCM NO

DRAWING NO

C

00779

533170

SCALE

SHEET 2 of 2

CUSTOMER DRAWING

-
- Home
- Part Number Search
- Text Search
- Alternate Part Search
- Multiple Part Comparison
- Alphabetical Search
- Brand Search
- Industry Product Search
- Product Type Search
- Product Family Search
- Competitor Cross Reference
- Document Number Search
- Lead Free Solutions
- Help/Glossary

Current Brand View

AMP

View All Tyco Electronics Brands

Click to activate links to all other products

Two-Piece, High Density PCB Connectors

.050, .075, .100 Box Contact Connectors

AMP

1-533170-0 -- 1 of 1 products

Active

Active

(Tyco Electronics P/N: 1-533170-0)

	Sales Information	AMP ACES	Step Search Screen
		Related Documents	General Information
		Pricing	Product Availability

Please use the customer drawing for all design activity.

- Customer Drawing: 533170, Rev. D
- Document Title: RECPT ASSY, 1000 SERIES BOX WITH 8 COAX CAVITIES, EXTERNAL KEYING, AND WIRE WRAP CONTACTS
- 191580.pdf

191580.pdf (143K)

Searchable Features:	
Brand:	AMP
Product Type:	Receptacle Assembly
Centerline Spacing (mm [in]):	2.54 [.100]
No. of Rows:	2
No. of Positions:	14
Grade:	Commercial

Other Properties:	
Contact Material:	Beryllium Copper
Contact Termination Area Plating:	Gold (30)
Color:	Blue
Housing Material:	Diallyl Phthalate

Post Styles:	Wrap-Type
Post Size (mm [in]):	0.64 [.025] Sq.
Termination Post Length (mm [in]):	18.42 [.725]
Staggered:	No
Sealed:	No
Application:	PC Solder Mount
Strain Relief:	Without
No. of Terminations per Post:	3 High
Mount Angle:	Vertical
PCB Mount Style:	Thru Hole
Gasket:	Without
Contact Mating Area Plating:	Gold (50)
Pin Protection:	Without
In-Line/Staggered Tails:	Staggered
Hybrid:	Yes
No. of Hybrid Cavities:	8
Jackscrews:	Without
Stabilizers:	With

Post Stabilizer Material:	Glass-filled Polyester
Comment:	Accepts coaxial contacts - Vertical Cable Socket P/N 227605-1, and Right-Angle Cable Socket P/N 227606-1 and Vertical PC Board Mount Socket P/N 227603-1.

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Brands](#) | [Industries](#) | [Customer Service](#) | [About](#) | [Home](#)