

PGA / BGA / PLCC - PLCC SOLDER TAIL



Series **PGA / BGA / PLCC - PLCC solder tail**
 540 PLCC
 Socket for Plastic Leaded Chip Carrier (PLCC),
 Solder tail

PLCC sockets, solder tail, with precision stamped contacts providing component retention thanks to positive spring action.

Technical specs.:

Insulator: Glass filled thermoplastic
 PPS-GF40-FR
 Flammability: UL 94V-O
 Contact: Phosphor bronze
 Mechanical life: Min. 25 cycles
 Rated current: 1 A
 Contact resistance: Max. 30 mΩ
 Dielectric strength: Min. 500 V RMS
 Insulation resistance: Min. 1000 MΩ
 Capacitance: Max. 1 pF

Dimensions

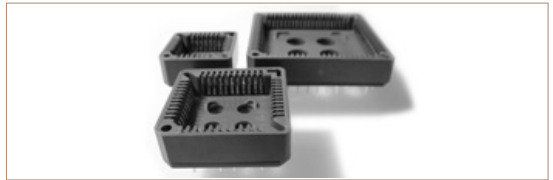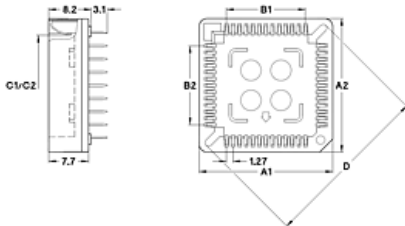

Ordering information RoHS-compliant parts

PP Plating code Sleeve Clip
88 Tin Tin

General technical specs. ...

No of poles	A1/A2	B1/B2	C1/C2	D	E	Order Codes
28	18.09	7.62	11.2	22.12		540-88-028-24-008
32	18.04/20.06	7.62/10.16	11.2/13.6	23.12		540-88-032-24-008
44	23.1	12.7	16.2	29.12		540-88-044-24-008
52	25.7	15.24	18.8	32.85		540-88-052-24-008
68	30.8	20.32	23.7	39.9		540-88-068-24-008
84	35.95	25.4	28.9	47.4		540-88-084-24-008