
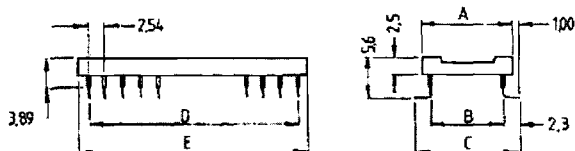


IC-SMT-sockets

IC-SMT-sockets with gold plated precision spring contacts



Part no.	No. of contacts	Dimensions mm / inch				
		A	B	C	D	E
AR 06-SMD	6	10,16 0.400	7,62 0.300	12,16 0.476	5,08 0.200	7,62 0.300
AR 08-SMD	8	10,16 0.400	7,62 0.300	12,16 0.476	7,62 0.300	10,16 0.400
AR 14-SMD	14	10,16 0.400	7,62 0.300	12,16 0.476	15,24 0.600	17,78 0.700
AR 16-SMD	16	10,16 0.400	7,62 0.300	12,16 0.476	17,78 0.700	20,32 0.800
AR 18-SMD	18	10,16 0.400	7,62 0.300	12,16 0.476	20,32 0.800	22,86 0.900
AR 20-SMD	20	10,16 0.400	7,62 0.300	12,16 0.476	22,86 0.900	25,40 1.000
AR 24-SMD	24	17,78 0.700	15,24 0.600	19,78 0.778	27,94 1.100	30,48 1.200
AR 24/7-SMD	24	10,16 0.400	7,62 0.300	12,16 0.476	27,94 1.100	30,48 1.200
AR 28-SMD	28	17,78 0.700	15,24 0.600	19,78 0.778	33,02 1.300	35,56 1.400
AR 28/7-SMD	28	10,16 0.400	7,62 0.300	12,16 0.476	33,02 1.300	35,56 1.400
AR 40-SMD	40	17,78 0.700	15,24 0.600	19,78 0.778	48,26 1.900	50,80 2.000



Contacts

Contact spring copper alloy, slit 4 times
Surface gold over nickel
Absolute protection against capillary action
Connecting pins brass, solder version, tinned

Isulators

Ektar FB, CG 907 Polymer UL 94 VO
Insulation resistance $10^{12} \Omega$
Operating temperature range
-65°C to +150°C
Resistant to detergent

IC-SMT sockets low cost

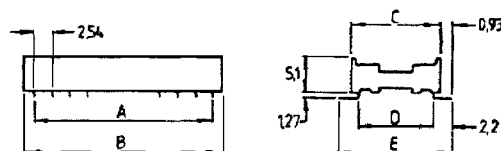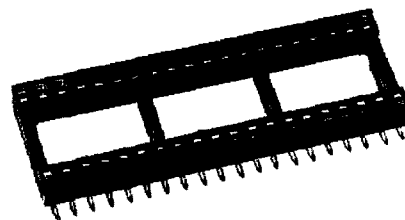

Part no.	No. of contacts	Dimensions mm / inch				
		A	B	C	D	E
A 06-SMD	6	5,08 0.200	7,62 0.300	10,16 0.400	7,62 0.300	12,02 0.473
A 08-SMD	8	7,62 0.300	10,16 0.400	10,16 0.400	7,62 0.300	12,02 0.473
A 14-SMD	14	15,24 0.600	17,78 0.700	10,16 0.400	7,62 0.300	12,02 0.473
A 16-SMD	16	17,78 0.700	20,32 0.800	10,16 0.400	7,62 0.300	12,02 0.473
A 18-SMD	18	20,32 0.800	22,86 0.900	10,16 0.400	7,62 0.300	12,02 0.473
A 20-SMD	20	22,86 0.900	25,40 1.000	10,16 0.400	7,62 0.300	12,02 0.473
A 24-SMD	24	27,94 1.100	30,48 1.200	17,78 0.700	15,24 0.600	19,64 0.773
A 28-SMD	28	33,02 1.300	35,56 1.400	17,78 0.700	15,24 0.600	19,64 0.773
A 40-SMD	40	48,26 1.900	50,80 2.000	17,78 0.700	15,24 0.600	19,64 0.773

Contacts

Phosphor bronze
Protection against capillary action
Surface: tin

Isulators

Ektar FB, CG 907 Polymer UL 94 VO
Insulation resistance $10^{12} \Omega$
Operating temperature range
-65°C to +150°C