

SPECIFICATIONS

D-SUB Connector

Mechanical


Contact Mating Force: 3.06kg (6.75Lb) max.
Contact Unmating Force: 0.19kg (0.42 Lb) min.
Durability: 500 Cycles

Electrical


Current Rating: 5A
Contact Resistance: 35mW (Upper); 25 mW (Lower)
Dielectric Withstanding Voltage: 1000V AC/1min min.
Insulation Resistance: 5000MW min.

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55 to +105

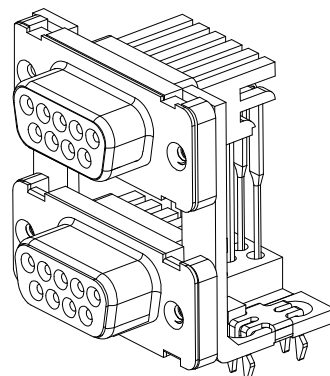

DRAWING

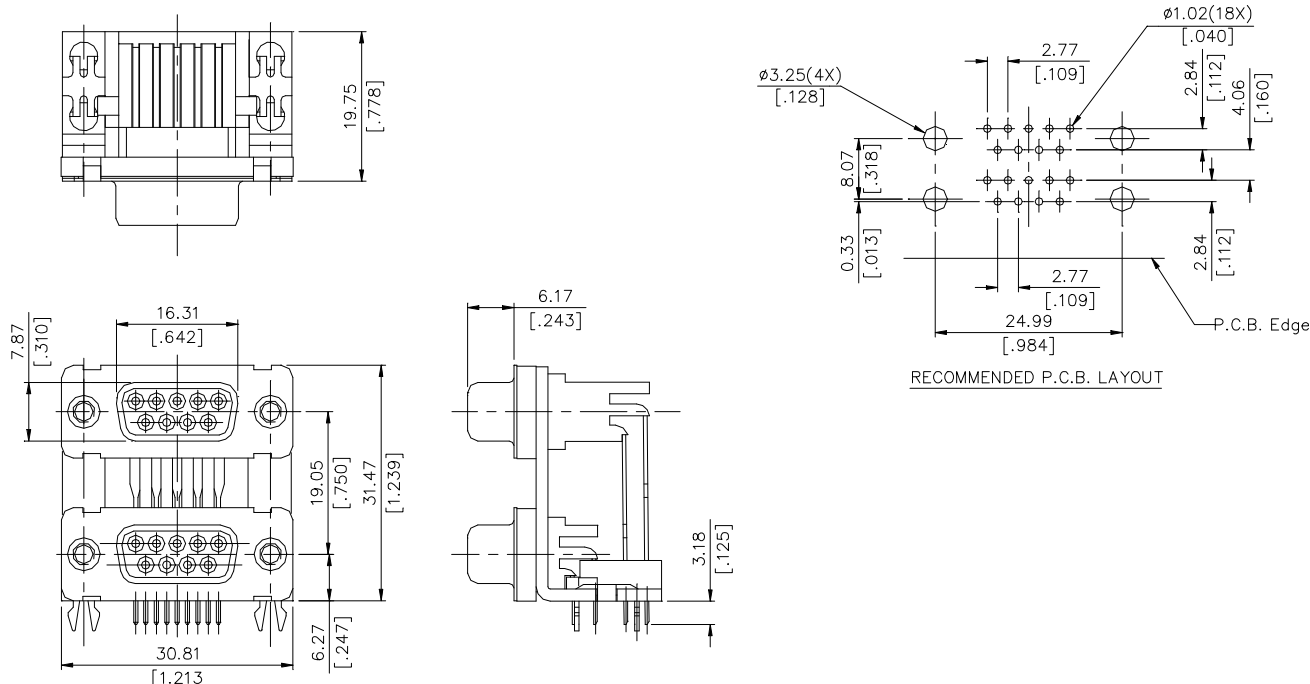

ORDERING INFORMATION

PRODUCT NO.: DM 1 1 1 5 * - 76 - 4F

D-SUB Series
Termination Type
1=Right Angle
Contact Design Type
1=Female
No. of Pos.
1=9 Pos.
Body Length
5=14.99

Lead Free
Extension Code
Contact Area Plating
1=Gold Flash
3=30u" Gold