



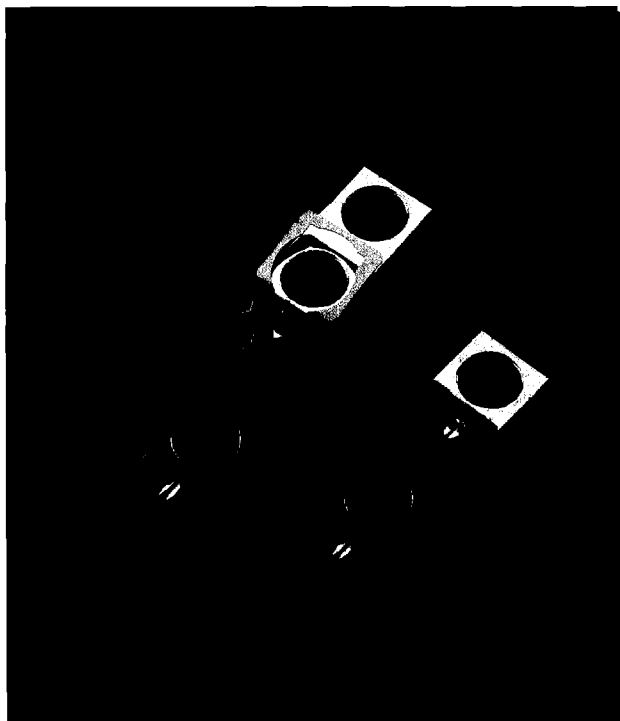

Features

- ◆ Available in 3 through 9 circuits
- ◆ High density
- ◆ With retaining clip ground strap
- ◆ Options with or without metal shell
- ◆ Mates with Leoco MDPD series

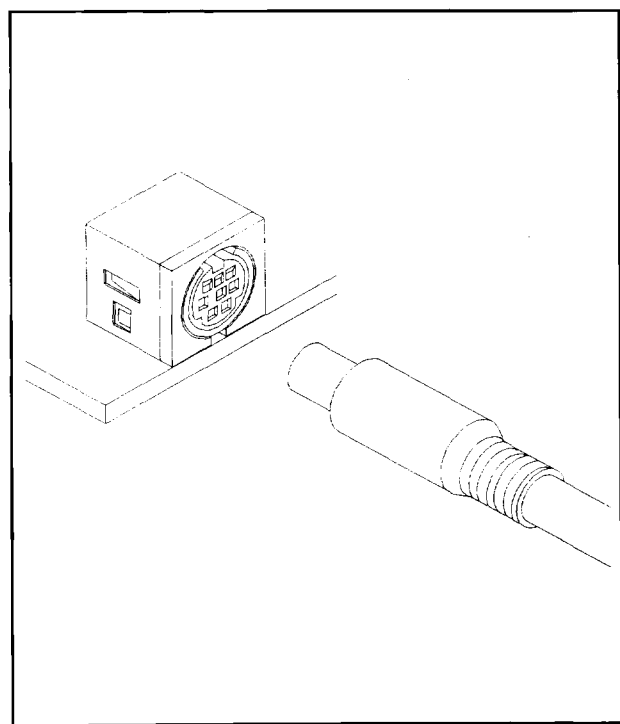

Specifications

- ◆ Current rating: 1A DC,AC
- ◆ Voltage rating: 50V DC,AC
- ◆ Temperature rating: -25°C ~ +105°C
- ◆ Contact resistance: 20m Ω max.
- ◆ Insulation resistance: 50M Ω min.
- ◆ Withstanding voltage: 500V AC /minute
- ◆ Applicable PC board thickness: 1.6mm(.063")

Standards

 Recognized No. E82349

MDSL Series Side Entry PCB Mount Mini Din Socket




MDSL-0*SC0A

MDSL-0**00A

Unit : $\frac{\text{mm}}{\text{inch}}$

For 3~8 contacts

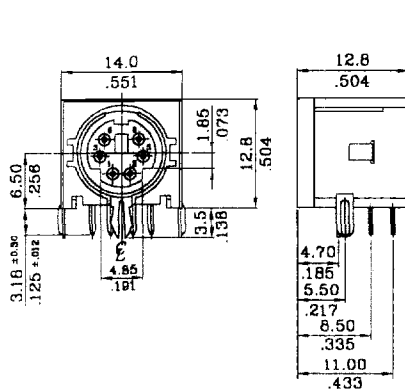

Ordering Information:


MDSL - 0 * 00A
1 2 3 4

1. Series No.
2. No. of circuit
3. Plating :

S=Contact area: Selective gold flash over 30~50 μ " nickel overall
Soldering area: Tin plated 120 μ " min. over 30~50 μ " nickel overall
Earth terminal area: Tin plated 120 μ " min. over 30~50 μ " nickel overall
U=Contact area: Gold flash over 30~50 μ " nickel overall
Soldering area: Gold flash over 30~50 μ " nickel overall
Earth terminal area: Gold flash over 30~50 μ " nickel overall

4. Special options:

For 9 contacts

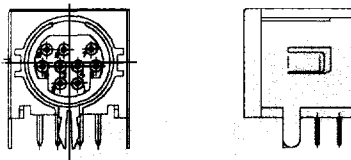

MDSL Series Mini Din Socket With Fully Shielded



Unit : $\frac{\text{mm}}{\text{inch}}$

Ordering Information:

MDSL - 0 * S EOA
1 2 3 4

1. Series No.
2. No. of circuit
3. Plating :

S = Tin plated 120 μ " min. over 30~50 μ " nickel overall

4. Special options:

