


Toroidal Power Transformers

Toroidal Power Transformers Up to 1.0 KVA


Standard transformers suitable for use in applications where low magnetic noise and superior electrical performance in a small package is required. Designed and built to meet the basic requirements of UL, CSA, VDE and IEC, these transformers are 100% dielectric tested at 4000V rms and utilize a Class B, 130C recognized insulation system. Available with either 115V, 50-500Hz or 115/230V,

50-500Hz primaries and up to 1KVA output, these transformers may be specified for use in many applications.

Optional mounting hardware includes two Neoprene pads and a metal washer. Standard leads are 8" long self-leads. Other ratings available upon request.



VA	O.D.	HT.	LBS
20	2.88	1.25	1.10
40	3.25	1.38	1.54
70	3.75	1.44	2.20
100	3.75	1.57	2.86
150	4.50	1.57	3.30
340	4.50	2.32	5.28
600	5.50	2.75	9.68
1000	6.38	2.88	14.5

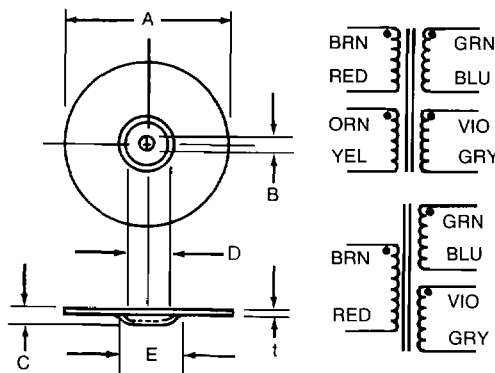


ZINC PLATED STEEL CENTERING WASHER

PART NO.	A	B	C	D	E	t	WT/OZ
200109A0001	2.0	0.17	0.18	0.30	0.44	.04	0.5
200109A0002	2.4	0.20	0.22	0.40	0.75	.05	1.0
200109A0003	2.8	0.25	0.26	0.62	1.08	.05	1.3
200109A0004	3.5	0.25	0.28	0.85	1.29	.06	2.6
200109A0005	4.4	0.32	0.33	1.08	1.64	.08	5.5
200109A0006	5.7	0.32	0.37	1.08	1.64	.08	9.1

NEOPRENE WASHER

PART NO.	A	B
200110A0001	2.0	0.17
200110A0002	2.4	0.20
200110A0003	2.8	0.25
200110A0004	3.5	0.25
200110A0005	4.4	0.32
200110A0006	5.7	0.32

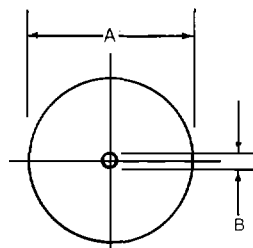

PART NO.		SECONDARY RMS RATING	
SINGLE 115V PRIMARY	DUAL 115/230V PRIMARY	VOLTGE Vrms	CURRENT Arms
T20-10B1	DT20-10B1	2x5	2.00
T40-10B2	DT40-10B2	2x5	4.00
T70-10B3	DT70-10B3	2x5	7.00
T100-10B4	DT100-10B4	2x5	10.0
T150-10B5	DT150-10B5	2x5	15.0
T340-10B6	DT340-10B6	2x5	34.0
T20-12B7	DT20-12B7	2x6.3	1.58
T40-12B8	DT40-12B8	2x6.3	3.17
T70-12B9	DT70-12B9	2x6.3	5.55
T100-12B10	DT100-12B10	2x6.3	7.93
T150-12B11	DT150-12B11	2x6.3	11.9
T340-12B12	DT340-12B12	2x6.3	27.0
T20-16B13	DT20-16B13	2x8	1.25
T40-16B14	DT40-16B14	2x8	2.50
T70-16B15	DT70-16B15	2x8	4.37
T100-16B16	DT100-16B16	2x8	6.25
T150-16B17	DT150-16B17	2x8	9.37
T340-16B18	DT340-16B18	2x8	21.2
T600-16B19	DT600-16B19	2x8	37.5
T20-18B20	DT20-18B20	2x9	1.11
T40-18B21	DT40-18B21	2x9	2.22
T70-18B22	DT70-18B22	2x9	3.88
T100-18B23	DT100-18B23	2x9	5.55
T150-18B24	DT150-18B24	2x9	8.33
T340-18B25	DT340-18B25	2x9	18.8
T600-18B26	DT600-18B26	2x9	33.3
T20-20B27	DT20-20B27	2x10	1.00
T40-20B28	DT40-20B28	2x10	2.00
T70-20B29	DT70-20B29	2x10	3.50
T100-20B30	DT100-20B30	2x10	5.00
T150-20B31	DT150-20B31	2x10	7.50
T340-20B32	DT340-20B32	2x10	17.0
T600-20B33	DT600-20B33	2x10	30.0
T20-24B34	DT20-24B34	2x12	0.83
T40-24B35	DT40-24B35	2x12	1.66
T70-24B36	DT70-24B36	2x12	2.91
T100-24B37	DT100-24B37	2x12	4.16
T150-24B38	DT150-24B38	2x12	6.25
T340-24B39	DT340-24B39	2x12	14.1
T600-24B40	DT600-24B40	2x12	25.0
T20-28B41	DT20-28B41	2x14	0.71
T40-28B42	DT40-28B42	2x14	1.42
T70-28B43	DT70-28B43	2x14	2.50
T100-28B44	DT100-28B44	2x14	3.57
T150-28B45	DT150-28B45	2x14	5.35
T340-28B46	DT340-28B46	2x14	12.1
T600-28B47	DT600-28B47	2x14	21.4
T1000-28B48	DT1000-28B48	2x14	35.7
T20-36B49	DT20-36B49	2x18	0.55
T40-36B50	DT40-36B50	2x18	1.11
T70-36B51	DT70-36B51	2x18	1.94
T100-36B52	DT100-36B52	2x18	2.77
T150-36B53	DT150-36B53	2x18	4.16
T340-36B54	DT340-36B54	2x18	9.44
T600-36B55	DT600-36B55	2x18	16.6
T1000-36B56	DT1000-36B56	2x18	27.7

EWC, Inc. reserves the right to make changes without notice in design and specifications in order to effect product improvement.



385 HIGHWAY 33, ENGLISHTOWN, NJ 07726
908/446-3110 FAX 908/446-5362