


(METRIC)

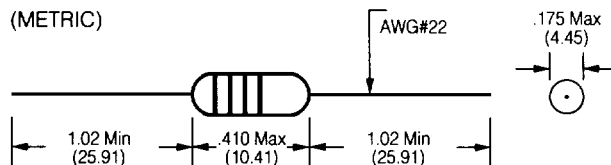

1201 RF COATED CHOKES

Part No.	Inductance uh	Q Min	Test Freq (MHz)	SRF Min (MHz)	DCR Max (Ohms)	Rated Current (mA)
1201-01M	.15	50	25.0	525	.03	2740
1201-02M	.22	50	25.0	450	.055	2020
1201-03M	.33	45	25.0	360	.09	1580
1201-04M	.47	45	25.0	310	.12	1370
1201-05K	.56	50	25.0	280	.135	1290
1201-06K	.68	50	25.0	250	.15	1220
1201-07K	.82	50	25.0	220	.22	1020
1201-08K	1.00	50	25.0	200	.29	880
1201-09K	1.20	33	7.9	180	.42	730
1201-10K	1.50	33	7.9	160	.50	670
1201-11K	1.80	33	7.9	150	.65	590
1201-12K	2.20	33	7.9	135	.95	485
1201-13K	2.70	33	7.9	120	1.20	430
1201-14K	3.30	33	7.9	110	2.00	335
1201-15K	3.90	33	7.9	100	2.30	310
1201-16K	4.70	33	7.9	80	.40	294
1201-17K	5.60	45	7.9	60	.32	565
1201-18K	6.80	50	7.9	55	.50	450
1201-19K	8.20	50	7.9	50	.60	410
1201-20K	10.0	55	7.9	45	.90	335
1201-21K	12.0	65	2.5	42	1.10	305
1201-22K	15.0	65	2.5	40	1.40	271
1201-23K	18.0	75	2.5	34	2.25	213
1201-24K	22.0	75	2.5	30	2.50	202
1201-25K	24.0	60	2.5	26	2.50	202
1201-26K	27.0	60	2.5	25	2.60	198
1201-28K	30.0	65	2.5	21	2.80	191
1201-29K	33.0	65	2.5	19	3.00	185
1201-31J	36.0	60	2.5	15.5	2.50	202
1201-32J	39.0	60	2.5	14.5	2.60	198
1201-33J	43.0	60	2.5	13.7	2.70	194
1201-34J	47.0	55	2.5	13.0	2.75	193
1201-35J	51.0	55	2.5	12.7	2.85	189
1201-36J	56.0	55	2.5	12.0	3.00	184
1201-37J	62.0	55	2.5	11.5	3.15	180
1201-38J	68.0	55	2.5	11.0	3.30	176
1201-39J	75.0	55	2.5	10.5	3.70	166
1201-40J	82.0	50	2.5	10.3	3.90	162
1201-41J	91.0	50	2.5	10.0	4.30	154
1201-42J	100.0	50	2.5	9.5	4.50	151
1201-43J	110.0	60	.79	8.9	4.90	144
1201-44J	120.0	65	.79	8.7	5.20	140
1201-45J	130.0	65	.79	8.5	5.45	137
1201-46J	150.0	65	.79	8.0	6.05	130
1201-47J	160.0	65	.79	7.5	6.40	126
1201-48J	180.0	65	.79	8.0	6.05	130
1201-49J	200.0	65	.79	6.5	7.10	123
1201-50J	220.0	65	.79	6.2	7.45	117
1201-51J	240.0	65	.79	5.9	7.80	115
1201-52J	270.0	65	.79	5.7	11.0	143
1201-53J	300.0	65	.79	5.4	11.5	140
1201-54J	330.0	65	.79	5.1	12.0	136
1201-55J	360.0	65	.79	4.8	12.5	134
1201-56J	390.0	65	.79	4.5	16.3	117
1201-57J	430.0	65	.79	4.2	17.1	115
1201-58J	470.0	65	.79	3.9	17.9	112
1201-59J	510.0	65	.79	3.7	18.8	109
1201-60J	560.0	65	.79	3.8	19.5	107
1201-61J	620.0	65	.79	3.3	25.9	93
1201-62J	680.0	65	.79	3.1	27.2	91
1201-63J	750.0	65	.79	2.9	28.6	88
1201-64J	820.0	65	.79	2.7	30.0	86
1201-65J	910.0	65	.79	2.5	31.5	84
1201-66J	1000.0	65	.79	2.3	33.0	82

* Tolerance: J for 5%, K for 10%, M for 20%