

Nominal diameter    Withdraw. force    Rated current    Contact resistance

2.3 mm    -    10 A    0.6 mΩ

Highly flexible 90° patch cord with 2.3 mm (.090 in) dia. MC-hollow plugs/in-line sockets. The sleeve-shaped hard drawn copper alloy plug with solder tab is rolled, heat treated and gold plated. PVC insulated wire 0.5 mm<sup>2</sup> (20 AWG).

For operating temperature, see page 27.

Components LK 2.3-F 90:

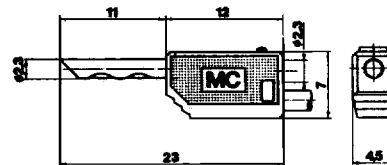

- Multilam™ plug LS 2.3-F ..... # 22.1003
- Insulator (polyamide) KT 2.3-F 90 ..... # 22.2100
- Wire Flexi-E/HK 0.50 ..... # 60.7005

Colors: 20 - 29

Type


Part No

LK 2.3-F 90


28.0031-00:  
(7.5 cm)28.0031-01:  
(15 cm)28.0031-03:  
(30 cm)28.0031-04:  
(45 cm)28.0031-06:  
(60 cm)

1.3:1

LS 2.3-F

plug only  
22.1003

KT 2.3-F90

insulator only  
22.2100

2:1

2.3 mm    -    10 A    0.6 mΩ

Highly flexible 90° patch cord with 2.3 mm (.090 in) dia. MC-hollow plugs/in-line sockets. The sleeve-shaped hard drawn copper alloy plug with solder tab is rolled, heat treated and gold plated. Silicone insulated wire 0.5 mm<sup>2</sup> (20 AWG).

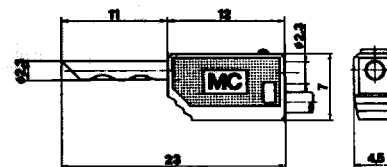

For operating temperature, see page 27.

Components LK 2.3-F 90 Sil:

- Multilam™ plug LS 2.3-F ..... # 22.1003
- Insulator (polyamide) KT 2.3-F 90 ..... # 22.2100
- Wire Sili-E 0.50 ..... # 61.7552


Colors: 21 - 25

LK 2.3-F 90 Sil


28.0032-00:  
(7.5 cm)28.0032-01:  
(15 cm)28.0032-03:  
(30 cm)28.0032-04:  
(45 cm)28.0032-06:  
(60 cm)

1.3:1

LS 2.3-F

plug only  
22.1003

KT 2.3-F90

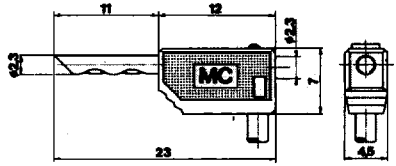
insulator only  
22.2100



2:1


20 - green/yellow    21 - black    22 - red    23 - blue    24 - yellow    25 - green    26 - violet    27 - brown    28 - gray    29 - white    33 - transparent

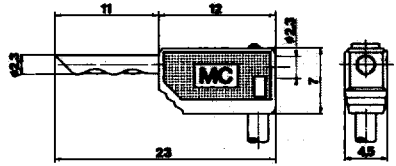
Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------



18.0029-007 7.5 cm)	LK 2.3-F 	2.3 mm	-	10 A	0.6 mΩ
18.0029-015 15 cm)					
18.0029-030 30 cm)					
18.0029-045 45 cm)					

18.0029-060 60 cm)		<p>Highly flexible patch cord with 2.3 mm (.090 in) dia. MC-hollow plugs/in-line sockets. Matching 2.3 mm (.090 in) dia. sockets. The sleeve-shaped hard drawn copper alloy plug with solder tab is rolled, heat treated and gold plated. PVC insulated wire 0.5 mm<sup>2</sup> (20 AWG).</p> <p>For operating temperature, see page 27.</p>
<p>Components for LK 2.3-F:</p> <ul style="list-style-type: none"> <li>• Multilam™ plug LS 2.3-F ..... # 22.1003</li> <li>• Insulator (polyamide) KT 2.3-F ..... # 22.2090</li> <li>• Wire Flexi-E/HK 0.50 ..... # 60.7005</li> </ul>		

<p>1.3:1</p> <p>Colors: 20 - 29</p>	<p>LS 2.3-F</p>  <p>plug only 22.1003</p>	<p>KT 2.3-F</p>  <p>insulator only 22.2090</p>	<p>2:1</p>
-------------------------------------	--	--	------------

18.0030-007 7.5 cm)	LK 2.3-F Sil 	2 mm	-	10 A	0.6 mΩ
18.0030-015 15 cm)					
18.0030-030 30 cm)					
18.0030-045 45 cm)					

18.0030-060 60 cm)		<p>Highly flexible patch cord with 2.3 mm (.090 in) dia. MC-hollow plugs/in-line sockets. Matching 2.3 mm (.090 in) dia. sockets. The sleeve-shaped hard drawn copper alloy plug with solder tab is rolled, heat treated and gold plated. PVC or silicone insulated wire 0.5 mm<sup>2</sup> (20 AWG).</p> <p>For operating temperature, see page 27.</p>
<p>Components for LK 2.3-F Sil:</p> <ul style="list-style-type: none"> <li>• Multilam™ plug LS 2.3-F ..... # 22.1003</li> <li>• Insulator (polyamide) KT 2.3-F ..... # 22.2090</li> <li>• Wire Sili-E 0.50 ..... # 61.7552</li> </ul>		

<p>1.3:1</p> <p>Colors: 21 - 25</p>	<p>LS 2.3-F</p>  <p>plug only 22.1003</p>	<p>KT 2.3-F</p>  <p>insulator only 22.2090</p>	<p>2:1</p>
-------------------------------------	--	---	------------

20 - green/yellow 21 - black 22 - red 23 - blue 24 - yellow 25 - green 26 - violet 27 - brown 28 - gray 29 - white 33 - transparent