

B-1x/1x-155-F-SSC3DS-10



Features

- Diplexer Single Mode Single Fiber 2x5 SFF SC Receptacle connector
- Wavelength Tx 1310nm/Rx 1530 nm (B-13/15-155-F-SSC3DS-10)
- Wavelength Tx 1530nm/Rx 1310 nm (B-15/13-155-F-SSC3DS-10)
- SONET OC-3 SDH STM-1 Compliant
- Single +3.3V Power Supply
- LVPECL Differential Inputs and Outputs (B-1x/1x-155-F-SSC3DS-10)
- Wave Solderable and Aqueous Washable
- Class 1 Laser Int. Safety Standard IEC-825 Compliant
- Uncooled Laser diode with MQW structure
- Complies with Telcordia (Bellcore) GR-468-CORE
- RoHS compliance available

Absolute Maximum Rating

Parameter	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{CC}	0	3.6	V	
Input Voltage	-	0	V_{CC}	V	
Output Current	I_{out}	-	30	mA	
Soldering Temperature	-	-	260	°C	10 seconds on leads only
Operating Temperature	T_{opr}	0	70	°C	
Storage Temperature	T_{stg}	-40	85	°C	

Recommended Operating Condition

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power Supply Voltage	V_{CC}	3.1	3.3	3.5	V
Operating Temperature	T_{opr}	0	-	70	°C
Data Rate	-	-	155	-	Mbps

Transmitter Specifications

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Optical						
Optical Transmit Power	P_o	-14	-	-8	dBm	Output Power is coupled into a 9/125 μ m single mode fiber
Output center Wavelength	λ	1260	1310	1360	nm	B-13/15-155-F-SSC3DS-10
Output center Wavelength	λ	1480	1530	1580	nm	B-15/13-155-F-SSC3DS-10
Output Spectrum Width	$\Delta\lambda$	-	-	3	nm	RMS(σ)
Extinction Ratio	ER	8.2	-	-	dB	
Output Eye	Compliant with ITU recommendation G.957/STM-1					
Optical Rise Time	t_r	-	-	2	ns	10% to 90% Values
Optical Fall Time	t_f	-	-	2	ns	10% to 90% Values
Optical Isolation		30	-	-	dB	Tx: 1310nm / Rx: 1550 nm
Relative Intensity Noise	RIN	-	-	-116	dB/Hz	
Total Jitter	TJ	-	-	1.0	ns	Measured with 2 ²³ -1 PRBS with 72 ones and 72 zeros.

B-1x/1x-155-F-SSC3DS-10

Transmitter Specifications

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Electrical						
Supply Current	I_{CC}	-	-	140	mA	Maximum current is specified at V_{CC} = Maximum @ maximum temperature
Differential Input Voltage	$V_{IH}-V_{IL}$	300	-	2000	mV	internally AC-coupled
Transmitter Disable Voltage	V_{DIS}	2	-	V_{CC}	V	LVTTTL input, Tx Disable pin 8
Transmitter Enable Voltage	V_{EN}	0	-	0.8	V	Tx enabled when open circuit

Receiver Specifications


Parameter	Symbol	Min	Typical	Max	Unit	Notes
Optical						
Sensitivity	-	-	-	-33	dBm	Measured with 2 ²³ -1 PRBS, BER= 10 ⁻¹⁰
Maximum Input Power	P_{in}	-3	-	-	dBm	
Signal Detect-Asserted	P_a	-	-	-33	dBm	Measured on transition: low to high (Note 1)
Signal Detect-Deasserted	P_d	-45	-	-	dBm	Measured on transition: high to low (Note 1)
Signal Detect-Hysteresis	-	1	-	4	dB	
Cross Talk	-	-	-	-33	dB	
Wavelength of Operation	-	1480	-	1600	nm	B-13/15-155-F-SSC3DS-10
Wavelength of Operation	-	1260	-	1360	nm	B-15/13-155-F-SSC3DS-10

Note 1: The SD level should be deasserted when fiber disconnected

Receiver Specifications

Parameter	Symbol	Min	Typical	Max	Unit	Note
Electrical						
Supply Current	I_{CC}	-	-	100	mA	The current excludes the output load current
Data Output Voltage-Low	$V_{OL}-V_{CC}$	-2.0	-	-1.58	V	These outputs are compatible with 10K, 10KH and 100KECL and PECL outputs
Data Output Voltage-High	$V_{OH}-V_{CC}$	-1.1	-	-0.74	V	
Signal Detect Output Voltage-Low	$V_{SDL}-V_{CC}$	-2.0	-	-1.58	V	
Signal Detect Output Voltage-High	$V_{SDH}-V_{CC}$	-1.1	-	-0.74	V	

Connection Diagram

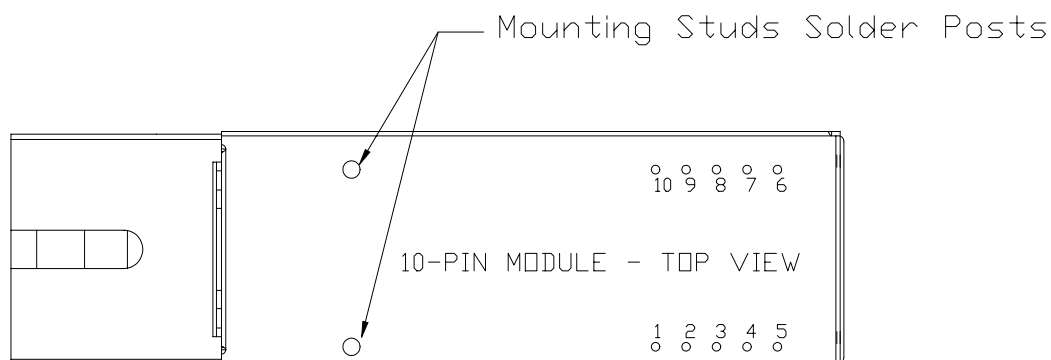


Warnings

PIN	Symbol	Notes
1	RxGND	Directly connect this pin to the receiver ground plane
2	RxVcc	+3.3V dc power for the receiver section
3	SD	Active high on this indicates a received optical signal(LVPECL/LVTTL)
4	RD-	Receiver Data Out Bar(LVPECL)
5	RD+	Receiver Data Out (LVPECL)
6	TxVcc	+3.3V dc power for the transmitter section
7	TxGND	Directly connect this pin to the transmitter ground plane
8	TxDIS	Transmitter disable(LVTTL)
9	TD+	Transmitter Data In (LVPECL)
10	TD-	Transmitter Data In Bar (LVPECL)

NOTE: C1=C2=C3=100nF

4

Recommended Circuit Board Layout

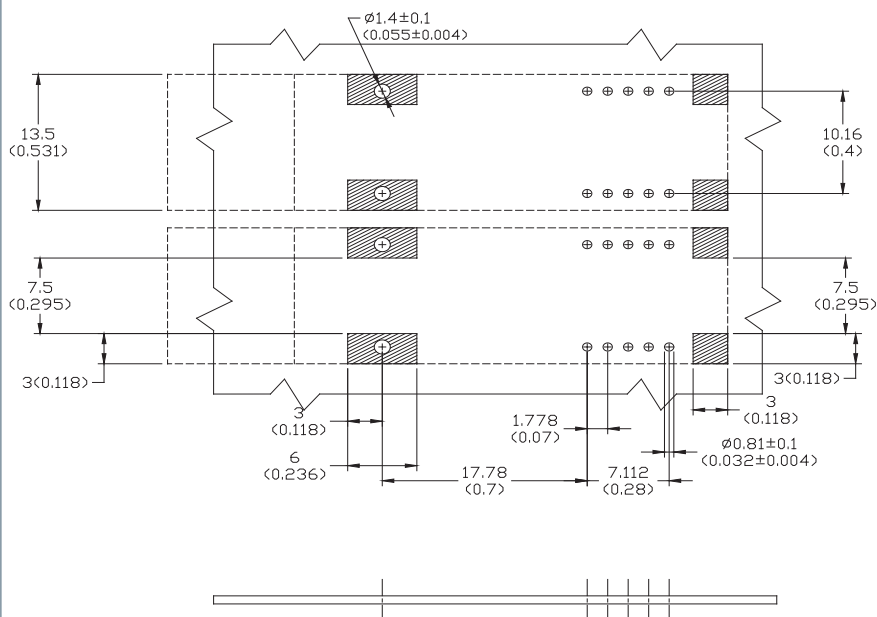


DIMENSION IN MILLIMETER (INCHES)

NOTES:

1. THIS FIGURE DESCRIBE THE RECOMMAND CIRCUIT BOARD LAYOUT FOR THE SFF TRANSCEIVER.
2. THE HATCHED AREAS ARE KEEP-OUT AREAS RESERVED FOR HOUSING STANDOFF. NO METAL TRACES OR GROUND CONNECTION IN KEEP-OUT AREAS.
3. THE MOUNTING STUDS SHOULD BE SOLDERED TO CHASSIS GROUND FOR MECHANICAL INTEGRITY.

Package Diagram

B-1x/1x-155-F-SSC3DS-10

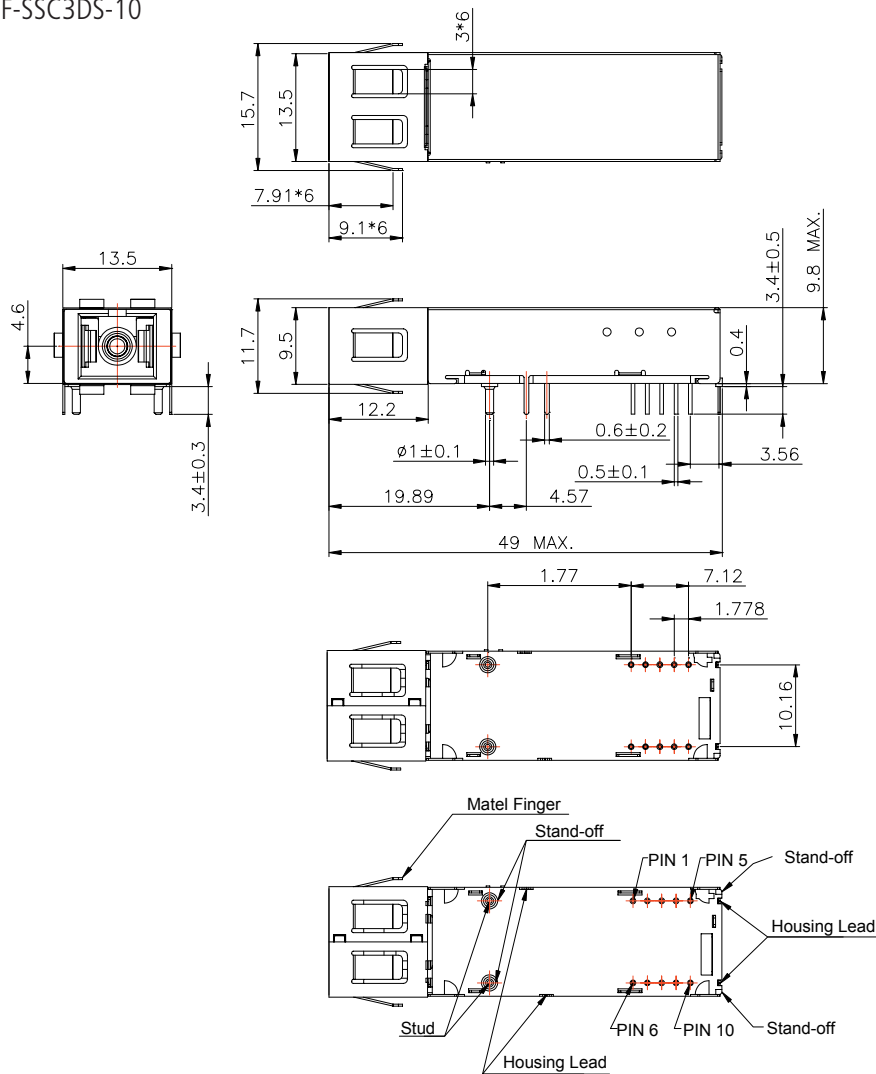

Ordering Information

Available Options:

B-13/15-155-F-SSC3DS-10
 B-15/13-155-F-SSC3DS-10
 B-13/15-155-F-SSC3DS-10-G5
 B-15/13-155-F-SSC3DS-10-G5

Part numbering Definition:

	B - 1x/1x	- 155	- F	- S	SC 3	Package	Shielding Finger	-10	-RoHS
• Wavelength	13/15: Tx Wavelength=1310nm Rx Wavelength=1530nm 15/13: Tx Wavelength=1530nm Rx Wavelength=1310nm								
• Communication protocol	LVPECL SD output								
• +3.3 V SFF Transceiver									
• Single mode fiber									
• Connector options									
• Intermediate Reach									
• Package Option	D = Black Case								
• Shielding Finger Option	S = with Shielding finger								
• -10: Molding BOSA, Removing 100R termination.									
• Ordering Information	Blank = RoHS non-compliant product G5 = RoHS compliant								

Warnings:

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notes:**IMPORTANT NOTICE!**

All information contained in this document is subject to change without notice, at LuminentOIC's sole and absolute discretion. LuminentOIC warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and LuminentOIC expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

LuminentOIC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and LuminentOIC makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. LuminentOIC customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify LuminentOIC for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that LuminentOIC is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact LuminentOIC to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

© LuminentOIC, Inc. 2003
All rights reserved