

### Features

- Extremely low jitter
- Low cost
- Express delivery
- Stability from  $\pm 20$ ppm,  $-40$  to  $+85^\circ\text{C}$
- RoHS compliant
- Serial ID with comprehensive traceability



### Description

The XPRESSO range of fully configurable oscillators utilizes a family of proprietary ASICs developed for noise reduction to provide oscillators with noise levels comparable to traditional bulk-produced quartz and SAW-based oscillators.

XPRESSO oscillators are low-cost, low-noise, with a wide frequency range, excellent ambient performance and available on very short leadtimes. All XPRESSO oscillators are 100% final tested .


### Typical applications

- Any application requiring an oscillator.
- SONET
- Ethernet
- Storage Area Networks
- Broadband Access
- Microprocessors/DSP/FPGA
- Industrial Controllers
- Test and measurement
- Fibre Channel

### Electrical Specification

Frequency Range:	0.750MHz ~ 250.0MHz
Frequency stability:	from $\pm 20$ ppm to $\pm 100$ ppm
Operating Temperature Range:	$-40^\circ \sim +85^\circ\text{C}$
Storage Temperature Range:	$-55^\circ \sim +125^\circ\text{C}$
Supply Voltage:	+3.3 Volts $\pm 5\%$
Input Current	
0.75 ~ 20MHz:	32mA max.
20+ ~ 50MHz:	35mA max.
50+ ~ 130MHz:	47mA max.
130+ ~ 200MHz:	55mA max.
200+ ~ 250MHz:	60mA max.
Output Load:	15pF standard 30pF <125MHz available
Start up Time:	10mS
Output Enable/Disable Time:	100ns
Output Low/High Voltages	
0.75 ~ 150MHz:	10%Vdd max./90%Vdd min.
150+ ~ 250MHz:	20%Vdd max./80% Vdd min.
Symmetry:	45%/55%
Rise/Fall Times	
0.75 ~ 150MHz:	3ns
150+ ~ 250MHz:	2ns
Moisture Sensitivity Level:	1
Termination Finish:	Au
Maximum Soldering Parameters:	260°C for 10 seconds

### OUTLINE & DIMENSIONS

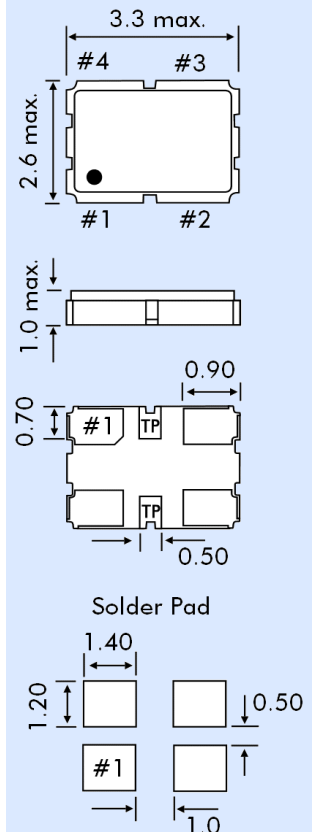

### Supply Format


Tape and Reel, 8mm tape,  
4.0mm pitch,  
1k reel = 178mm $\phi$

### Pad Connections

- 1 Enable/Disable
  - 2 Ground
  - 3 Output
  - 4 Vdd
- \* TP are test points  
- not connected

### Model Selection Guide

EQXP - H C 3 3 5 R - 106.250000

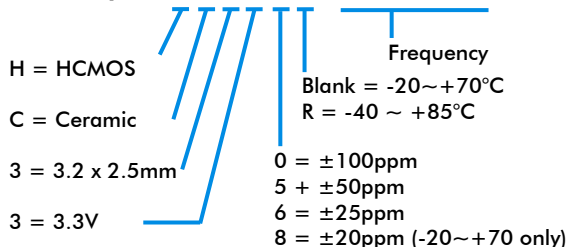

### Jitter Measurements

Frequency (MHz)	Phase Jitter (12kHz~20MHz) (ps RMS)	Time Interval Error $\sigma$ of jitter distribution (ps RMS)	Rj/Dj Composition		
			Random Jitter (Rj) (ps RMS)	Deterministic Jitter (Dj) (ps p-p)	Total Jitter (Tj) ( $14 \cdot Rj + Dj$ ) (ps)
62.5	0.8	2.9	1.2	9.2	25.6
106.25	0.8	3.2	1.3	9.0	27.2
125.0	0.8	2.3	1.2	8.7	26.5
156.25	1.0	3.0	1.2	12.7	30.0