

C-194-2630-02-S

Note: Wire supplied by others. Not assembled by Samtec.

.062" (1,60mm) CRIMP CONTACT T-1R29, C-194 SERIES

SPECIFICATIONS

For complete specifications see www.samtec.com?T-1R29

Contact Material: Brass

Plating: Au or Sn over 50µ" (1,27µm) Ni

Wire: 14 to 30 AWG

APPLICATION SPECIFIC OPTION

Assembly with wire and/or RCC1 available. Contact asp@samtec.com

ALSO AVAILABLE

Assembly tooling. Contact atg@samtec.com

Note: Some lengths, styles and options are non-standard, non-returnable.

T-1R29

WIRE SIZE

INSULATION DIAMETER


PLATING

Mates with: C-194
Contact for: RCC1

- 1414 = 14 AWG
- 1618 = 16 to 18 AWG
- 2024 = 20 to 24 AWG
- 2630 = 26 to 30 AWG

Specify INSULATION DIAMETER from chart

- S = 30µ Gold on mating area, Tin on balance
- GF = Gold Flash on mating area, Gold Flash on balance
- T = Tin

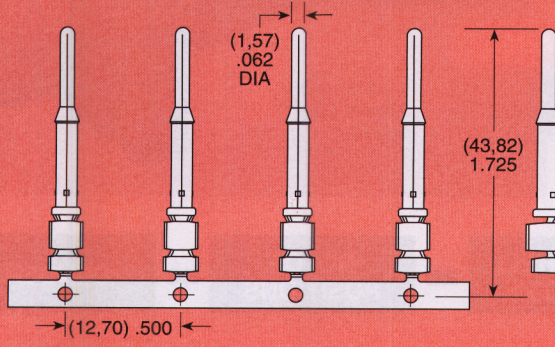

INSULATION DIAMETER	WIRE SIZE	RANGE
-01	-1414	(2,03) .080 - (2,54) .100
	-1618	(2,03) .080 - (2,54) .100
	-2024	(1,02) .040 - (2,03) .080
	-2630	(1,78) .070 - (2,54) .100
-02	-2024	(2,03) .080 - (2,54) .100
	-2630	(1,02) .040 - (1,52) .060

SPECIFICATIONS

For complete specifications see www.samtec.com?C-194

Contact Material: Phosphor Bronze

Plating: Au or Sn over 50µ" (1,27µm) Ni

Wire: 14 to 30 AWG

APPLICATION SPECIFIC OPTION

Assembly with wire and/or RCC1 available. Contact asp@samtec.com

ALSO AVAILABLE

Assembly tooling. Contact atg@samtec.com

Note: Some lengths, styles and options are non-standard, non-returnable.

C-194

WIRE SIZE

INSULATION DIAMETER


PLATING

Mates with: T-1R29
Contact for: RCC1

- 1414 = 14 AWG
- 1618 = 16 to 18 AWG
- 2024 = 20 to 24 AWG
- 2630 = 26 to 30 AWG

Specify INSULATION DIAMETER from chart

- S = 30µ Gold on mating area, Tin on balance
- GF = Gold Flash on mating area, Gold Flash on balance
- T = Tin

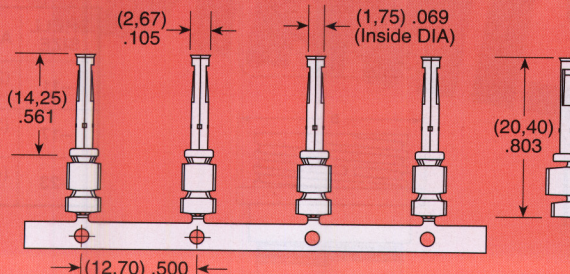

INSULATION DIAMETER	WIRE SIZE	RANGE
-01	-1414	(2,03) .080 - (2,54) .100
	-1618	(2,03) .080 - (2,54) .100
	-2024	(1,02) .040 - (2,03) .080
	-2630	(1,78) .070 - (2,54) .100
-02	-2024	(2,03) .080 - (2,54) .100
	-2630	(1,02) .040 - (1,52) .060

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM