


Miniature Fuses


UL Fuses 5x20
5TT Slow Blow
250/125VAC from 0.08 to 10A

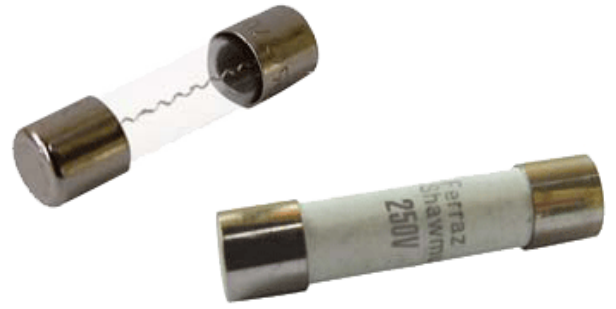

Complying with UL / CSA 248-14

Dimensions

Glass tube $\leq 5A$. Ceramic tube $\geq 6A$

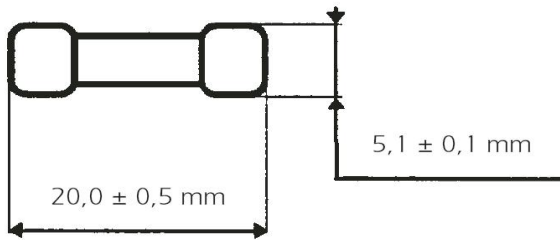


Product weight: 1.2 g max.
Packaging: in box of 1000 pieces
or in blister of 50 pieces

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity under 250V (A)	Breaking capacity under 125V (A)	Watts Loss @ 100% In (W)	Watts Loss @ 80% In (W)	Max. voltage drop (V)
5x20	MI5TT25V0.08	N207564	250	0.08*	100	10000	-	-	-
5x20	MI5TT25V0.1	P207565	250	0.1	100	10000	0.45	2.8	2.8
5x20	MI5TT25V0.125	Q207566	250	0.125	100	10000	0.48	2.3	2.3
5x20	MI5TT25V0.2	R207567	250	0.2	100	10000	0.55	1.7	1.7
5x20	MI5TT25V0.25	S207568	250	0.25	100	10000	0.58	1.4	1.4
5x20	MI5TT25V0.3	T207569	250	0.3	100	10000	0.62	1.2	1.2
5x20	MI5TT25V0.4	V207570	250	0.4	100	10000	0.66	1	2
5x20	MI5TT25V0.5	W207571	250	0.5	100	10000	0.7	0.86	0.87
5x20	MI5TT25V0.6	X207572	250	0.6	100	10000	-	-	-
5x20	MI5TT25V0.7	Y207573	250	0.7	100	10000	-	-	-
5x20	MI5TT25V0.75	Z207574	250	0.75	100	10000	0.79	0.64	0.65
5x20	MI5TT25V0.8	A207575	250	0.8	100	10000	-	-	-
5x20	MI5TT25V1	B207576	250	1	100	10000	0.85	0.52	0.52
5x20	MI5TT25V1.250	C207577	250	1.25	100	10000	0.91	0.44	0.44
5x20	MI5TT25V1.5	D207578	250	1.5	100	10000	-	-	-
5x20	MI5TT25V1.6	E207579	250	1.6	100	10000	0.97	0.37	0.37
5x20	MI5TT25V2	F207580	250	2	100	10000	1.03	0.32	0.32
5x20	MI5TT25V2.5	G207581	250	2.5	100	10000	1.1	0.27	0.27
5x20	MI5TT25V3	H207582	250	3	100	10000	1.17	0.23	0.23
5x20	MI5TT12.5V4	J207606	125	4	-	10000	1.25	0.19	0.19
5x20	MI5TT12.5V5	K207607	125	5	-	10000	1.33	0.16	0.16
5x20	MI5TT12.5V6	L207608	125	6	-	10000	1.23	0.12	0.12
5x20	MI5TT12.5V7	M207609	125	7	-	10000	-	-	-
5x20	MI5TT12.5V8	N207610	125	8	-	10000	1.31	0.1	0.1
5x20	MI5TT12.5V10	F208937	125	10	-	1000	1.4	0.09	0.09

* Non approval rating

Miniature Fuses

UL Fuses 5x20
5TT Slow Blow
250/125VAC from 0.08 to 10A

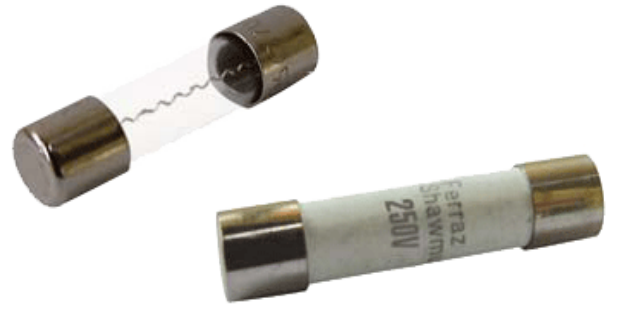

Melting Time Limits

Nominal current	100% x I _n	135% x I _n	200% x I _n
From 0.8A to 3A	4h mini	1h maxi	5s mini 30s maxi
From 4A to 10A	4h mini	1h maxi	3s mini 30s maxi

Time Current

125V - 250V 5TT 5x20

