


SMB - 50 Ohm Connectors

PC Mount

INCHES (MILLIMETERS) • CUSTOMER DRAWINGS AVAILABLE ON REQUEST




Straight Jack Receptacle

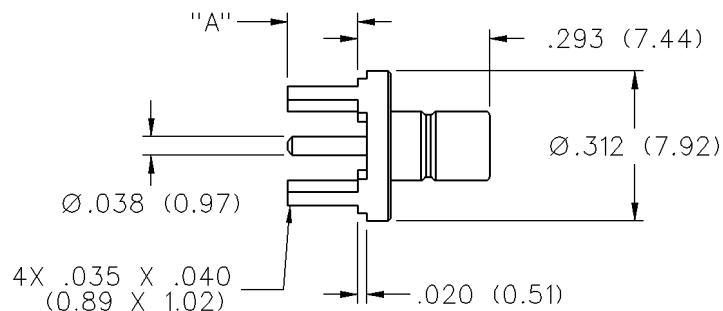

GOLD PLATED	NICKEL PLATED	IR COMPATIBLE*	"A"
131-3701-201	131-3701-206		.155 (3.94)
131-3701-211	131-3701-216	131-3701-215*	.110 (2.79)

* Tin/Lead solder dipped legs for IR Reflow Compatibility.
Mounting hole layout figure 4 page 201.


Straight Jack Receptacle - Die Cast

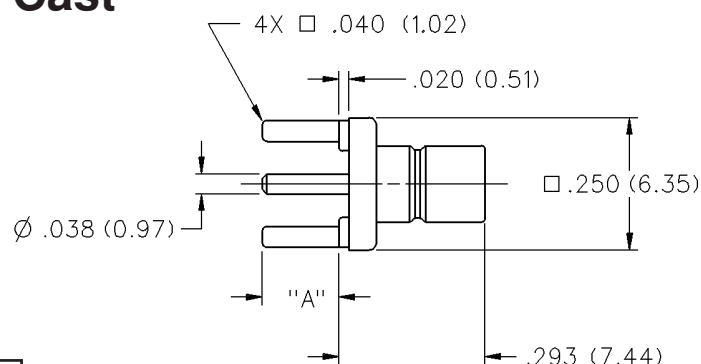

GOLD PLATED	NICKEL PLATED	IR COMPATIBLE*	"A"
131-1701-201	131-1701-206		.155 (3.94)
131-1701-211	131-1701-216	131-1701-215*	.095 (2.41)

* Tin/Lead solder dipped legs for IR Reflow Compatibility.
Mounting hole layout figure 4 page 201.

Straight Jack Receptacle

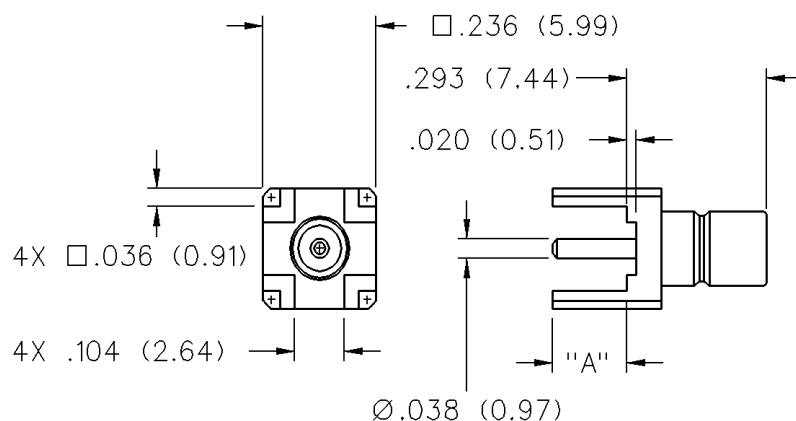

GOLD PLATED	NICKEL PLATED	IR COMPATIBLE*	"A"
131-3701-261	131-3701-266		.155 (3.94)
131-3701-271	131-3701-276	131-3701-275	.095 (2.41)

* Tin/Lead solder dipped legs for IR Reflow Compatibility.
Mounting hole layout figure 4 page 201.