

5 TAPS-DIP Delay Lines


SERIES: 1517

$$T_D/T_R = 3/1$$




Features:

- 5 Taps.
- Standard 14 pins DIP case.
- Low cost.
- Fast Delivery.



Specifications:

- Delay accuracy: $\pm 5\%$ (others on request).
- No. taps: 5 Equally spaced taps.
- Taps accuracy: $\pm 5\%$ of tap delay.
- Impedance tolerance: $\pm 10\%$ (others on request).
- Rise-Time: 30% of time delay.
- Withstanding voltage: 50 Vdc. Min.
- Temperature coefficient: 100 PPM/ $^{\circ}$ C.
- Environment: Meets or exceeds MIL-D-23859C.

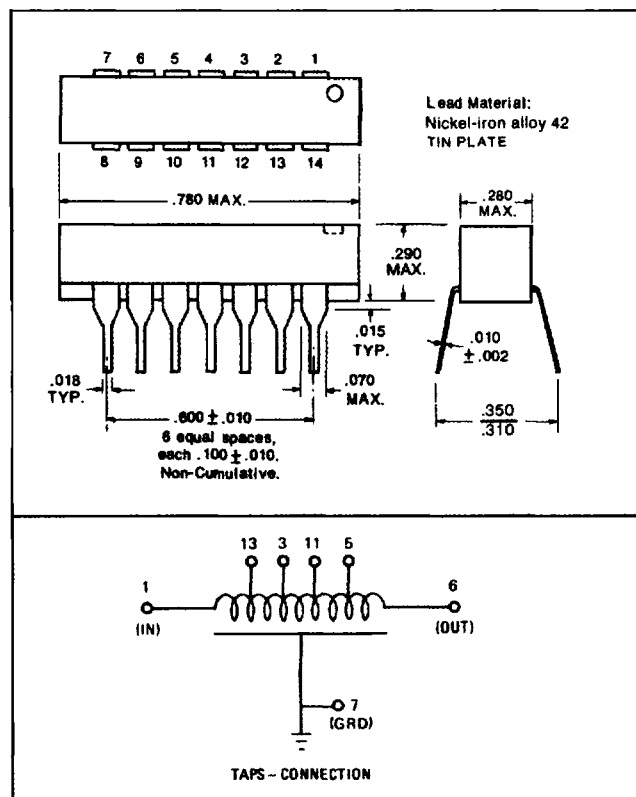

Part No.	Total Delay (ns)	Imp. (Ω)	Rdc (Ω)
1517-10A	10	50	0.6
1517-15A	15	50	0.6
1517-20A	20	50	0.7
1517-30A	30	50	0.7
1517-40A	40	50	0.9
1517-5B	5	100	0.5
1517-10B	10	100	0.7
1517-15B	15	100	0.7
1517-20B	20	100	0.9
1517-25B	25	100	1.0
1517-30B	30	100	1.5
1517-40B	40	100	1.8
1517-50B	50	100	2.0
1517-60B	60	100	2.0
1517-75B	75	100	2.5
1517-10C	10	200	1.5
1517-20C	20	200	2.0
1517-30C	30	200	2.5
1517-40C	40	200	3.0
1517-50C	50	200	3.0
1517-60C	60	200	3.5
1517-80C	80	200	3.5
1517-90C	90	200	5.0
1517-120C	120	200	5.0
1517-150C	150	200	8.0
1517-25D	25	250	2.5
1517-37D	37	250	3.0
1517-50D	50	250	3.5
1517-60D	60	250	4.0
1517-75D	75	250	4.0
1517-100D	100	250	5.0
1517-150D	150	250	8.5
1517-15E	15	300	2.5
1517-30E	30	300	3.0
1517-50E	50	300	4.0
1517-60E	60	300	4.0
1517-75E	75	300	4.5
1517-90E	90	300	5.5
1517-120E	120	300	8.0
1517-130E	130	300	9.0
1517-180E	180	300	11.0
1517-220E	220	300	13.0
1517-20F	20	400	4.5
1517-40F	40	400	5.0
1517-60F	60	400	5.0
1517-80F	80	400	8.0
1517-100F	100	400	9.0
1517-120F	120	400	10.0
1517-160F	160	400	13.0
1517-180F	180	400	14.0
1517-240F	240	400	19.0
1517-300F	300	400	23.0
1517-25G	25	500	3.0
1517-50G	50	500	5.0
1517-75G	75	500	8.0
1517-100G	100	500	15.0
1517-125G	125	500	9.0
1517-150G	150	500	13.0
1517-200G	200	500	21.0
1517-225G	225	500	23.0
1517-300G	300	500	29.0