

2.54mm (0.1") Multi Mini Jumper

Multiposition Shunt Connector





2208 Series

APPLICATION AND FEATURES

1. Difference type from 2 to 10 position.
2. Multiposition jumper versions facilitate multiprogramming.
3. Dual Beam contact.
4. 02 to 10 contacts.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator resistance:	5000 Megohms Min.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester, UL 94V-0

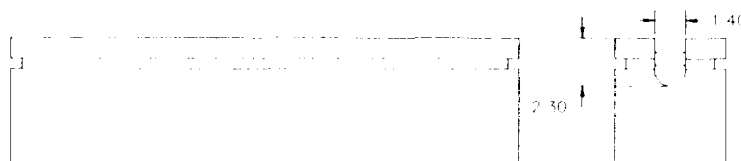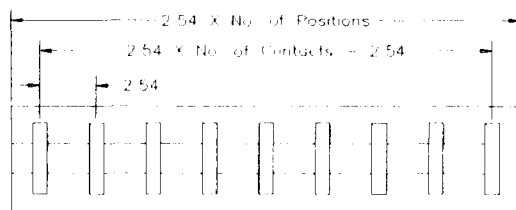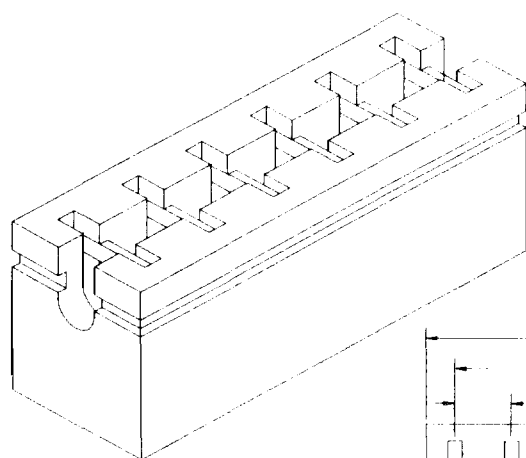

Order Information 2208 Series

Example: 2208 - 10 - 02

Series No.	Number of Contacts	Contact Plating
2208	02 to 10 Contacts	Tin Plated 01
		Gold Plated
		Flash 02
		10 μ " 10
		50 μ " 30