




## 7x7.2 Square/Single Turn/Trimming Potentiometer

-- 3362R --



### Electrical Characteristics

Standard Resistance Range.....50Ω~2MΩ

Resistance Tolerance.....±10%

Absolute Minimum Resistance.....≤1%R或10Ω

Contact Resistance Variation.....CRV≤3%或5Ω

Insulation Resistance.....R1≥1GΩ

Withstand Voltage.....700Vac

Effective Travel.....250°C

Power Rating, 300 volts max

.....0.5W@70°C,0W@125°C

Temperature Range.....-55°C~

.....±250ppm/°C

Temperature Variation.....-55°C,30min,+125°C

.....30min

.....500Hz,0.75mm,6h

.....10~

.....ΔR≤5%R,Δ(Uab/Uac)≤±7.5%R

.....390m/s<sup>2</sup>,4000cycles ΔR≤5%R

.....0.5W@70°C

.....1000h, ΔR≤10%R,R1≥100MΩ

.....200cycles

.....ΔR≤10%R,CRV≤3% or 5Ω

.....203

.....253

.....503

.....104

.....204

.....254

.....504

.....105

.....205

.....1,000,000

.....2,000,000

.....500,000

.....1,000,000



.....2,000,000

.....Tolerance is ± 0.25 if no identification

.....图中公式：除注明外均为±0.25

.....顺时针 CLOCKWISE

.....电刷 WIPER 2 (D)

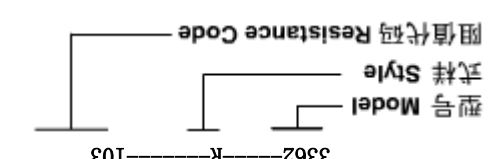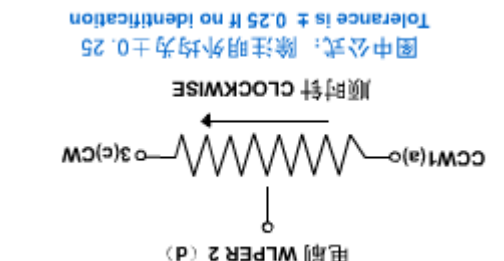

### How To Order

Starting Torque.....

### Physical Characteristics

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....


.....

.....

### Standard Resistance Table

Resistance Code	Resistance (Ohms)
100	10
200	20
500	50
101	100
201	200
501	500
102	1,000
202	2,000
502	5,000
103	10,000
203	20,000
503	50,000
104	100,000
204	200,000
504	500,000
105	1,000,000
205	2,000,000

Special resistances available

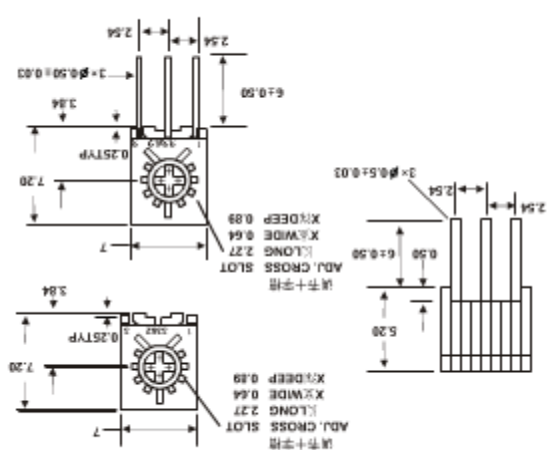

Mutual dimension.....