



PRODUCT N°	DIM"C"	DIM"D"	DIM"E"	CAP	TUBE	TAPE	PRINTING	P/Ns AVAILABLE	PACKAGING DOC.
91614-XXX	SEE TABLE SHEET 2/2			NO	YES	NO	NO	SEE TABLE & NOTE 6	GES 14-621
91614-XXXX				NO	YES	NO	YES	SHEET 2/2	GES 14-621
91614-XXXX				YES	NO	YES	NO	SEE TABLE SHEET 2/2	TA 856


TOP ENTRY LAYOUT

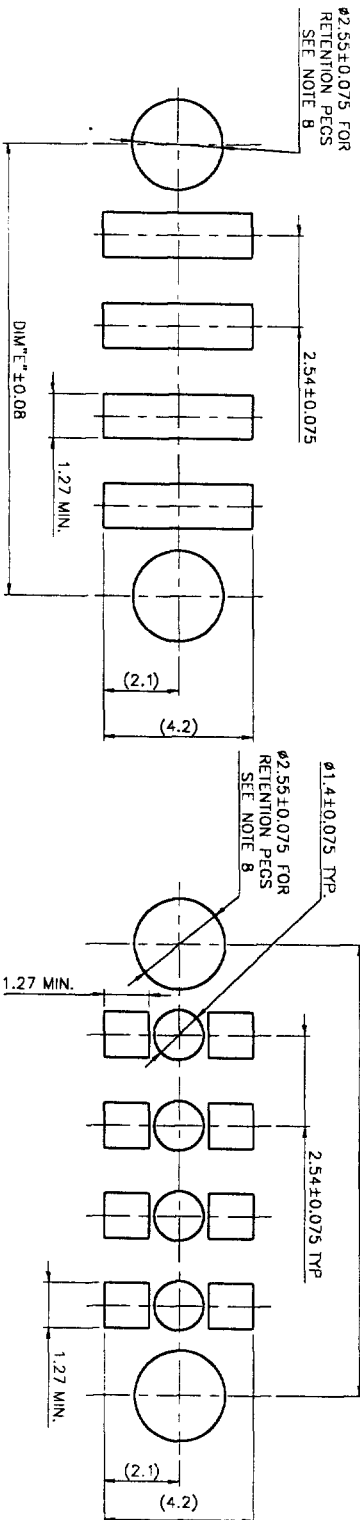

DUAL ENTRY LAYOUT

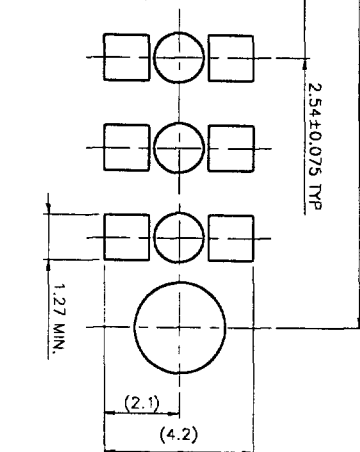

SEE NOTE 5

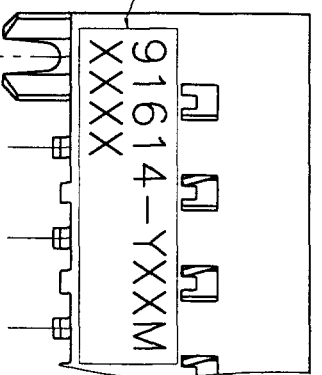


PRODUCT DESCRIPTION CODE:

91614-XXXX XXXX

SEE NOTE 4
FOR OTHER OPTION
LETTERS SEE TABLE
NUMBER OF POSITIONS
PLATING CODE

NOTES:

- HOUSING & CAP MATERIAL: PCT, HIGH TEMPERATURE 30% GLASS FILLED, COLOUR GREY. FLAME RETARDANT PER UL-94 CATEGORY VO.
 - TERMINAL MATERIAL: PHOSPHOR BRONZE EXTRA HARD.
 - THE DASH "M" AT THE END OF PART NUMBER INDICATES THE PRINTING.
 - PRINTING METHOD FOR 91614-Y03 UP TO -Y50. PART NUMBER AND CODE DATE 0.8 ±0.3 HEIGHT CHARACTERS IN BLACK INK SHOWN.
- 91614-XXXX XXXX
- WEEK CODE
YEAR CODE
FOR OTHER OPTION LETTERS SEE TABLE
- PRINTING METHOD FOR 91614-Y03 UP TO -Y07.
 - SOLDERING RECOMMENDATIONS:
SOLDER PASTE: 60Sn/38Pb/2Ag.
 - RECOMMENDED IIR PROFILE PER TA 842
 - 0.265 MIN FOR PICK & PLACE ASSEMBLY ZERO INSERTION FORCE

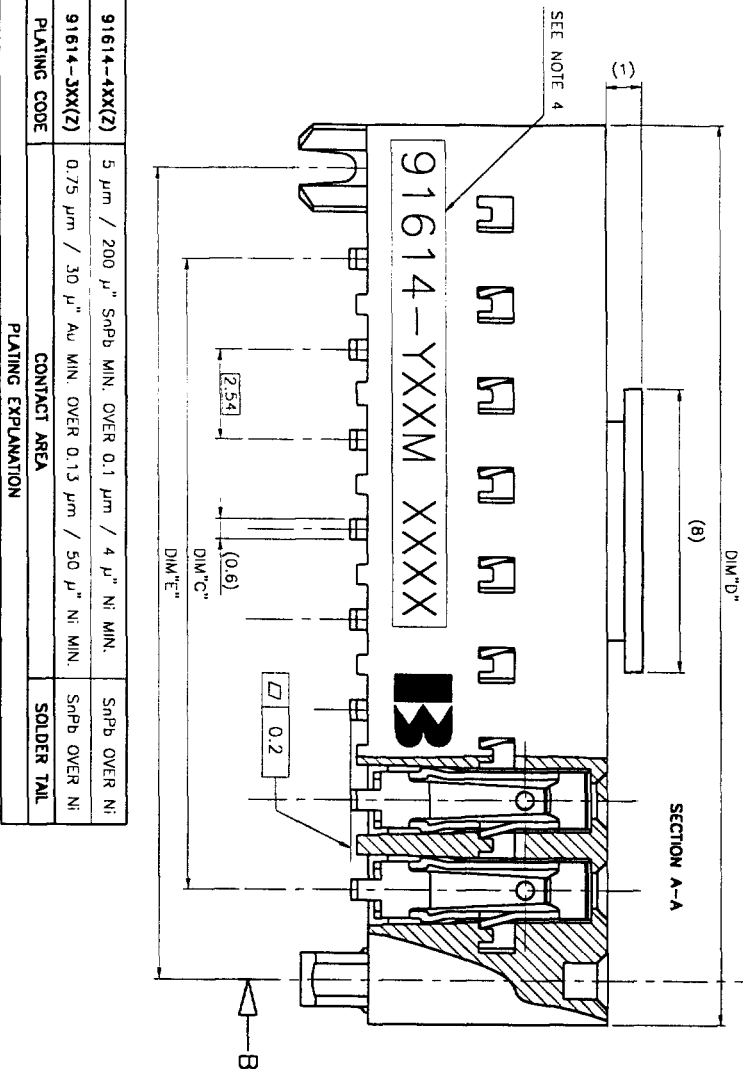

SECTION A-A

SECTION B-B

91614-4XX(Z)	5 µm / 200 µm SnPb MIN. OVER 0.1 µm / 4 µm Ni MIN.	SnPb OVER Ni
91614-3XX(Z)	0.75 µm / 30 µm Au MIN. OVER 0.13 µm / 50 µm Ni MIN.	SnPb OVER Ni
PLATING CODE	CONTACT AREA	SOLDER TAIL

REF. CODE	SYMBOL	UNIT	DESCRIPTION	VALUE	UNIT	DESCRIPTION	VALUE
1	1	mm	1	1	mm	1	1
2	2	mm	2	2	mm	2	2
3	3	mm	3	3	mm	3	3
4	4	mm	4	4	mm	4	4
5	5	mm	5	5	mm	5	5
6	6	mm	6	6	mm	6	6
7	7	mm	7	7	mm	7	7
8	8	mm	8	8	mm	8	8
9	9	mm	9	9	mm	9	9
10	10	mm	10	10	mm	10	10
11	11	mm	11	11	mm	11	11
12	12	mm	12	12	mm	12	12
13	13	mm	13	13	mm	13	13
14	14	mm	14	14	mm	14	14
15	15	mm	15	15	mm	15	15
16	16	mm	16	16	mm	16	16
17	17	mm	17	17	mm	17	17
18	18	mm	18	18	mm	18	18
19	19	mm	19	19	mm	19	19
20	20	mm	20	20	mm	20	20
21	21	mm	21	21	mm	21	21
22	22	mm	22	22	mm	22	22
23	23	mm	23	23	mm	23	23
24	24	mm	24	24	mm	24	24
25	25	mm	25	25	mm	25	25
26	26	mm	26	26	mm	26	26
27	27	mm	27	27	mm	27	27
28	28	mm	28	28	mm	28	28
29	29	mm	29	29	mm	29	29
30	30	mm	30	30	mm	30	30
31	31	mm	31	31	mm	31	31
32	32	mm	32	32	mm	32	32
33	33	mm	33	33	mm	33	33
34	34	mm	34	34	mm	34	34
35	35	mm	35	35	mm	35	35
36	36	mm	36	36	mm	36	36
37	37	mm	37	37	mm	37	37
38	38	mm	38	38	mm	38	38
39	39	mm	39	39	mm	39	39
40	40	mm	40	40	mm	40	40
41	41	mm	41	41	mm	41	41
42	42	mm	42	42	mm	42	42
43	43	mm	43	43	mm	43	43
44	44	mm	44	44	mm	44	44
45	45	mm	45	45	mm	45	45
46	46	mm	46	46	mm	46	46
47	47	mm	47	47	mm	47	47
48	48	mm	48	48	mm	48	48
49	49	mm	49	49	mm	49	49
50	50	mm	50	50	mm	50	50
51	51	mm	51	51	mm	51	51
52	52	mm	52	52	mm	52	52
53	53	mm	53	53	mm	53	53
54	54	mm	54	54	mm	54	54
55	55	mm	55	55	mm	55	55
56	56	mm	56	56	mm	56	56
57	57	mm	57	57	mm	57	57
58	58	mm	58	58	mm	58	58
59	59	mm	59	59	mm	59	59
60	60	mm	60	60	mm	60	60
61	61	mm	61	61	mm	61	61
62	62	mm	62	62	mm	62	62
63	63	mm	63	63	mm	63	63
64	64	mm	64	64	mm	64	64
65	65	mm	65	65	mm	65	65
66	66	mm	66	66	mm	66	66
67	67	mm	67	67	mm	67	67
68	68	mm	68	68	mm	68	68
69	69	mm	69	69	mm	69	69
70	70	mm	70	70	mm	70	70
71	71	mm	71	71	mm	71	71
72	72	mm	72	72	mm	72	72
73	73	mm	73	73	mm	73	73
74	74	mm	74	74	mm	74	74
75	75	mm	75	75	mm	75	75
76	76	mm	76	76	mm	76	76
77	77	mm	77	77	mm	77	77
78	78	mm	78	78	mm	78	78
79	79	mm	79	79	mm	79	79
80	80	mm	80	80	mm	80	80
81	81	mm	81	81	mm	81	81
82	82	mm	82	82	mm	82	82
83	83	mm	83	83	mm	83	83
84	84	mm	84	84	mm	84	84
85	85	mm	85	85	mm	85	85
86	86	mm	86	86	mm	86	86
87	87	mm	87	87	mm	87	87
88	88	mm	88	88	mm	88	88
89	89	mm	89	89	mm	89	89
90	90	mm	90	90	mm	90	90
91	91	mm	91	91	mm	91	91
92	92	mm	92	92	mm	92	92
93	93	mm	93	93	mm	93	93
94	94	mm	94	94	mm	94	94
95	95	mm	95	95	mm	95	95
96	96	mm	96	96	mm	96	96
97	97	mm	97	97	mm	97	97
98	98	mm	98	98	mm	98	98
99	99	mm	99	99	mm	99	99
100	100	mm	100	100	mm	100	100

CUSTOMER
FCI
ELECTRONICS
SMT EXTERNAL
LOCATING
91614