
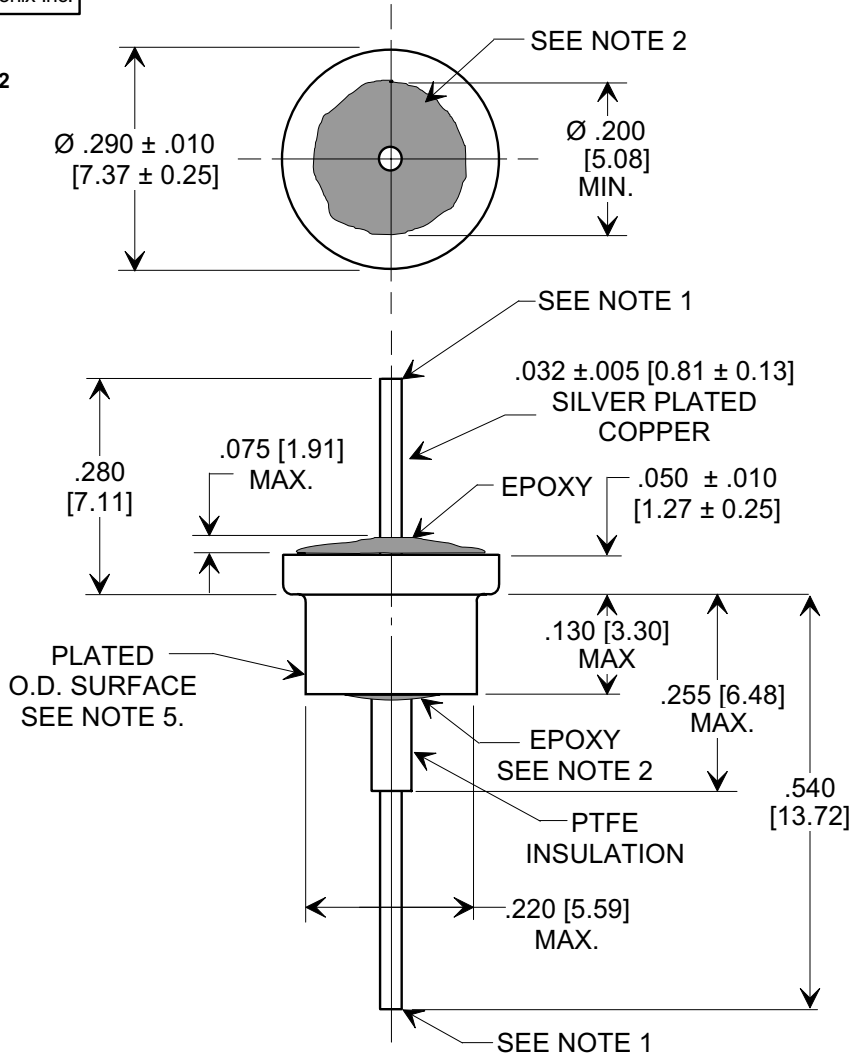



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



**SPECIFICATIONS**

CAP. VALUE:	1000 pF
CAP. TOL.:	+100, -0%
D.F.:	4% MAX.
RATING:	250 VAC @ +85°C
OPERATING RANGE:	-55°C TO +85°C
DWV (25°C):	1500 VAC
I.R.:	10 G $\Omega$ MIN.
IDC:	10 A

**NOTES:**

1. ENDS OF LEADS MAY SHOW EXPOSED COPPER.
2. EPOXY COATED INSULATION BANDS: COVERAGE OF TOP AS SHOWN, COVERAGE OF BOTTOM .100" [2.54] DIA. MIN. (MAY OVERLAP ONTO OD SURFACE .020" [0.51] MAX.)
3. COMMERCIAL PART, MANUFACTURED AND INSPECTED TO APPLICABLE REQUIREMENTS OF U.L. STANDARD 1283.
4. TUSONIX STANDARD PART NUMBER: 2470-000.  
TUSONIX RoHS COMPLIANT PART NUMBER: 2470-000 LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
5. PLATED DIELECTRIC FINISH: STANDARD PART #: 60/40 SOLDER PLATED. RoHS PART #: TIN PLATED.
6. PART MARKING: STANDARD PART: NO MARKING. RoHS PART: GREEN INK DOT.

X-2015 Rev-0

<b>REVISION RECORD</b>	Original Release	WAS SK 8080-009. SM 10-15-04	0
	C.O.	20041014-1-05	ADDED NOTES 4 - 6. RESCALED. SM 02-02-06
		20060109-1-02	1

<b>--TOLERANCES--</b> Unless Otherwise Specified		Title	
DECIMAL $\pm$ .031 [0.79]		<b>SHOULDER FEED-THRU</b>	
ANGLES $\pm$	Drawn	S.M. 09-22-04	Scale 4 X
<b>TUSONIX</b> TUCSON, ARIZONA	Approved	K.L. 09-22-04	
	<b>A</b>	<b>2470-000</b>	