

# Bias-Tee

50Ω    Wideband    20 to 2500 MHz


## Maximum Ratings

|                                                                |                |
|----------------------------------------------------------------|----------------|
| Operating Temperature                                          | -40°C to 85°C  |
| Storage Temperature                                            | -55°C to 100°C |
| RF Power                                                       | 30dBm max.     |
| Voltage at DC port                                             | 25V max.       |
| Input Current                                                  | 200mA          |
| Permanent damage may occur if any of these limits are exceeded |                |


## Pad Terminations

|                         |   |
|-------------------------|---|
| RF                      | 4 |
| RF&DC                   | 3 |
| DC                      | 1 |
| ISOLATE(see PCB Layout) | 2 |

## Outline Drawing

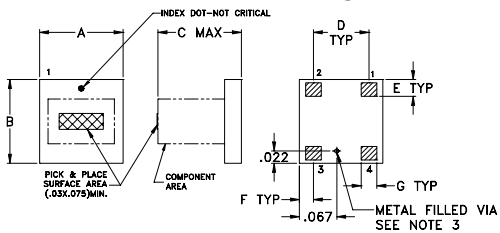


### PCB Land Pattern



## Outline Dimensions (inch)

| A    | B    | C    | D     | E    | F    | G    |
|------|------|------|-------|------|------|------|
| .150 | .150 | .150 | .100  | .030 | .025 | .028 |
| 3.81 | 3.81 | 3.81 | 2.54  | 0.76 | 0.64 | 0.71 |
| H    | J    | K    | wt    |      |      |      |
| .050 | .160 | .030 | grams |      |      |      |
| 1.27 | 4.06 | 0.76 | 0.10  |      |      |      |

**Demo Board MCL P/N: TB-268**  
**Suggested PCB Layout (PL-146)**

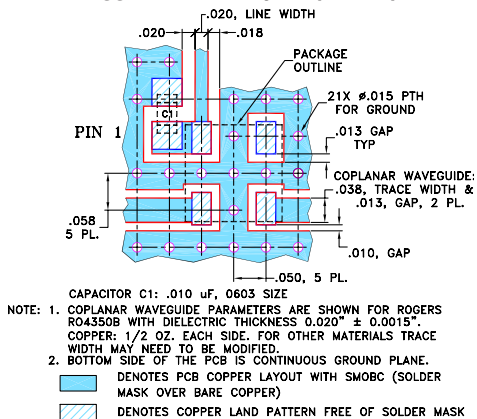

## Features

- wideband, 20 to 2500 MHz
- low insertion loss, 0.4 dB typ.
- miniature surface mount 0.15"x0.15"
- aqueous washable
- protected by US Patent 7,012,486

## Applications

- biasing amplifiers
- biasing of laser diodes
- biasing of active antennas

## Bias-Tee Electrical Specifications

| FREQUENCY<br>(MHz) |                | INSERTION LOSS<br>(dB) |      |      |      |      |      | ISOLATION (dB)<br>(RF port to DC port)<br>(RF&DC port to DC port) |      |      |      |      |      | VSWR<br>(:1) |      |      |      |      |      |
|--------------------|----------------|------------------------|------|------|------|------|------|-------------------------------------------------------------------|------|------|------|------|------|--------------|------|------|------|------|------|
|                    |                | L                      |      | M    |      | U    |      | L                                                                 |      | M    |      | U    |      | L            |      | M    |      | U    |      |
| f <sub>L</sub>     | f <sub>U</sub> | Typ.                   | Max. | Typ. | Max. | Typ. | Max. | Typ.                                                              | Min. | Typ. | Min. | Typ. | Min. | Typ.         | Max. | Typ. | Max. | Typ. | Max. |
| 20                 | 2500           | 0.2                    | 0.8  | 0.35 | 0.8  | 0.7  | 1.2  | 65                                                                | 40   | 44   | 25   | 40   | 20   | 1.05         | 1.5  | 1.05 | 1.2  | 1.1  | 1.25 |

L= 20-200 MHz    M=200-1250 MHz    U=1250-2500 MHz  
External C1(0.01μF) is required. See functional schematic and PCB layout.

## Typical Performance Data

| FREQUENCY<br>(MHz) | INSERTION LOSS (dB)<br>with current |      |       | VSWR (:1)<br>with current |      |       |
|--------------------|-------------------------------------|------|-------|---------------------------|------|-------|
|                    | 0mA                                 | 50mA | 100mA | 0mA                       | 50mA | 100mA |
| 20.00              | 0.24                                | 0.22 | 0.27  | 1.09                      | 1.03 | 1.17  |
| 30.00              | 0.22                                | 0.22 | 0.24  | 1.08                      | 1.03 | 1.09  |
| 50.00              | 0.20                                | 0.21 | 0.21  | 1.11                      | 1.08 | 1.02  |
| 100.00             | 0.20                                | 0.24 | 0.32  | 1.01                      | 1.03 | 1.07  |
| 250.00             | 0.21                                | 0.23 | 0.31  | 1.02                      | 1.01 | 1.02  |
| 400.00             | 0.21                                | 0.22 | 0.30  | 1.01                      | 1.02 | 1.03  |
| 500.00             | 0.23                                | 0.24 | 0.31  | 1.04                      | 1.03 | 1.04  |
| 750.00             | 0.26                                | 0.28 | 0.35  | 1.04                      | 1.03 | 1.04  |
| 900.00             | 0.29                                | 0.31 | 0.37  | 1.02                      | 1.02 | 1.03  |
| 1000.00            | 0.32                                | 0.34 | 0.40  | 1.03                      | 1.02 | 1.03  |
| 1450.00            | 0.51                                | 0.51 | 0.56  | 1.10                      | 1.09 | 1.11  |
| 1900.00            | 0.70                                | 0.68 | 0.75  | 1.02                      | 1.03 | 1.05  |
| 2350.00            | 0.73                                | 0.76 | 0.85  | 1.08                      | 1.09 | 1.09  |
| 2800.00            | 0.69                                | 0.74 | 0.83  | 1.08                      | 1.09 | 1.08  |
| 3250.00            | 0.71                                | 0.76 | 0.85  | 1.07                      | 1.09 | 1.07  |

## Functional Schematic

