

6

5

4

3

2

1





MATERIAL AND FINISH

Insulator: Thermoplastic, UL-94V-0 Rated
Contact: Copper Alloys, Plating (see chart)

ELECTRICAL SPECIFICATIONS:

Current Rating: 1A
Contact Resistance: 30 mohm max.
Dielectric Withstanding Voltage: 1000 VAC for 1 min.
Insulation Resistance: 5000 Mohm min. @ 500 VDC

Operating temperature: -55°C to +105°C

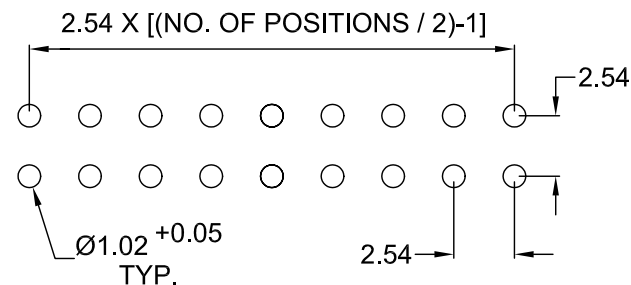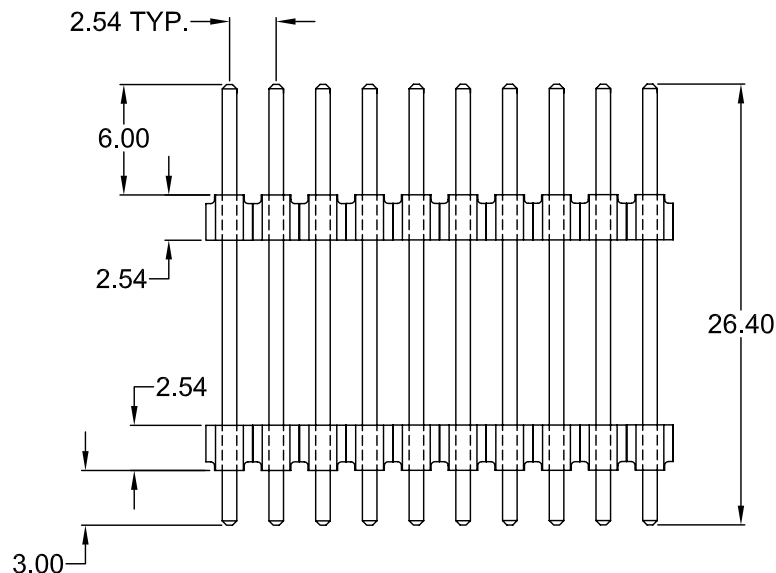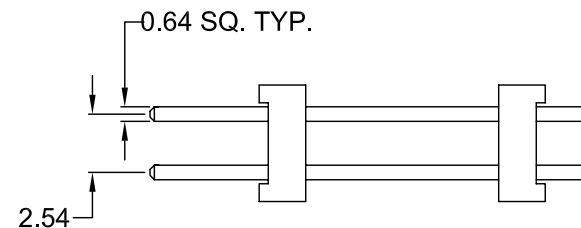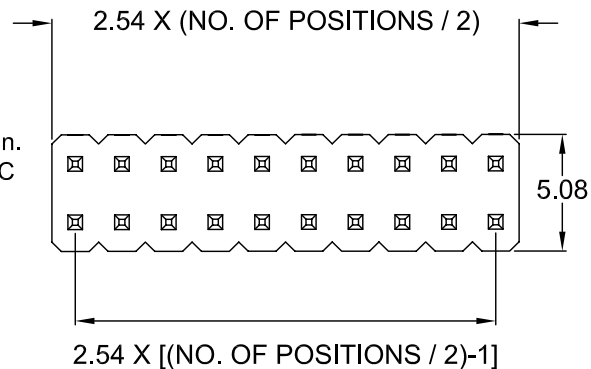

RECOMMENDED
PCB LAYOUT

P/N	PLATING
TDMD-0XX	Gold Flash
TDMD-0XX-T	TIN
TDMD-0XX-1	5 µ" Gold
TDMD-0XX-2	10 µ" Gold
TDMD-0XX-3	15 µ" Gold
TDMD-0XX-4	30 µ" Gold
TDMD-0XX-5	50 µ" Gold

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY
BY
CHECK BY
BY
APPR BY
BY

DATE: 3/1/00
DATE:
DATE:

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: PIN HEADER; DOUBLE ROW
STACKED; 2.54 PITCH; 04 - 80 CONTACT

PART #: **TDMD-0XX-X**

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

SHEET
1 of 1

REV:

6

5

4

3

2

1

REVISIONS

CHNG CHECK APPR
CHANGE
DATE

A

A