


1278898-1 Product Details

 [Live Product Chat](#)

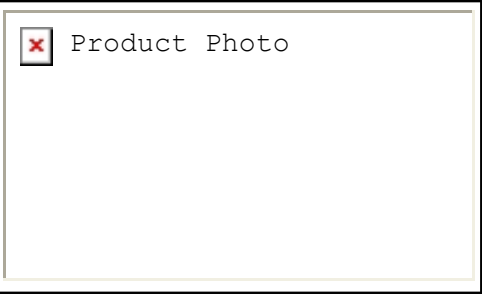

1278898-1

TE Internal Number: 1278898-1



[Superseded](#)

[Search for Replacement Parts](#)

Fiber Optic Cable Assemblies

[Not EU RoHS or ELV Compliant](#) ([Find RoHS Compliant Alternates](#))

Product Highlights:

- Cable Assembly
- Fiber Type = 62.5/125
- Cable Assembly Type = MT-RJ SECURE to ST (2.5mm Bayonet)
- MT-RJ SECURE Connector, ST Connector
- Multimode

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [MT-RJ SECURE OPTICAL FIBER CABLING SYSTEM FOR SECURE...](#) (PDF, English)
- [AMP NETCONNECT PRODUCT CATALOG](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Cable Assembly
- Cable Assembly Type = MT-RJ SECURE to ST (2.5mm Bayonet)
- Connector = MT-RJ SECURE, ST
- Comment = ST end has Ceramic Ferrule.

Mechanical Attachment:

- AMP Logo = With

Termination Related Features:

- [Mode](#) = Multimode
- Insertion Loss (dB) = 0.75

Body Related Features:

- [Fiber Type](#) = 62.5/125
- Cable Diameter (mm [in]) = 1.80 x 3.60 [.071 x .142]
- Number of Fibers = 2
- Flammability Rating = Low Smoke Zero Halogen (LSZH)
- Cable Color = Orange
- Length (M [ft]) = 1.00 [3.281]
- Connector Color = Red
- Ferrule Material = Polymer Composite

Contact Related Features:

- Boot Body Style - Left = Standard
- Boot Color - Left = Beige
- Boot Body Style - Right = Long
- Boot Color - Right = Beige
- Fibre Channel = No

Configuration Related Features:

- [Cable Type](#) = Zipcord
- [Cable Buffering](#) = Tight
- Connector(s) Exit Angle to Connector(s) Exit Angle = 180? to 180?

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process

Other:

- Brand = AMP