

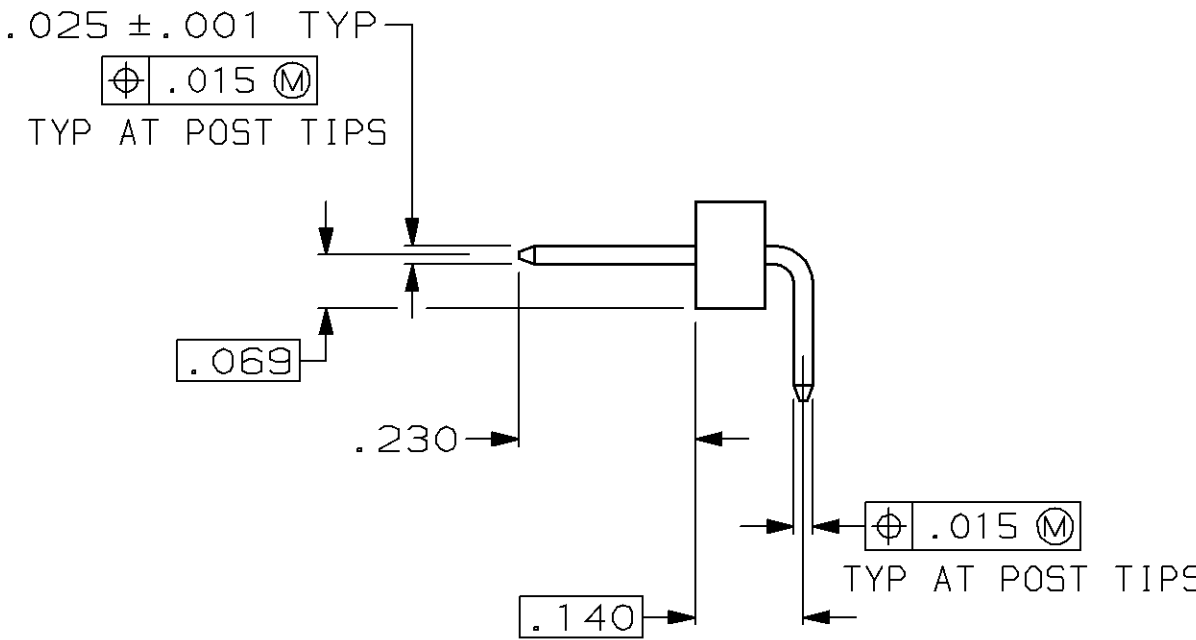
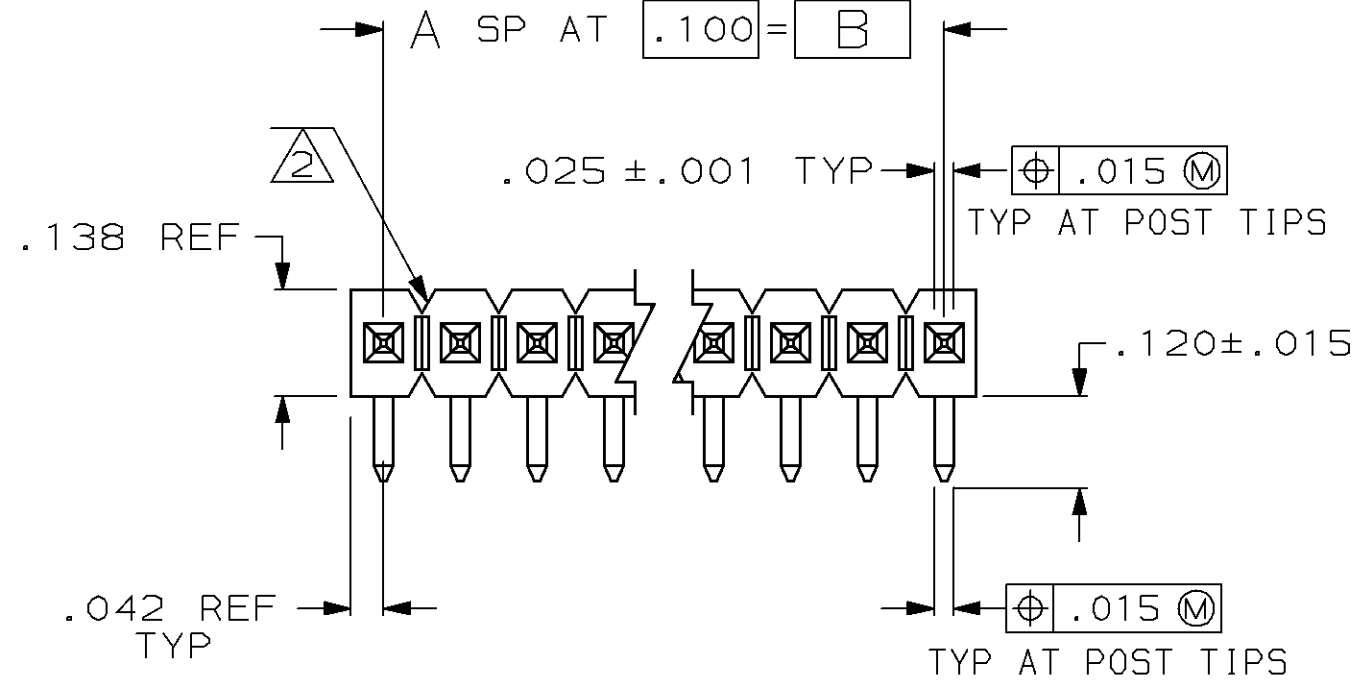


LOC	DIST	P	F	REVISIONS					
				ZONE	LTR	DESCRIPTION		DATE	APPD
AD	39				C	REV PER ECN 0010-0187-92		11/23/92	JK
				D	REV PER 0010-1752-93 TT		12-08-93	GD	
				E	EC 0010-1601-95		2/20/97	GD	

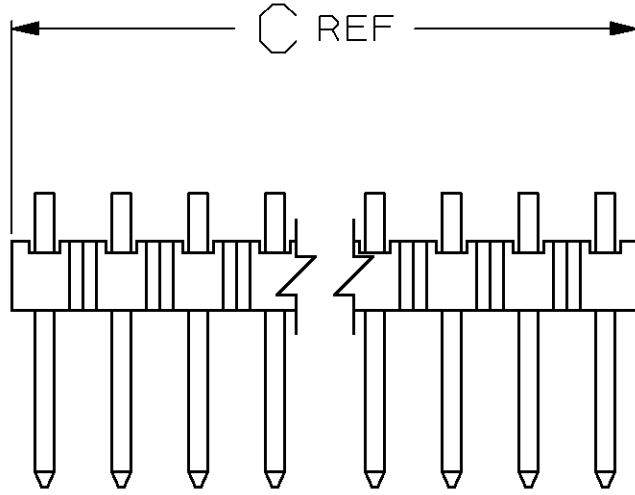

1. ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
2. BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT

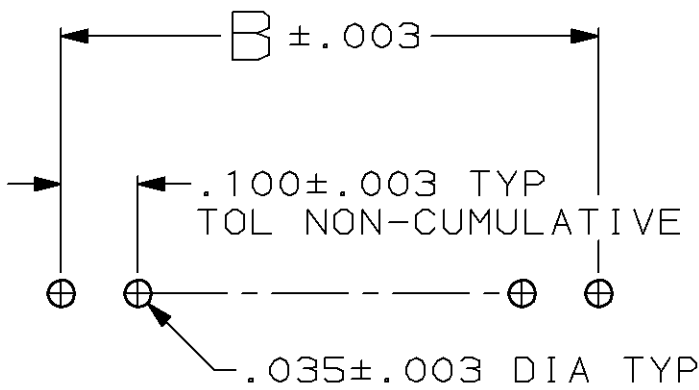

RECOMMENDED HOLE LAYOUT

3.984	3.900	39	40	4-103329-0
3.884	3.800	38	39	3-103329-9
3.784	3.700	37	38	3-103329-8
3.684	3.600	36	37	3-103329-7
3.584	3.500	35	36	3-103329-6
3.484	3.400	34	35	3-103329-5
3.384	3.300	33	34	3-103329-4
3.284	3.200	32	33	3-103329-3
3.184	3.100	31	32	3-103329-2
3.084	3.000	30	31	3-103329-1
2.984	2.900	29	30	3-103329-0
2.884	2.800	28	29	2-103329-9
2.784	2.700	27	28	2-103329-8
2.684	2.600	26	27	2-103329-7
2.584	2.500	25	26	2-103329-6
2.484	2.400	24	25	2-103329-5
2.384	2.300	23	24	2-103329-4
2.284	2.200	22	23	2-103329-3
2.184	2.100	21	22	2-103329-2
2.084	2.000	20	21	2-103329-1
1.984	1.900	19	20	2-103329-0
1.884	1.800	18	19	1-103329-9
1.784	1.700	17	18	1-103329-8
1.684	1.600	16	17	1-103329-7
1.584	1.500	15	16	1-103329-6
1.484	1.400	14	15	1-103329-5
1.384	1.300	13	14	1-103329-4
1.284	1.200	12	13	1-103329-3
1.184	1.100	11	12	1-103329-2
1.084	1.000	10	11	1-103329-1
.984	.900	9	10	1-103329-0
.884	.800	8	9	103329-9
.784	.700	7	8	103329-8
.684	.600	6	7	103329-7
.584	.500	5	6	103329-6
.484	.400	4	5	103329-5
.384	.300	3	4	103329-4
.284	.200	2	3	103329-3
.184	.100	1	2	103329-2
.084	—	—	1	103329-1
C	B	A	NO OF POSN	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON : 2 PLC DEC ± . 3 PLC DEC ± .005 ANGLES ±			DR 10/16/92 J.MARTINELLI CHK 11/23/92 JOHN KNITTLE APPD 11/23/92 JOHN KNITTLE		AMP Incorporated Harrisburg, PA 17105-3608	
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK			APPD 11/23/92 B.FLINCHBAUGH PRODUCT SPEC		NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100¢, RIGHT ANGLE, WITH .025 SQUARE POSTS	
POSTS: PHOS BRONZE FINISH POSTS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL			APPLICATION SPEC		SIZE D	CAGE CODE 00779
WEIGHT			—		SCALE 4:1	DRAWING NO C- 103329
					SHEET 1 OF 1	

[Help/Glossary](#)

Click to activate links to all other products

AMP

.100 Centerline Through Hole Headers

AMP

103329-1 -- 8 of 9 products

Active Active

(Tyco Electronics P/N: 103329-1)

Product Availability

Document Title: ASSEMBLY, HEADER, BREAKAWAY,
MOD II, SINGLE ROW, .100@22, RIGHT ANGLE, WITH
.025 SQUARE POSTS

[163550.pdf](#) [163550.pdf](#) (63K)

The photographs and/or line drawings below are representative images of a product for viewing purposes only.

Product Photo

Searchable Features:

Brand:	AMP
Header Type:	Breakaway
No. of Rows:	Single
No. of Positions:	1
Mount Angle:	Right Angle
PCB Retention Feature:	Without
Surface Mount Compatible:	No
Contact Mating Area Plating:	Tin-Lead
Board Standoff:	Without
Mounting Ears:	Without
Panel Attachment:	No
Mating Connector Lock:	Without
High Temperature Housing:	No
High Speed Serial Data Connector:	No
Termination Post Length (mm [in]):	3.05 [.120]

Other Properties:

Centerline Spacing (mm [in]):	2.54 [.100]
Post Size (mm [in]):	0.64 [.025] Sq.
Mating Post Length (mm [in]):	5.84 [.230]
Contact Material:	Phosphor Bronze
Solder Tail Plating:	Tin-Lead over Nickel
Housing Material:	Thermoplastic
Housing Flammability Rating:	UL 94V-0
Comment:	Headers may be broken to desired number of positions using Hand Tool No. 91406-1, or Tool Kit No. 314818-1. Other tail lengths are available, consult AMP Incorporated.

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Brands](#) | [Industries](#) | [Customer Service](#) | [About](#) | [Home](#)