


SIPMOS® Small-Signal Transistor

- N channel
- Enhancement mode
- Logic Level
- Avalanche rated
- $V_{GS(th)} = 0.8 \dots 2.0 \text{ V}$



Type	V_{DS}	I_D	$R_{DS(on)}$	Package	Marking
BSP 372	100 V	1.7 A	0.31 Ω	SOT-223	BSP 372

Type	Ordering Code	Tape and Reel Information
BSP 372	Q 67000-S300	E6327

Maximum Ratings

Parameter	Symbol	Values	Unit
Continuous drain current $T_A = 28 \text{ }^\circ\text{C}$	I_D	1.7	A
DC drain current, pulsed $T_A = 25 \text{ }^\circ\text{C}$	I_{Dpuls}	6.8	
Avalanche energy, single pulse $I_D = 1.7 \text{ A}, V_{DD} = 25 \text{ V}, R_{GS} = 25 \Omega$ $L = 23.3 \text{ mH}, T_j = 25 \text{ }^\circ\text{C}$	E_{AS}	45	mJ
Gate source voltage	V_{GS}	± 14	
Gate-source peak voltage, aperiodic	V_{gs}	± 20	V
Power dissipation $T_A = 25 \text{ }^\circ\text{C}$	P_{tot}	1.8	

Maximum Ratings

Parameter	Symbol	Values	Unit
Chip or operating temperature	T_j	-55 ... + 150	°C
Storage temperature	T_{stg}	-55 ... + 150	
Thermal resistance, chip to ambient air	R_{thJA}	≤ 70	K/W
Thermal resistance, junction-soldering point ¹⁾	R_{thJS}	≤ 10	
DIN humidity category, DIN 40 040		E	
IEC climatic category, DIN IEC 68-1		55 / 150 / 56	

1) Transistor on epoxy pcb 40 mm x 40 mm x 1.5 mm with 6 cm² copper area for drain connection

Electrical Characteristics, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

Static Characteristics

Drain-source breakdown voltage $V_{GS} = 0 \text{ V}$, $I_D = 0.25 \text{ mA}$, $T_j = 0^\circ\text{C}$	$V_{(BR)DSS}$	100	-	-	V
Gate threshold voltage $V_{GS} = V_{DS}$, $I_D = 1 \text{ mA}$	$V_{GS(\text{th})}$	0.8	1.4	2	
Zero gate voltage drain current $V_{DS} = 100 \text{ V}$, $V_{GS} = 0 \text{ V}$, $T_j = 25^\circ\text{C}$ $V_{DS} = 100 \text{ V}$, $V_{GS} = 0 \text{ V}$, $T_j = 125^\circ\text{C}$	I_{DSS}	-	0.1	1	μA
		-	10	100	
Gate-source leakage current $V_{GS} = 20 \text{ V}$, $V_{DS} = 0 \text{ V}$	I_{GSS}	-	10	100	nA
Drain-Source on-state resistance $V_{GS} = 5 \text{ V}$, $I_D = 1.7 \text{ A}$	$R_{DS(\text{on})}$	-	0.17	0.31	Ω

Electrical Characteristics, at $T_j = 25^\circ\text{C}$, unless otherwise specified

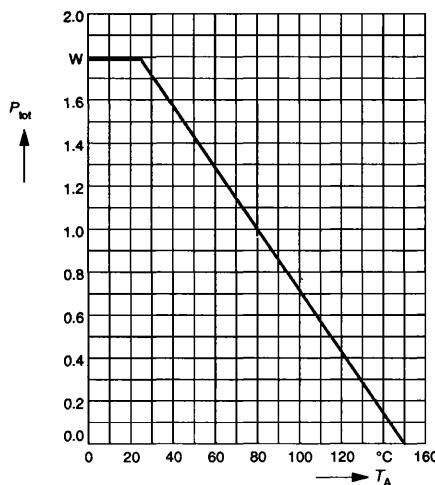
Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)}\text{max}$, $I_D = 1.7 \text{ A}$	g_{fs}	2	4	-	S
Input capacitance $V_{GS} = 0 \text{ V}$, $V_{DS} = 25 \text{ V}$, $f = 1 \text{ MHz}$	C_{iss}	-	470	625	pF
Output capacitance $V_{GS} = 0 \text{ V}$, $V_{DS} = 25 \text{ V}$, $f = 1 \text{ MHz}$	C_{oss}	-	125	190	
Reverse transfer capacitance $V_{GS} = 0 \text{ V}$, $V_{DS} = 25 \text{ V}$, $f = 1 \text{ MHz}$	C_{rss}	-	70	105	
Turn-on delay time $V_{DD} = 30 \text{ V}$, $V_{GS} = 5 \text{ V}$, $I_D = 0.3 \text{ A}$ $R_{GS} = 50 \Omega$	$t_{d(on)}$	-	12	18	ns
Rise time $V_{DD} = 30 \text{ V}$, $V_{GS} = 5 \text{ V}$, $I_D = 0.3 \text{ A}$ $R_{GS} = 50 \Omega$	t_r	-	40	60	
Turn-off delay time $V_{DD} = 30 \text{ V}$, $V_{GS} = 5 \text{ V}$, $I_D = 0.3 \text{ A}$ $R_{GS} = 50 \Omega$	$t_{d(off)}$	-	140	190	
Fall time $V_{DD} = 30 \text{ V}$, $V_{GS} = 5 \text{ V}$, $I_D = 0.3 \text{ A}$ $R_{GS} = 50 \Omega$	t_f	-	65	90	

Electrical Characteristics, at $T_j = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Reverse Diode					
Inverse diode continuous forward current $T_A = 25^\circ\text{C}$	I_S	-	-	1.7	A
Inverse diode direct current,pulsed $T_A = 25^\circ\text{C}$	I_{SM}	-	-	6.8	
Inverse diode forward voltage $V_{GS} = 0 \text{ V}, I_F = 1.7 \text{ A}, T_j = 25^\circ\text{C}$	V_{SD}	-	0.8	1.1	V
Reverse recovery time $V_R = 30 \text{ V}, I_F=I_S, di_F/dt = 100 \text{ A}/\mu\text{s}$	t_{rr}	-	-	-	ns
Reverse recovery charge $V_R = 30 \text{ V}, I_F=I_S, di_F/dt = 100 \text{ A}/\mu\text{s}$	Q_{rr}	-	-	-	μC

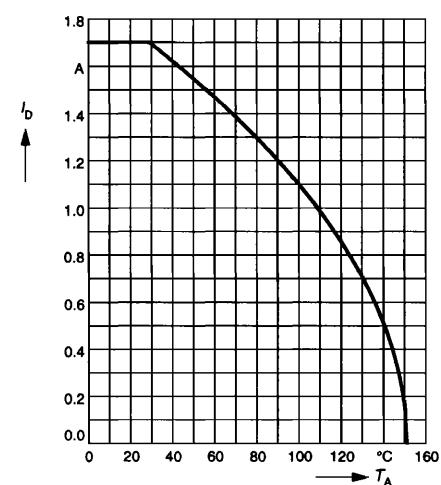
Power dissipation

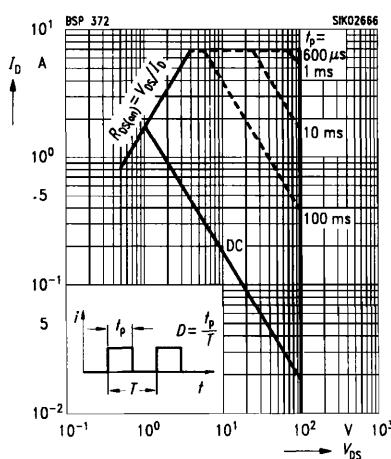
$$P_{\text{tot}} = f(T_A)$$


Safe operating area $I_D = f(V_{DS})$

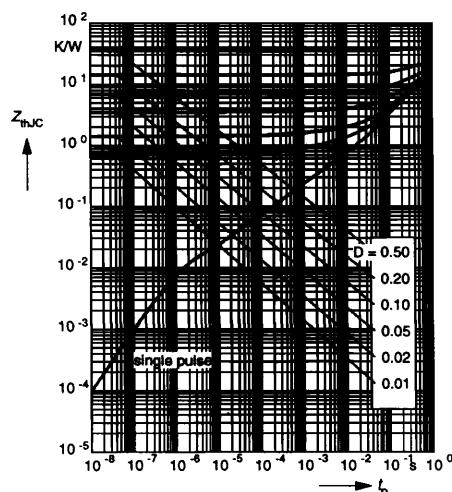
 parameter : $D = 0$, $T_C=25^\circ\text{C}$
Drain current

$$I_D = f(T_A)$$

 parameter: $V_{GS} \geq 5 \text{ V}$

Safe operating area $I_D = f(V_{DS})$

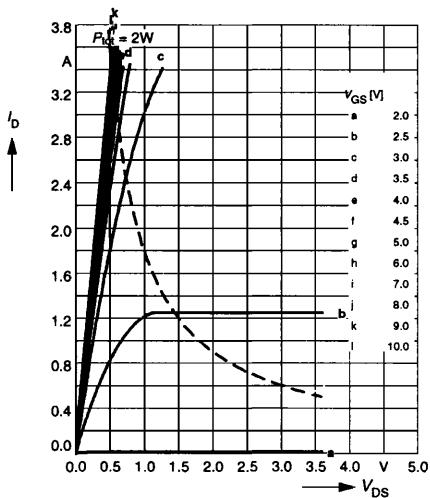
 parameter : $D = 0$, $T_C=25^\circ\text{C}$

Transient thermal impedance

$$Z_{thJA} = f(t_p)$$

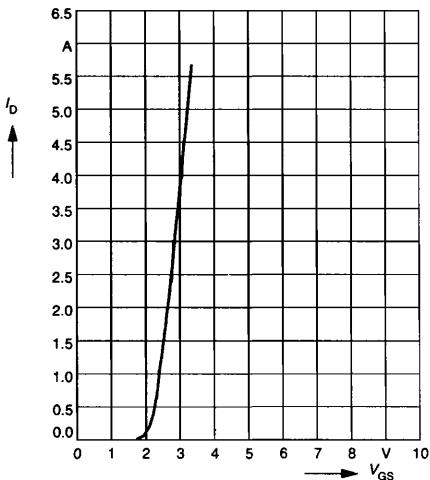
 parameter: $D = t_p / T$


Typ. output characteristics

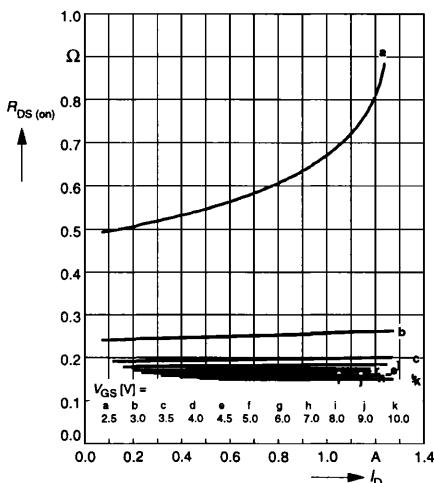
$I_D = f(V_{DS})$
parameter: $t_p = 80 \mu\text{s}$, $T_j = 25^\circ\text{C}$



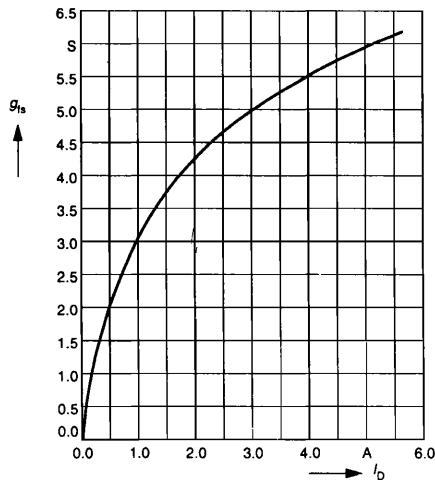
Typ. transfer characteristics $I_D = f(V_{GS})$
parameter: $t_p = 80 \mu\text{s}$


Typ. drain-source on-resistance

$R_{DS(\text{on})} = f(I_D)$
parameter: $t_p = 80 \mu\text{s}$, $T_j = 25^\circ\text{C}$

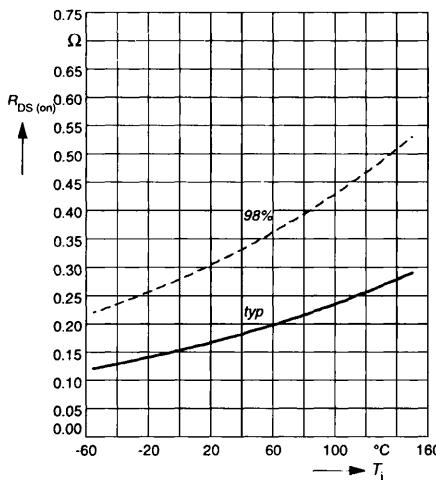


Typ. forward transconductance $g_{fs} = f(I_D)$
parameter: $t_p = 80 \mu\text{s}$,

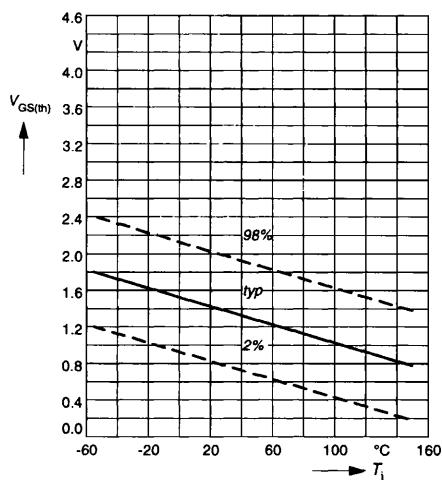


Drain-source on-resistance

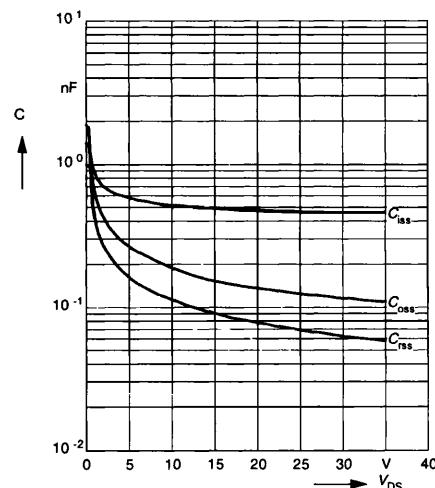
$R_{DS(on)} = f(T_j)$
parameter: $I_D = 1.7 \text{ A}$, $V_{GS} = 5 \text{ V}$


Gate threshold voltage

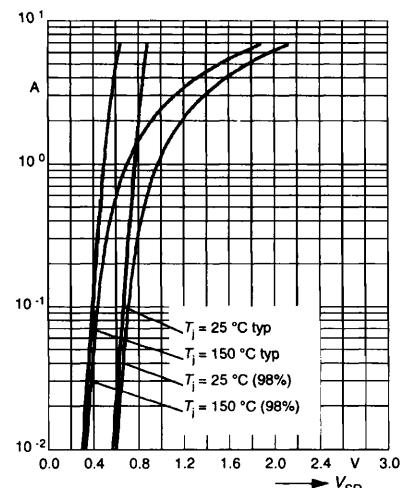
$V_{GS(th)} = f(T_j)$
parameter: $V_{GS} = V_{DS}$, $I_D = 1 \text{ mA}$


Typ. capacitances

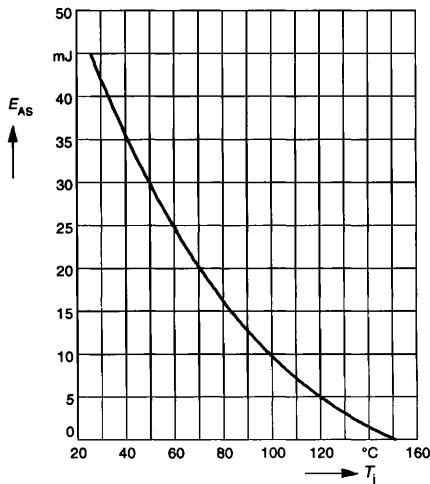
$C = f(V_{DS})$
parameter: $V_{GS}=0\text{V}$, $f = 1 \text{ MHz}$


Forward characteristics of reverse diode

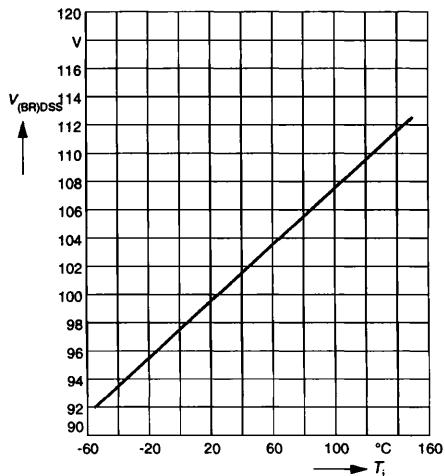
$I_F = f(V_{SD})$
parameter: T_j , $t_p = 80 \mu\text{s}$



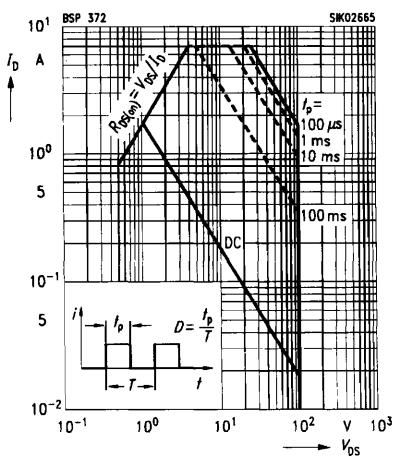
Avalanche energy $E_{AS} = f(T_j)$
 parameter: $I_D = 1.7 \text{ A}$, $V_{DD} = 25 \text{ V}$
 $R_{GS} = 25 \Omega$, $L = 23.3 \text{ mH}$



Drain-source breakdown voltage
 $V_{(BR)DSS} = f(T_j)$



Safe operating area $I_D=f(V_{DS})$
 parameter : $D = 0.01$, $T_C=25^\circ\text{C}$



Package outlines

SOT-223

Dimensions in mm

