


## P-Series Pushbutton Switches



These rugged pushbutton-type switches feature international approvals, ratings to 20A 125VAC and a heavy actuation force (3-5 lbs. typical) which makes this switch ideal for use as a “foot-pedal” switch. These switches have become mainstays for canister Vacuum Cleaner applications. The metal bushing and plunger construction enables this alternate action switch to withstand the rigors of most any stringent pushbutton application.

### Dielectric Strength

*UL/CSA:* 1000 - live to dead metal parts & opposite polarity  
*TUV:* 4000V - live to dead metal parts; 1250V - opposite polarity across open contacts

### Electrical Life


50,000 cycles

### Mechanical Life

100,000 cycles

### Operating Temperature

0°F to 85°F (32°C to 85°C)

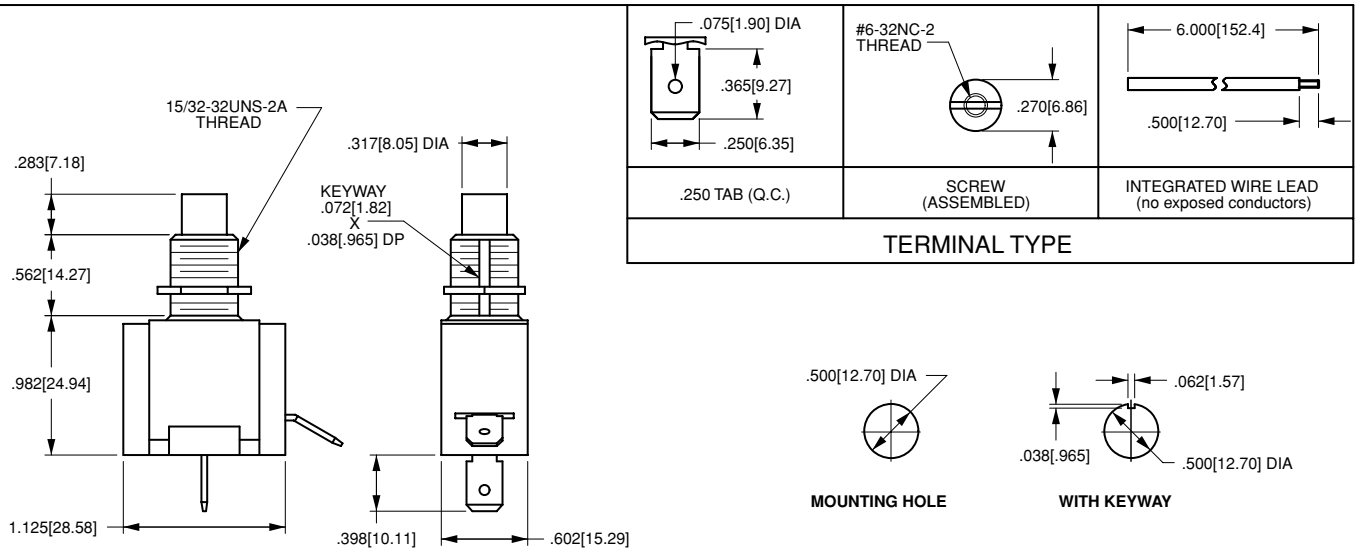

# PA341

<sup>1</sup>  
Part Number

### 1 PART NUMBER: SERIES/ACTUATOR/CIRCUITRY/RATING/TERMINATION

|   | .250 tab | screw terminals | wire leads |
|---|----------|-----------------|------------|
| <b>10A 250VAC, 15A 125VAC, 3/4 HP 120-240 VAC<sup>1</sup></b>   |          |                 |            |
| ON-OFF  | PA341    | PA344           | PA345      |
| ON-ON   | PB341    | PB344           | PBA345     |
| <b>10A 250VAC, 20A 125VAC, 1 1/2 HP 120-240 VAC<sup>1</sup></b> |          |                 |            |
| ON-OFF  | PA301    | PA304           | PA305      |
| ON-ON   | PB301    | PB304           | PB305      |
| <b>10A 250VAC, 15A 125VAC, 10(6)a 250 VACu, T85<sup>2</sup></b> |          |                 |            |
| ON-OFF  | PA951    | PA954           | PA955      |

### NOTES

- Additional ratings available. Consult factory.
- UL, CSA & TUV approved.