THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	M2	REVISED PER ECO-11-004917	11MAR11	RK	HMR

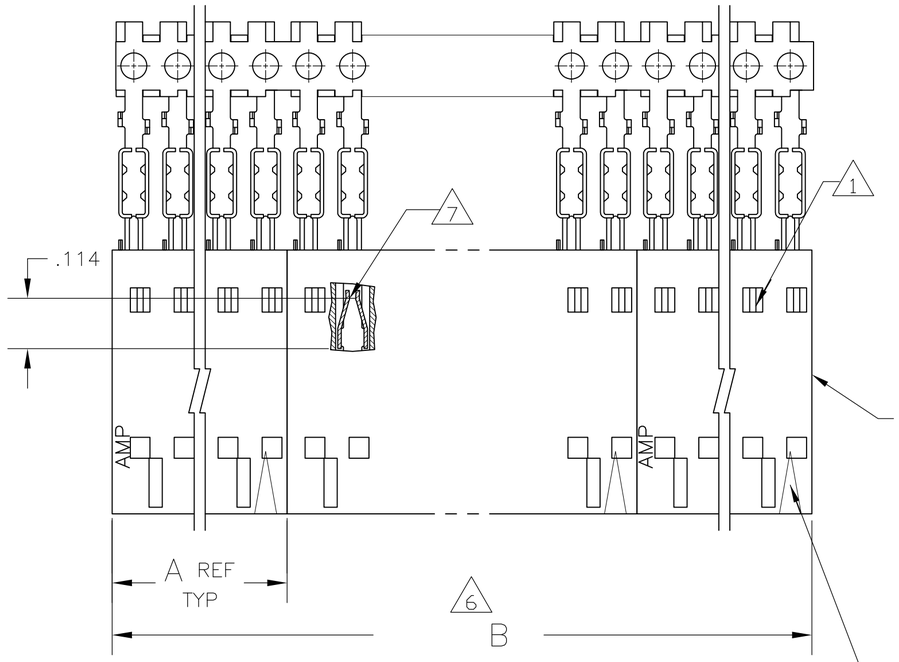

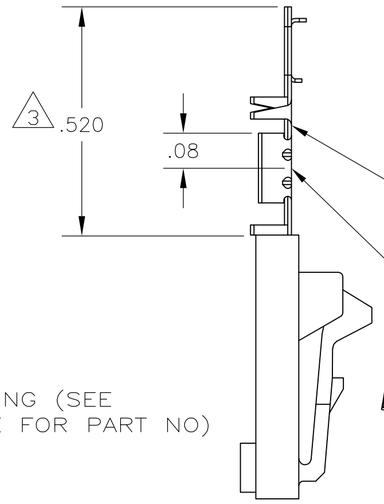

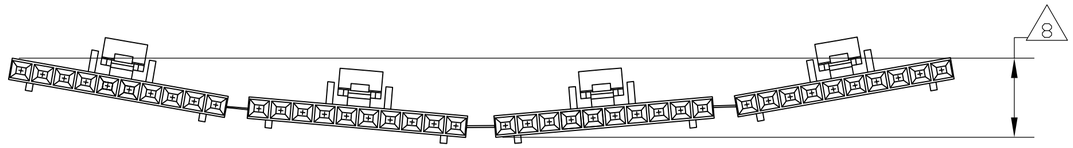

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

13	12	2	2.40	1.198	1-104257-1	12	6-103959-1
13	12	2	2.20	1.098	1-104257-0	11	6-103959-0
	12	2	2.00	.998	104257-9	10	5-103959-9
	12	2	1.80	.898	104257-8	9	5-103959-8
	12	2	1.60	.798	104257-7	8	5-103959-7
13	12	2	1.40	.698	104257-6	7	5-103959-6
	12	4	2.39	.598	104257-5	6	5-103959-5
	12	4	1.99	.498	104257-4	5	5-103959-4
	12	5	1.99	.398	104257-3	4	5-103959-3
	12	8	2.40	.298	104257-2	3	5-103959-2
	12	10	2.00	.198	104257-1	2	5-103959-1
	10	5	1.99	.398	104257-3	4	1-103959-3
11	10	4	1.99	.498	104257-4	5	1-103959-2
13	9	2	2.40	1.198	1-104257-1	12	1-103959-1
13	9	2	2.20	1.098	1-104257-0	11	1-103959-0
	9	2	2.00	.998	104257-9	10	103959-9
13	9	2	1.80	.898	104257-8	9	103959-8
	9	2	1.60	.798	104257-7	8	103959-7
13	9	2	1.40	.698	104257-6	7	103959-6
	9	4	2.39	.598	104257-5	6	103959-5
	9	4	1.99	.498	104257-4	5	103959-4
	9	5	1.99	.398	104257-3	4	103959-3
	9	8	2.40	.298	104257-2	3	103959-2
	9	10	2.00	.198	104257-1	2	103959-1
PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	

13 SUPERSEDED

1. CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
2. USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
3. THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
4. POINT OF MEASUREMENT FOR PLATING THICKNESS
5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103641
6. ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
7. POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
8. MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED.055.
9. .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
10. .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
11. PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
12. .000100-.000200 MATTE TIN OVER .000050 NICKEL.
13. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± .005
4 PLC ± -
ANGLES ± -

MATERIAL: HOUSING:

FINISH: SEE TABLE

DWN	L A MAYER	11-4-86
CHK	P de Jong	11-12-86
APVD	P de Jong	11-12-86
PRODUCT SPEC	108-25034	
APPLICATION SPEC	114-25026	
WEIGHT	-	

TE Connectivity

NAME: RCPT ASSY, AMPMODU MTE, SINGLE ROW .100 C/L, LATCHED AND POLARIZED FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-103959	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV M2

103959