


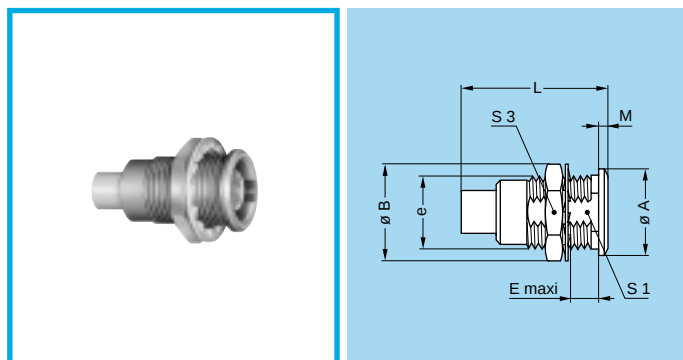


EGN Fixed socket, nut fixing, with keys (code N, P or S)

Reference		Dimensions (mm)							
Model	Series	A	B	e	E	L	M	S1	S3
EGN	0F	10	12.5	M9x0.6	7	19	1.2	8.2	11
EGN	1F	14	16.0	M12x1.0	7	19	1.5	10.5	14
EGN	2F	18	19.5	M15x1.0	6	19	1.8	13.5	17
EGN	3F	22	25.2	M18x1.0	5	19	2.0	16.5	22

P1 Panel cut-out

Note: EGN in 4F and 5F series are available on request.

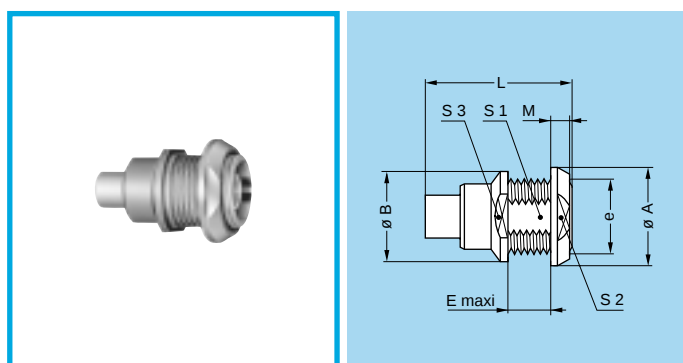


EEN Fixed socket, nut fixing, with keys (code N, P or S), (back panel mounting)

Reference		Dimensions (mm)							
Model	Series	A	B	e	E	L	M	S1	S2
EEN	0F	13	12	M10x0.75	6.0	19	2.5	9.0	10.5
EEN	1F	17	15	M13x0.75	6.2	19	3.2	11.5	14
EEN	2F	20	19	M16x1.00	6.4	19	4.0	14.5	17
EEN	3F	22	22	M18x1.00	6.4	19	4.0	16.5	19

P1 Panel cut-out

Note: EEN in 4F and 5F series are available on request.

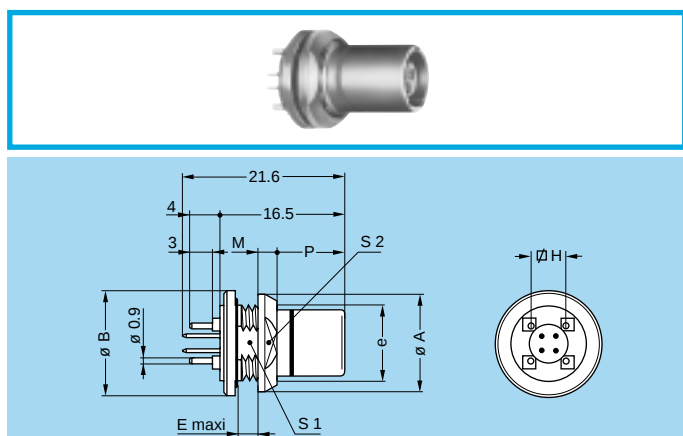

EHN Fixed socket, nut fixing, with keys (code N, P, S, W or X), for PCB (back panel mounting)


Reference		Dimensions (mm)							
Model	Series	A	B	e	E	H	M	P	S1
EHN	0F	13	14	M10x0.75	3	5.08	2.5	9.0	9.0
EHN	1F	17	17	M13x0.75	3	7.62	3.2	8.3	11.5
EHN	2F	20	20	M16x1.00	3	8.89	4.0	7.5	14.5
EHN	3F	22	23	M18x1.00	3	11.43	4.0	7.5	16.5
EHW	4F	29	29	M24x1.00	3	15.24	5.0	6.5	22.0
EHW	5F	38	38	M33x1.00	3	20.32	5.0	6.5	31.0

P1 Panel cut-out

P3 PCB drilling layout

Watertight model

The HEN fixed socket allow the device on which they are fitted to reach a protection index of IP 66 as per IEC 529 (unmated). They are fully compatible with all non-watertight models of the same series.

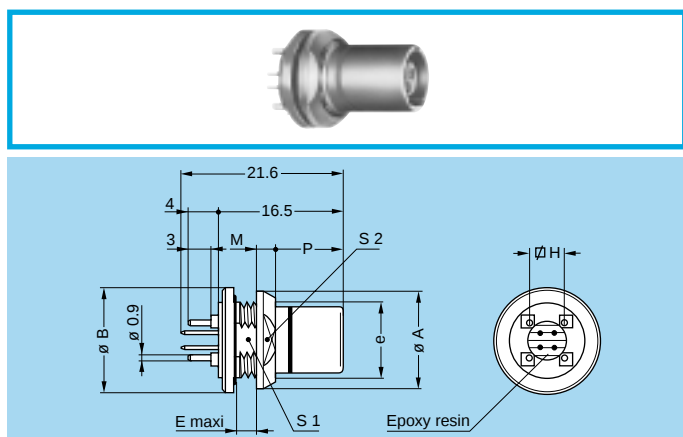

HEN Fixed socket, nut fixing, with keys (code N, P, S, W or X), for PCB (back panel mounting), IP 66

Reference		Dimensions (mm)							
Model	Series	A	B	e	E	H	M	P	S1
HEN	0F	13	14	M10x0.75	3	5.08	2.5	9.0	9.0
HEN	1F	17	17	M13x0.75	3	7.62	3.2	8.3	11.5
HEN	2F	20	20	M16x1.00	3	8.89	4.0	7.5	14.5
HEN	3F	22	23	M18x1.00	3	11.43	4.0	7.5	16.5
HEW	4F	29	29	M24x1.00	3	15.24	5.0	6.5	22.0
HEW	5F	38	38	M33x1.00	3	20.32	5.0	6.5	31.0

P1 Panel cut-out

P3 PCB drilling layout