

54ACT11353, 74ACT11353

DUAL 1-OF-4 DATA SELECTORS/MULTIPLEXERS

WITH 3-STATE OUTPUTS

TI0121—D3109, JUNE 1988—REVISED MARCH 1990

T-666-21-51

- Inputs are TTL-Voltage Compatible
- Inverting Versions of 54ACT11253 and 74ACT11253
- Permits Multiplexing from N Lines to 1 Line
- Performs Parallel-to-Serial Conversion
- Flow-Through Architecture to Optimize PCB Layout
- Center-Pin VCC and GND Configurations to Minimize High-Speed Switching Noise
- EPIC™ (Enhanced-Performance Implanted CMOS) 1-μm Process
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs


description

Each of these data selectors/multiplexers contains inverters and drivers to supply full binary decoding data selection to the AND-OR gates. Separate output control inputs ($\overline{G}$) are provided for each of the two four-line sections.


The three-state outputs can interface with and drive data lines of bus-organized systems. With all but one of the common outputs disabled (at a high-impedance state), the low-impedance of the single enabled output will drive the bus line to a high or low logic level. Each output has its own strobe ($\overline{G}$). The output is disabled when its strobe is high.

The 54ACT11353 is characterized for operation over the full military temperature range of -55°C to 125°C . The 74ACT11353 is characterized for operation from -40°C to 85°C .

54ACT11353 ... J PACKAGE
74ACT11353 ... D OR N PACKAGE
(TOP VIEW)



54ACT11353 ... FK PACKAGE
(TOP VIEW)



FUNCTION TABLE

SELECT INPUTS		DATA INPUTS				STROBE	OUTPUT
B	A	C0	C1	C2	C3	$\overline{G}$	Y
X	X	X	X	X	X	H	Z
L	L	L	X	X	X	L	H
L	L	H	X	X	X	L	L
L	H	X	L	X	X	L	H
L	H	X	H	X	X	L	L
H	L	X	X	L	X	L	H
H	L	X	X	H	X	L	L
H	H	X	X	X	L	L	H
H	H	X	X	X	H	L	L

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1990, Texas Instruments Incorporated



54ACT11353, 74ACT11353


DUAL 1-OF-4 DATA SELECTORS/MULTIPLEXERS

WITH 3-STATE OUTPUTS

TI0121—D3109, JUNE 1988—REVISED MARCH 1990


logic symbol†

T-66-21-51

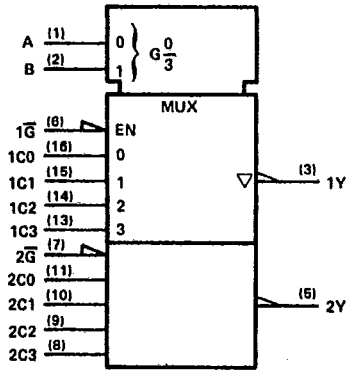

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

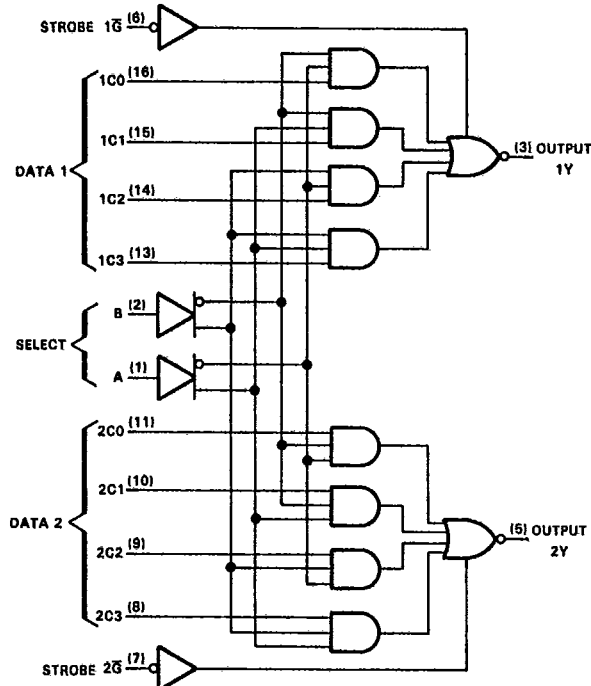

Pin numbers shown are for D, J, and N packages.

54ACT11353, 74ACT11353
DUAL 1-OF-4 DATA SELECTORS/MULTIPLEXERS
WITH 3-STATE OUTPUTS

T-66-21-51

D3109, JUNE 1988—REVISED MARCH 1990—TII0121

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC}	-0.5 V to 7 V
Input voltage range, V_I (see Note 1)	-0.5 V to $V_{CC} + 0.5$ V
Output voltage range, V_O (see Note 1)	-0.5 V to $V_{CC} + 0.5$ V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	± 20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	± 50 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	± 50 mA
Continuous current through V_{CC} or GND pins	± 100 mA
Storage temperature range	-65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

recommended operating conditions

	54ACT11353		74ACT11353		UNIT
	MIN	MAX	MIN	MAX	
V_{CC} Supply voltage	4.5	5.5	4.5	5.5	V
V_{IH} High-level input voltage	2		2		V
V_{IL} Low-level input voltage		0.8		0.8	V
V_I Input voltage	0	V_{CC}	0	V_{CC}	V
V_O Output voltage	0	V_{CC}	0	V_{CC}	V
I_{OH} High-level output current		-24		-24	mA
I_{OL} Low-level output current		24		24	mA
$\Delta t/\Delta v$ Input transition rise or fall rate	0	10	0	10	ns/V
T_A Operating free-air temperature	-55	125	-40	85	°C

54ACT11353, 74ACT11353
DUAL 1-OF-4 DATA SELECTORS/MULTIPLEXERS
WITH 3-STATE OUTPUTS

T-66-21-51

T10121—D3109, JUNE 1988—REVISED MARCH 1990

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	T _A = 25°C			54ACT11353		74ACT11353		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V _{OH}	I _{OH} = -50 μA	4.5 V	4.4			4.4		4.4		V
		5.5 V	5.4			5.4		5.4		
	I _{OH} = -24 mA	4.5 V	3.94			3.7		3.8		
		5.5 V	4.94			4.7		4.8		
	I _{OH} = -50 mA†	5.5 V				3.85				
V _{OL}	I _{OL} = 50 μA	4.5 V			0.1		0.1		0.1	V
		5.5 V			0.1		0.1		0.1	
	I _{OL} = 24 mA	4.5 V			0.36		0.5		0.44	
		5.5 V			0.36		0.5		0.44	
	I _{OL} = 50 mA†	5.5 V				1.65				
I _{OZ}	V _O = V _{CC} or GND	5.5 V			±0.5		±10		±5	μA
		5.5 V			±0.1		±1		±1	
I _I	V _I = V _{CC} or GND	5.5 V			±0.1		±1		±1	μA
I _{CC}	V _I = V _{CC} or GND, I _O = 0	5.5 V			8		160		80	μA
ΔI _{CC} ‡	One input at 3.4 V, Other inputs at GND or V _{CC}	5.5 V			0.9		1		1	mA
C _i	V _I = V _{CC} or GND	5 V			3.5					pF
C _o	V _O = V _{CC} or GND	5 V			8					pF

† Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

‡ This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V_{CC}.

switching characteristics over recommended operating free-air temperature range,
V_{CC} = 5 V ± 0.5 V, (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	T _A = 25°C			54ACT11353		74ACT11353		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{PLH}	A or B	Any Y	1.5	6.6	11.1	1.5	13.8	1.5	12.7	ns
t _{PHL}			1.5	5.9	8.3	1.5	10.1	1.5	9.4	
t _{PLH}	Data (Any C)	Any Y	1.5	6.3	9.8	1.5	12.3	1.5	11	ns
t _{PHL}			1.5	5.3	7.2	1.5	10.5	1.5	8	
t _{PZH}	0	Any Y	1.5	4.3	6.8	1.5	7.9	1.5	7.4	ns
t _{PZL}			1.5	4.2	6.7	1.5	7.8	1.5	7.4	
t _{PHZ}	0	Any Y	1.5	6.1	7.8	1.5	8.6	1.5	8.2	ns
t _{PLZ}			1.5	5.4	6.9	1.5	7.6	1.5	7.3	

operating characteristics, V_{CC} = 5 V, T_A = 25°C




PARAMETER			TEST CONDITIONS		TYP	UNIT
C _{pd}	Power dissipation capacitance per multiplexer	Outputs enabled	C _L = 50 pF, f = 1 MHz		39	pF
		Outputs disabled			19	

54ACT11353, 74ACT11353
DUAL 1-OF-4 DATA SELECTORS/MULTIPLEXERS
WITH 3-STATE OUTPUTS

D3109, JUNE 1988—REVISED MARCH 1990—TI0121

T-66-21-51

PARAMETER MEASUREMENT INFORMATION

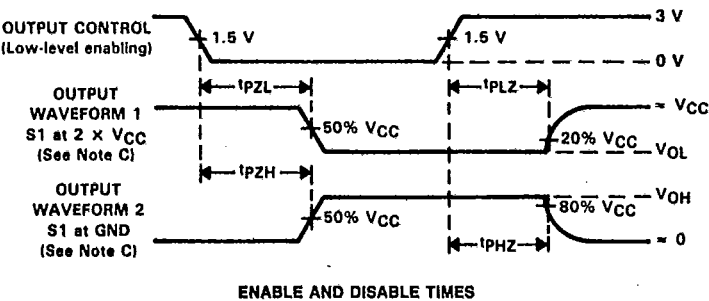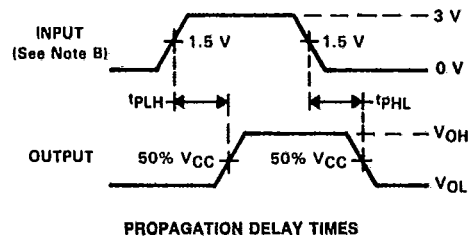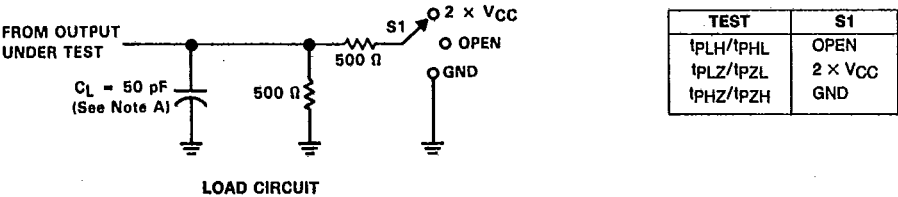

- NOTES: A. C_L includes probe and jig capacitance.
B. Input pulses are supplied by generators having the following characteristics: PRR $\leq 10 \text{ MHz}$, $Z_0 = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.
Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
D. The outputs are measured one at a time with one input transition per measurement.

FIGURE 1. LOAD CIRCUIT AND VOLTAGE WAVEFORMS