



GS1000FL-AU~GS1010FL-AU

SURFACE GENERAL PURPOSE RECTIFIERS

VOLTAGE 50 to 1000 Volts **CURRENT** 1.0 Amperes

SOD-123FL



Unit: inch (mm)

FEATURES

- For surface mounted applications
- Low profile package
- Ideal for automated placement
- High temperature soldering : 260°C /10 seconds at terminals
- Glass Passivated Chip Junction
- Acquire quality system certificate : TS16949
- AEC-Q101 qualified
- Green molding compound as per IEC61249 Std. . (Halogen Free)
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SOD-123FL,Molded plastic over passivated junction
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0006 ounces, 0.0173 grams
- Standard Packaging : 8mm tape (EIA-481)
- Polarity : Color band cathode

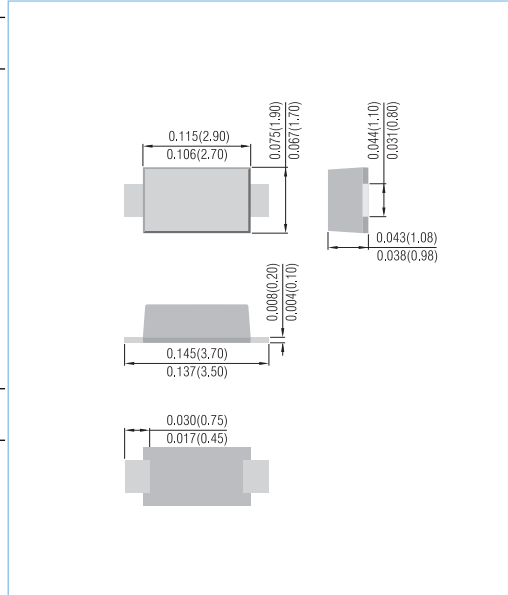

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| PARAMETER | SYMBOL | GS1000FL-AU | GS1001FL-AU | GS1002FL-AU | GS1004FL-AU | GS1006FL-AU | GS1008FL-AU | GS1010FL-AU | UNITS |
|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------|
| Marking Code | | 1A | 1B | 1D | 1G | 1J | 1K | 1M | |
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Current (Note 1) | $I_{F(AV)}$ | 1.0 | | | | | | | A |
| Peak one cycle surge forward current (non-repetitive) | I_{FSM} | 30 (60Hz) | | | | | | | A |
| Maximum Forward Voltage at 1.0A | V_F | 1.1 | | | | | | | V |
| Maximum DC Reverse Current at $T_A=25^\circ\text{C}$ Rated DC Blocking Voltage $T_A=125^\circ\text{C}$ | I_R | 1 50 | | | | | | | μA |
| Typical Junction capacitance at 4V, MHz | C_J | 4 | | | | | | | pF |

ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| PARAMETER | SYMBOL | GS1000FL-AU | GS1001FL-AU | GS1002FL-AU | GS1004FL-AU | GS1006FL-AU | GS1008FL-AU | GS1010FL-AU | UNITS |
|---|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-----------------------------|
| Typical thermal resistance (Note 2) | $R_{\theta JA}$ | 65 | | | | | | | $^\circ\text{C} / \text{W}$ |
| Operating and Storage Temperature Range | T_J, T_{STG} | -50 TO +150 | | | | | | | $^\circ\text{C}$ |

NOTES:

- 1.Pulse test: 300u pulse width, 1% duty cycle.
- 2.Soldering land: 6mm x 6mm



GS1000FL-AU~GS1010FL-AU

RATING AND CHARACTERISTIC CURVES

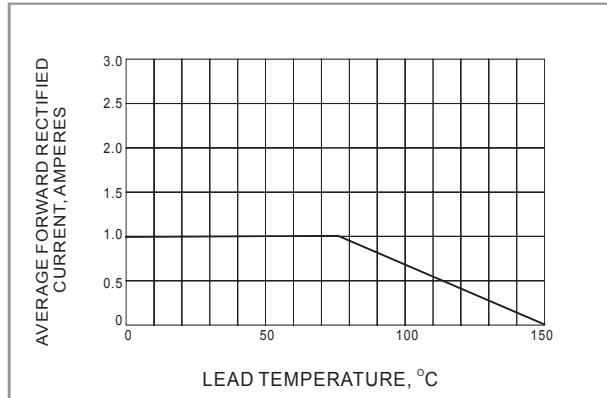


Fig.1 FORWARD CURRENT DERATING CURVE

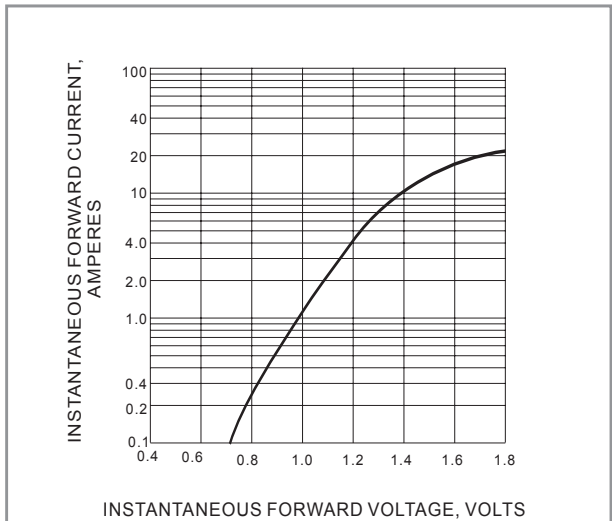


Fig.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

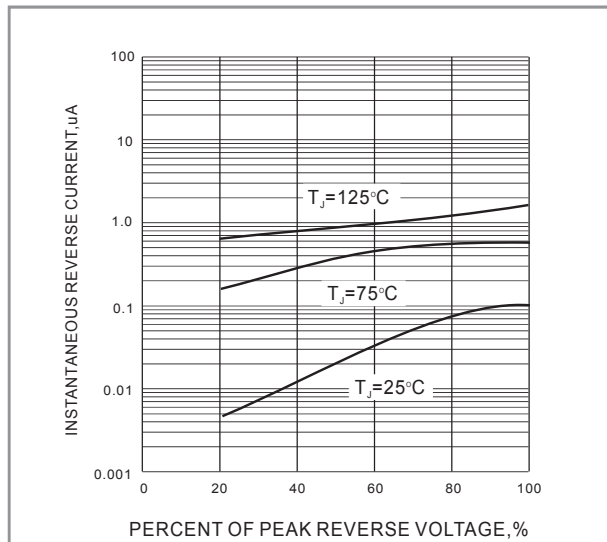


Fig.3 TYPICAL REVERSE CHARACTERISTICS

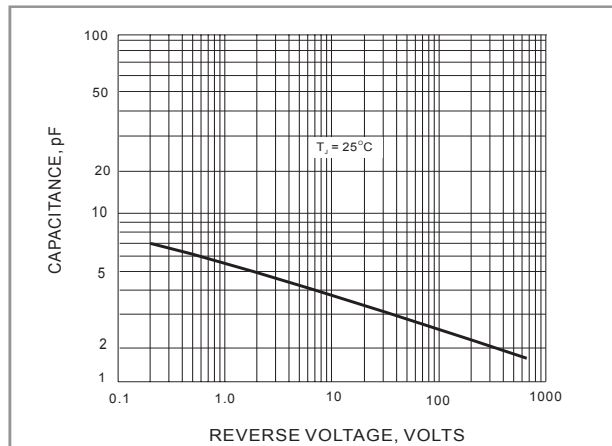


Fig.4 TYPICAL JUNCTION CAPACITANCE


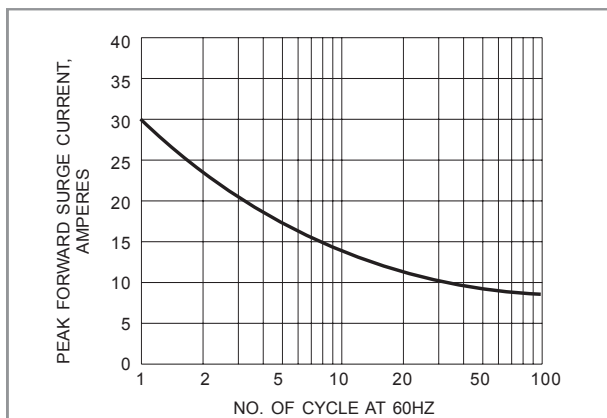


Fig.5- MAXIMUM NON - REPETITIVE SURGE CURRENT



GS1000FL-AU~GS1010FL-AU

MOUNTING PAD LAYOUT

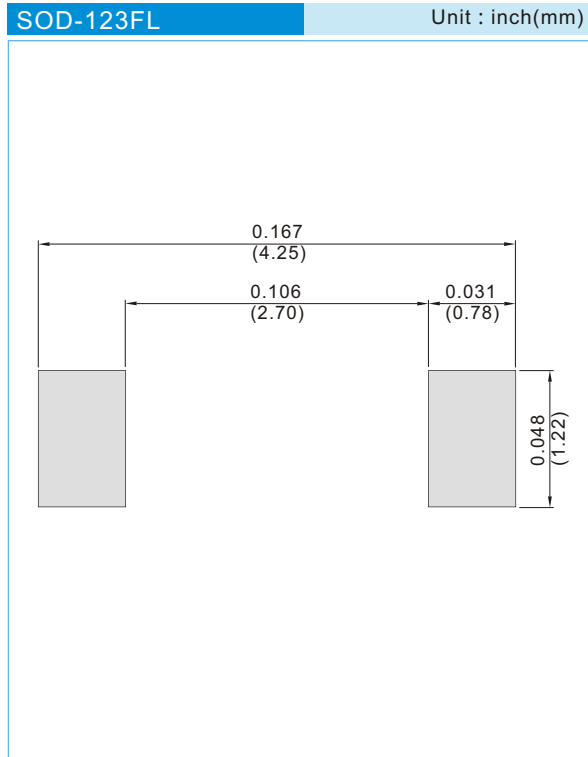

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel



GS1000FL-AU~GS1010FL-AU


Part No_packing code_Version

GS1000FL-AU_R1_000A1

GS1000FL-AU_R2_000A1

For example :

RB500V-40_R2_00001

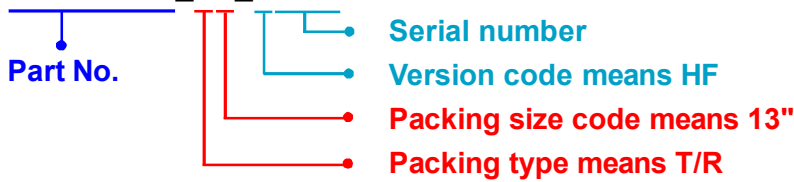

| Packing Code XX | | | | Version Code XXXXX | | |
|--------------------------------------|----------------------|----------------------------------|----------------------|---------------------------|----------------------|---------------------------------------|
| Packing type | 1 st Code | Packing size code | 2 nd Code | HF or RoHS | 1 st Code | 2 nd ~5 th Code |
| Tape and Ammunition Box (T/B) | A | N/A | 0 | HF | 0 | serial number |
| Tape and Reel (T/R) | R | 7" | 1 | RoHS | 1 | serial number |
| Bulk Packing (B/P) | B | 13" | 2 | | | |
| Tube Packing (T/P) | T | 26mm | X | | | |
| Tape and Reel (Right Oriented) (TRR) | S | 52mm | Y | | | |
| Tape and Reel (Left Oriented) (TRL) | L | PANASERT T/B CATHODE UP (PBCU) | U | | | |
| FORMING | F | PANASERT T/B CATHODE DOWN (PBCD) | D | | | |



GS1000FL-AU~GS1010FL-AU

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.