



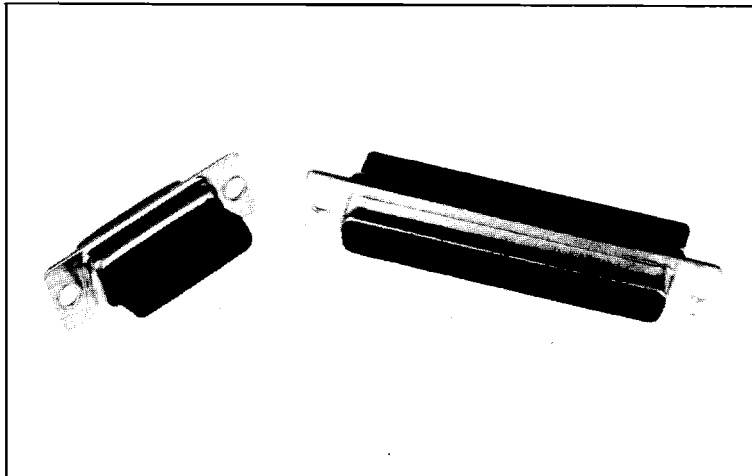


- Reliable crimp snap-in contacts feature insulation grip for increased holding power.
- Nylon insulator has minimum contact retention of 10 lbs.
- Connector shells available with bright tin finish for EMI/RFI shielding.
- Contacts compatible with industry standard crimp tools
- Contact current rating: 5 amps

Materials


Shell - Steel, zinc plated, with yellow chromate or bright tin over nickel
 Insulator - Glass-filled thermoplastic, U/L rated 94V-0
 Operating Temperature - 55°C to +105°C

CONNECTOR SIZE	MALE and FEMALE			MALE		FEMALE	
	A	B	C	E	F	E	F
9	1.213 30.81	.984 24.99	.494 12.55	.035 0.88	.235 5.97	.035 0.88	.243 6.17
15	1.541 39.14	1.312 33.32	.494 12.55	.035 0.88	.235 5.97	.035 0.88	.243 6.17
25	2.088 53.04	1.852 47.04	.494 12.55	.039 .099	.230 5.84	.035 0.88	.243 6.17
37	2.735 69.47	2.500 63.50	.494 12.55	.039 .099	.230 5.84	.035 .088	.243 6.17
50	2.635 66.93	2.406 61.11	.605 15.37	.039 .099	.230 5.84	.035 0.88	.243 6.17



SHELL PLATING

Blank - Yellow chromate
 T - Tin Plate (Male has grounding indents.)

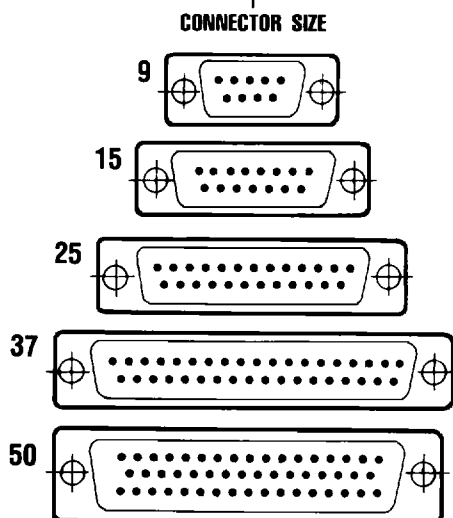

T 25 P 7

SERIES
 Designates Crimp Connector Series

Plug Or Socket

P - Connector body for male pins
 S - Connector body for female pins

SEE PAGE 4 FOR
 CONTACTS WHICH MUST
 BE PURCHASED SEPARATELY
 FOR CONNECTORS SHOWN
 ON THIS PAGE.