



- Series 614 & 605 PGA Carrier sockets offer 4 receptacle styles.
- Many combinations of receptacles and clips to cover all applications.
- Hi-Temp PCT polyester insulator material suitable for all forms of soldering.

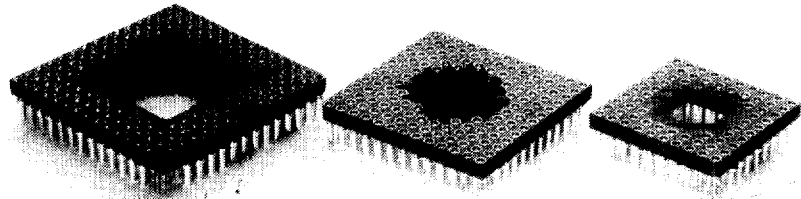

LOW PROFILE


SERIES 614...001, 002, 003

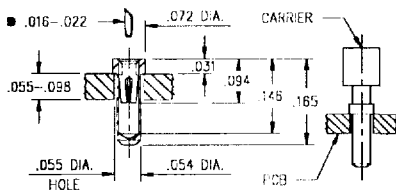

PLATING OPTIONS: 13,93


MINIATURE

SERIES 614...007

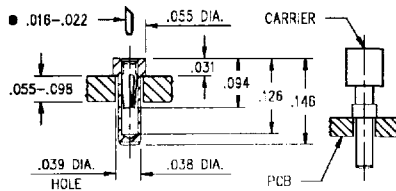


PLATING OPTIONS: 13,93

LOWEST PROFILE
SERIES 614...012

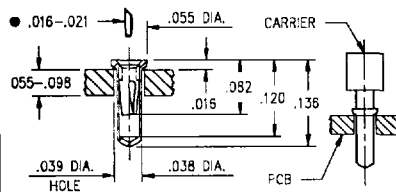

PLATING OPTIONS: 93,99


REDUCED BARREL
SERIES 605...048

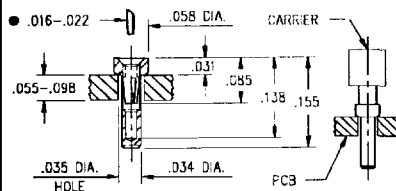

PLATING OPTIONS: 93,99

Ordering Information


1. Select receptacle type at left in combination with receptacle chart below to determine series prefix & suffix numbers.
2. Specify 2-digit plating code from chart at bottom of page.
3. Locate footprint pattern from pages 44 to 48, the middle 8 digits of the part number will be located under the pattern.

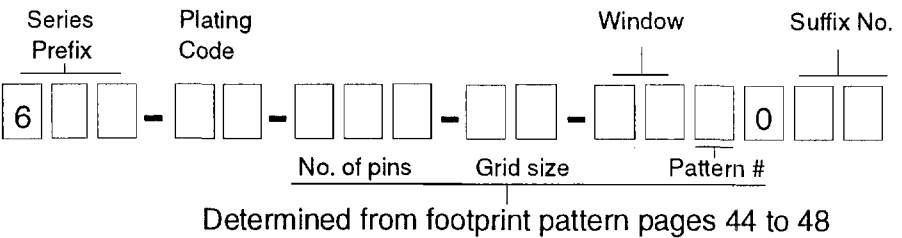

EXAMPLE OF COMPLETE PART NUMBER :

614-93-068-11-061001

This is a 68 pin (11x11 grid) carrier socket with a .6" square window and fitted with low profile receptacles. Pins are tin plated, inner contacts are Mill-Max #32 and are plated 30 μ" gold.



Suffix	Receptacle / Clip Chart
01	Mill-Max #32 clip, standard low force, recommended for devices with less than 150 pins. See page 151 for details.
02	Mill-Max #35 clip, ultra low force, recommended for devices with more than 150 pins, but with less than 250 pins. See page 151 for details.
03	Mill-Max #43 clip, ultra lite force, recommended for devices with more than 250 pins. See page 151 for details.
07	Mill-Max #21 clip, standard low force. See page 149 for details.
12	Mill-Max #21 clip, standard low force. See page 149 for details.
48	Mill-Max #21 clip, standard low force. See page 149 for details.

SPECIFY PLATING CODE XX =	13	93	99
Sleeve (Pin)	10 μ" Au	200 μ" Sn	200 μ" Sn
Contact (Clip)	30 μ" Au	30 μ" Au	200 μ" Sn