



| DATE     | SYM | REVISION RECORD | AUTH. | DR. | CK. |
|----------|-----|-----------------|-------|-----|-----|
| 10/19/00 | -   | ISSUED          |       | NT  | DG  |
|          |     |                 |       |     |     |
|          |     |                 |       |     |     |
|          |     |                 |       |     |     |
|          |     |                 |       |     |     |

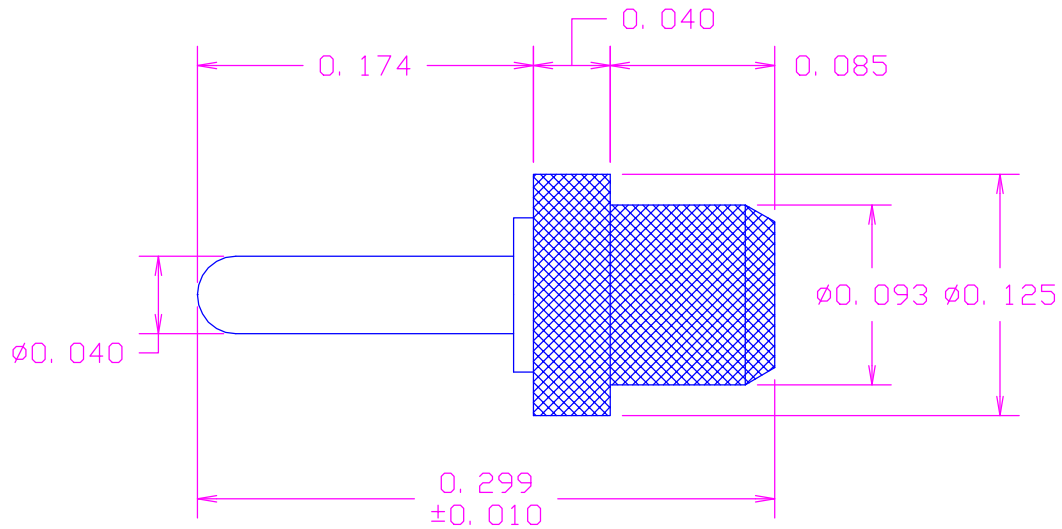

RECOMMENDED HOLE SIZE  
FOR PRESS FIT INSERTION

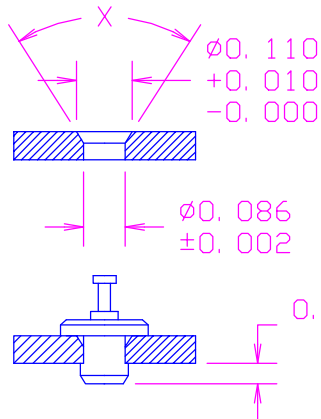

MATERIAL: PIN- BRASS PER ASTM B16,  
ALLOY C 36000, 1/2 HARD

BUSHING- PTFE PER ASTM D1710

COLOR(XX)-SEE COLOR CODE

FINISH: PIN- .0003"MIN. ELECTRO-SOLDER

PER MIL-P-81728, OVER .0001"MIN. COPPER

(XX)COLOR CODE:  
10-BLACK  
11-BROWN  
12-RED  
13-ORANGE  
14-YELLOW  
15-GREEN  
16-BLUE  
17-VIOLET  
18-GRAY  
19-WHITE(NATURAL)

FOR BOARD THICKNESS GREATER THAN .040, X=60°

FOR BOARD THICKNESS LESS THAN .040, X=80°

ACTUAL SIZE



|                                 |                               |                             |                                            |
|---------------------------------|-------------------------------|-----------------------------|--------------------------------------------|
| TOLERANCES<br>(EXCEPT AS NOTED) | CONCORD                       |                             | ELECTRONICS<br>CORPORATION                 |
| DECIMAL<br>+<br>- .005          | P/N                           | SCALE                       | 30 GREAT JONES ST.<br>NEW YORK N. Y. 10012 |
| FRACTIONAL<br>+<br>- 1/64       | TITLE PTFE INSULATED TERMINAL |                             |                                            |
| ANGULAR<br>+<br>- 5°            | DATE<br>10/19/00              | DRAWING NUMBER 1100-06-05XX |                                            |