



A/D ELECTRONICS, INC.




ADS-035-C (5P 180°)

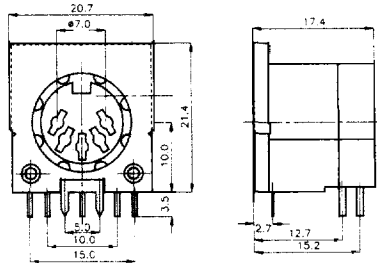


5P DIN SOCKET WITH SHIELD: AND COVER:

Insulation Resistance: 100M Ω at 500 V.D.C.
Dielectric Strength: 1,000V A.C./1 Minute
Contact Resistance: 20m Ω Maximum.
Rating: 100V A.C. 2A




ADS-036 (6P 240°)

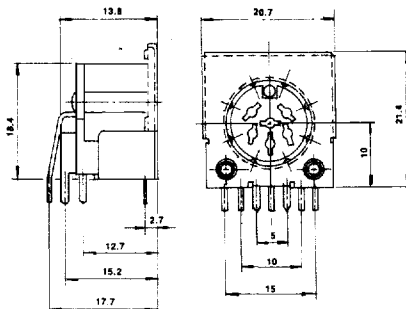


6P DIN SOCKET WITH SHIELD:

Insulation Resistance: 100M Ω at 500 V.D.C.
Dielectric Strength: 1,000V A.C./1 Minute
Contact Resistance: 20m Ω Maximum.
Rating: 100V A.C. 2A




ADS-037 (7P 270°)

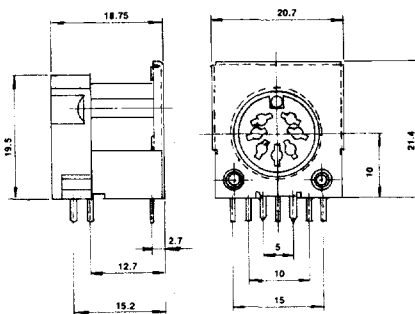


7P DIN SOCKET WITH SHIELD:

Insulation Resistance: 100M Ω at 500 V.D.C.
Dielectric Strength: 1,000V A.C./1 Minute
Contact Resistance: 20m Ω Maximum.
Rating: 100V A.C. 2A



ADS-038 (8P 270°)

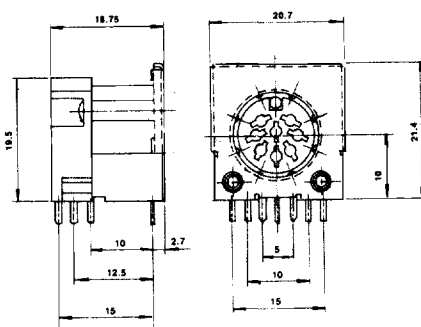

8P DIN SOCKET WITH SHIELD:

Insulation Resistance: 100M Ω at 500 V.D.C.
Dielectric Strength: 1,000V A.C./1 Minute
Contact Resistance: 20m Ω Maximum.
Rating: 100V A.C. 2A