


RoHS

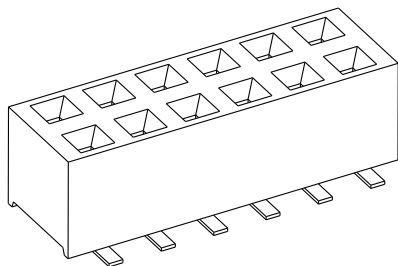

K200SS2X Series

2.0MM PCB Socket SMD Double Row

Features

- Dual row Surface mount Socket
- 0.079" spacing for real estate savings
- Multiple stack height options
- Circuit sizes range from 4-80

Performance Specifications

Material and Finish

Housing :High Temp plastic (UL94V-0)

Contact : Phosphor Bronze

Plated : Gold Plated

Electrical Characteristics

Current Rating : 2.0A AC/DC



Voltage Rating : 250V AC/DC

Resistance : 20m ohm.max.

Insulation Resistance : 1000M ohm.Min.

Withstanding Voltage : 500V AC for one minute

Operating Temperature Range : -40°C to +105°C

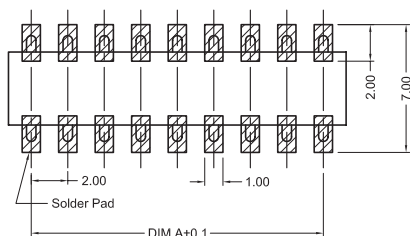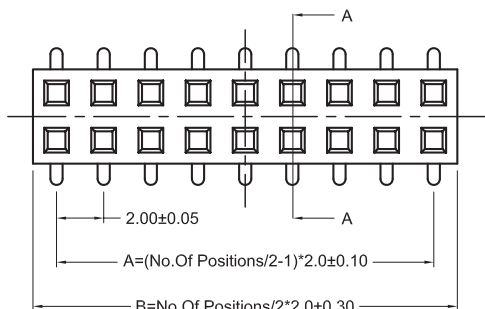

Recommended PCB Layout


2.0MM PCB Socket SMD Double Row

K200SS2X Series

Documentation & Ordering Information

Kycon Part

Part Number Builder




Series

K200SS2X - 2.0MM PCB Socket Double Row SMD Type

Number of Contacts

	A	B		A	B
04	2.00	4.00	44	42.00	44.00
06	4.00	6.00	46	44.00	46.00
08	6.00	8.00	48	46.00	48.00
10	8.00	10.00	50	48.00	50.00
12	10.00	12.00	52	50.00	52.00
14	12.00	14.00	54	52.00	54.00
16	14.00	16.00	56	54.00	56.00
18	16.00	18.00	58	56.00	58.00
20	18.00	20.00	60	58.00	60.00
22	20.00	22.00	62	60.00	62.00
24	22.00	24.00	64	62.00	64.00
26	24.00	26.00	66	64.00	66.00
28	26.00	28.00	68	66.00	68.00
30	28.00	30.00	70	68.00	70.00
32	30.00	32.00	72	70.00	72.00
34	32.00	34.00	74	72.00	74.00
36	34.00	36.00	76	74.00	76.00
38	36.00	38.00	78	76.00	78.00
40	38.00	40.00	80	78.00	80.00
42	40.00	42.00			

Height



Plating

G - Gold

Contact Kycon for more options

