


-  Used in high power application
-  Large permissible DC current
-  Ideal for computers and portable power devices, DC-DC converters, energy storage applications and Input-Output filter applications
-  Operating temperature -45°C to +95°C
-  RoHS compliant versions are available

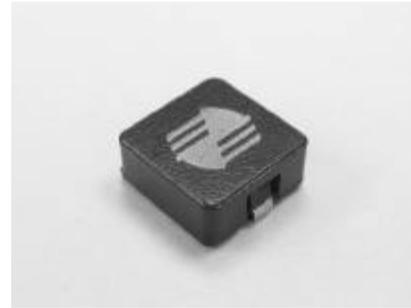

ELECTRICAL SPECIFICATION @ 25°C


| Part Number | RoHS Part Number | Inductance @Irated (μH Typ) | Irated (A) | DCR (mΩ) | | Inductance ¹ @0A _{dc} (μH ± 20%) | Saturation ² Current Isat(A) | Heating ³ Current I _{dc} (A) | Marking (XXXY) |
|---------------|------------------|-----------------------------|------------|----------|------|--|---|--|----------------|
| | | | | Typ | Max | | | | |
| RIS1344A-351M | RIS1344A-351MF | 0.28 | 40 | 1.30 | 1.80 | 0.35 | 40 | 28 | 351M |
| RIS1344A-651M | RIS1344A-651MF | 0.52 | 32 | 2.30 | 2.80 | 0.65 | 32 | 21.5 | 651M |
| RIS1344A-112M | RIS1344A-112MF | 0.88 | 24 | 3.60 | 4.20 | 1.10 | 24 | 19 | 112M |

Notes:

1. Inductance is tested at 100kHz, 0.1V_{rms}, 0A_{dc}.
2. Saturation current, Isat, is the current at which the inductance of the component drops by 20% typical at an ambient temperature of 25°C.
3. Heating current, I_{dc}, is the DC current required to raise the part temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes.
4. The part temperature (ambient temperature + temperature rise) should not exceed the upper limit of the operating temperature under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.



MECHANICAL DIMENSIONS

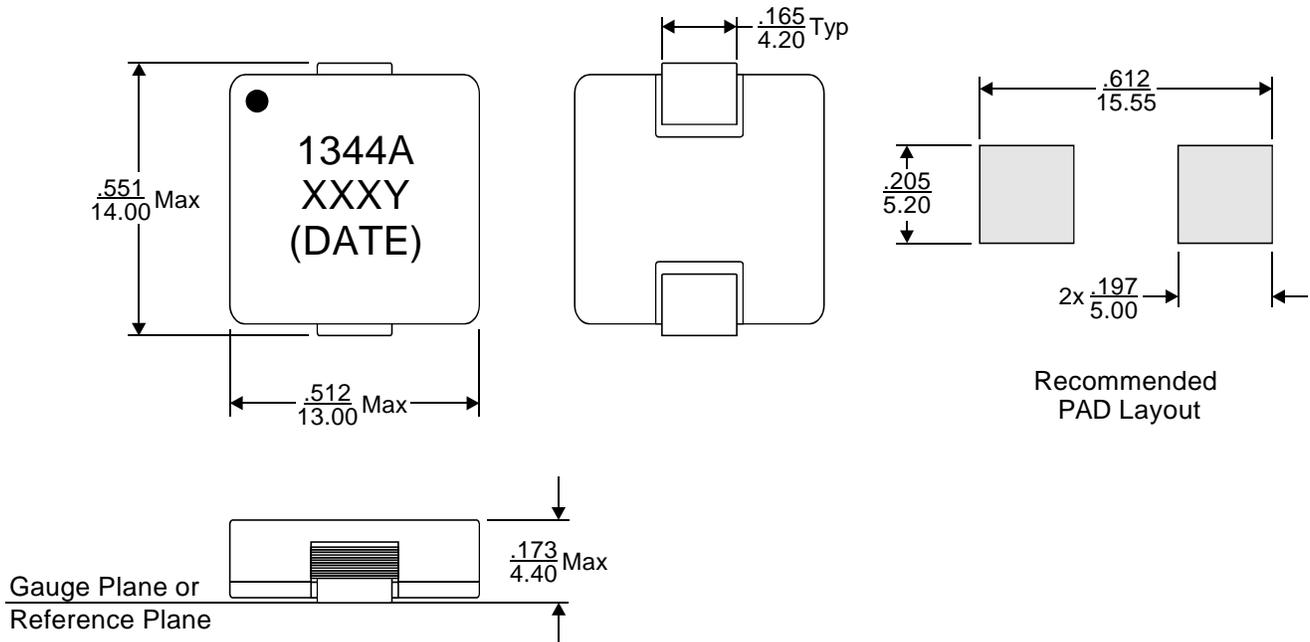


Notes:

5. All dimensions are specified in $\frac{\text{inches}}{\text{mm}}$ with higher precedence in mm.
6. Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$.
7. For available RoHS part number, the part will be marked with "XXXZF", instead of "XXXZ".

| | | |
|------------------|---|------------|
| Weight (in gram) | : | 3.5 typ. |
| Tape & Reel | : | 800 / reel |

SCHEMATICS



FOR MORE INFORMATION, PLEASE CONTACT

HEADQUARTER
2/F Block A, Merit Industrial Centre,
94 Tokwawan Road, Kowloon,
Hong Kong
Tel: (852) 2765 3888
Fax: (852) 2954 3304
Email: eempl@eleceltek.com
Website: <http://www.eleceltek.com>

Information herein is for reference only and subject to change without notice. It does not constitute any representation, warranty or commitment of the company in respect of the products in any aspect. All logos, brands and product names mentioned herein are trademarks or registered trademarks of their respective owners. The company does not assume any liability arising out of the application or use of any product or circuit described herein. Copyrights 2006, E & E Magnetic Products Limited.