


HIGH CURRENT INDUCTORS



PAGE 38

Features

- Easy PCB mount
- Small package vs. inductance
- Shrink tubing optional
- Low cost construction
- Stable core at high frequency

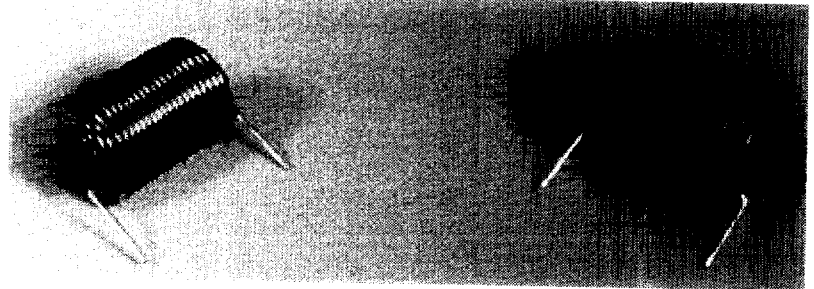

How to order the SW Inductors		
SW-120	120	+/-15%
Model #	Inductance	Tolerance

Model#	Inductance @ 1KHz L=uH	Max DCR Ohms	Rated current (Amps)	Dimension A inch
SW-10	10	0.014	10	0.310
SW-22	22	0.019	10	0.350
SW-33	33	0.026	19	0.400
SW-47	47	0.044	8	0.400
SW-50	50	0.045	8	0.400
SW-68	68	0.051	7	0.450
SW-82	82	0.059	7	0.450
SW-100	100	0.071	6	0.450
SW-120	120	0.078	6	0.500
SW-150	150	0.087	6	0.500
SW-180	180	0.098	6	0.500
SW-220	220	0.116	5	0.560
SW-270	270	0.172	4	0.560
SW-300	300	0.185	3	0.560
SW-330	330	0.200	3	0.600
SW-380	380	0.218	2	0.600

