

"VRD" Series Connector, High Profile, Vertical P.C.B. Mount with Ferrite, Female



Materials

Contact:

Phosphor Bronze, CDA-510

Insulator:

Polyester, Glass-filled,
UL-94V-0, Black

Shell:

Steel

Finishes

Contact:

Selective Au plating over
50 uinches Ni undercoat
on mating area, with
150 uinches Sn/Pb (90/10)
on termination area.

Code A Plating:

Au flash

Code B Plating:


20 uinches Au

Shell:

150 uinches bright tin.

Notes

Consult our factory
specialists for your
specific design needs.

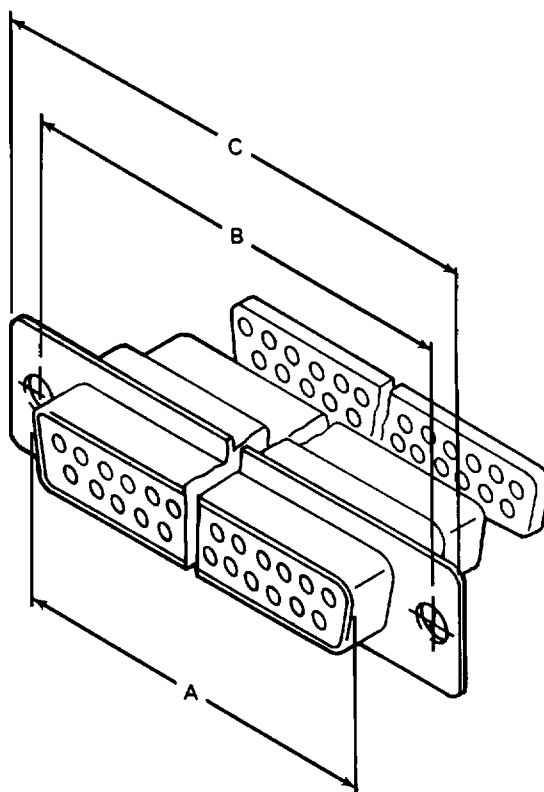

THROUGH HOLE



THREADED INSERT

NUMBER OF CONTACT POSITIONS	DIMENSION			PLATING CODE	PART NUMBER	
	A	B	C		THRU HOLE	#4-40 THREADED INSERT
9	.642	.989	1.208	A	301-111-100-HF	301-111-101-HF
	[16.31]	[24.99]	[30.68]	B	301-111-200-HF	301-111-201-HF
15	.970	1.312	1.536	A	301-121-100-HF	301-121-101-HF
	[24.64]	[33.32]	[39.01]	B	301-121-200-HF	301-121-201-HF
25	1.510	1.852	2.083	A	301-131-100-HF	301-131-101-HF
	[38.35]	[47.04]	[52.91]	B	301-131-200-HF	301-131-201-HF
37	2.158	2.500	2.724	A	301-141-100-HF	301-141-101-HF
	[54.81]	[63.50]	[69.19]	B	301-141-200-HF	301-141-201-HF