
	ISSUE	2
	PAGE OF	V3-22

CATALOG LISTING

REPLACES X99284-V3

RELEASE NO. PR-21675

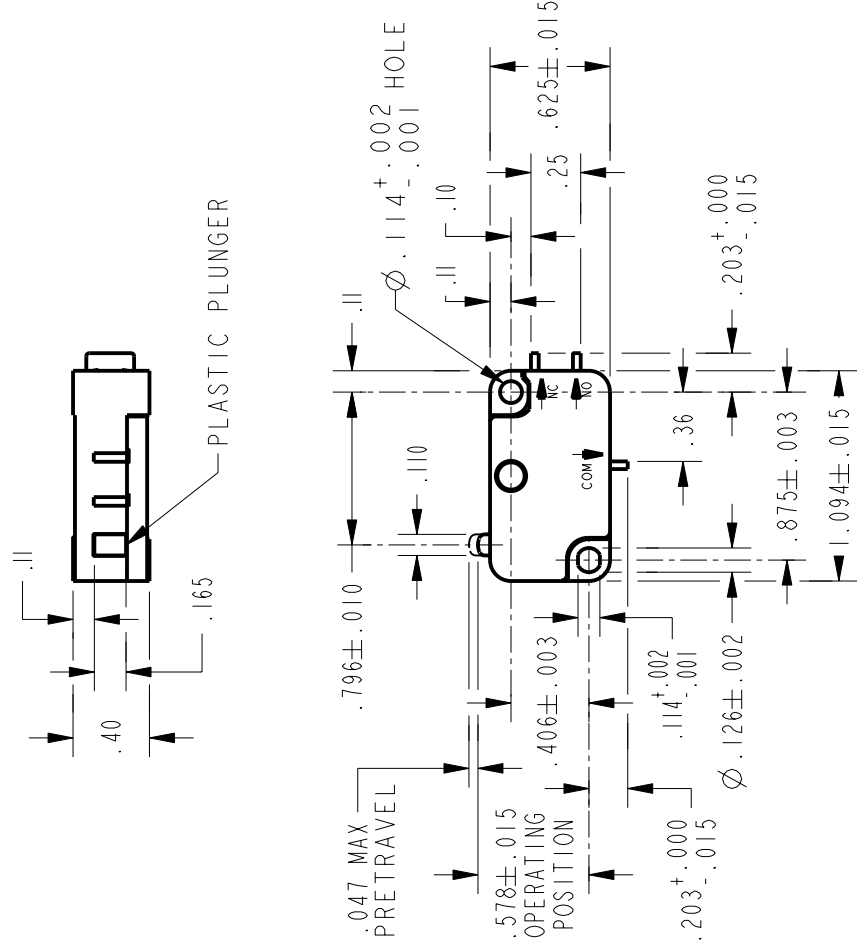


NOTES

- 1 - NO HOLES IN TERMINALS
- 2 - TERMINALS ARE PLATED
- 3 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 300 ° F

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE		THIRD ANGLE PROJECTION	
OPERATING FORCE	6 - 14 OZ	CONTACT ARRANGEMENT		FULL	SCALE PRINT	DO NOT	
RELEASE FORCE	4 OZ MIN	S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		THIRD ANGLE PROJECTION	
DIFFERENTIAL TRAVEL	.006-.016	L83 15.1A 1/2HP 125, 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"		ONE PLACE	(.0)	±.030	
OVERTRAVEL	.040 MIN			TWO PLACE	(.00)	±.015	
FREE POSITION	.625 MAX			THREE PLACE	(.000)	±.005	
RELEASE TRAVEL	.007 MIN			ANGLES		±	
				WEIGHT		.015 LB	

PTC/CAD 2D

TSM 17JUN99

DRAWN

CHECK

JAF

17JUN99

CHECK

CHECK

REVISIONS

A C095160

TSM

17JUN99

65N99

CHECK