


CERAMIC MICROWAVE FILTERS STANDARD LAND PATTERNS-DUPLEXERS

KB TYPE/E-AMPS


DFYKR836CR881HHA

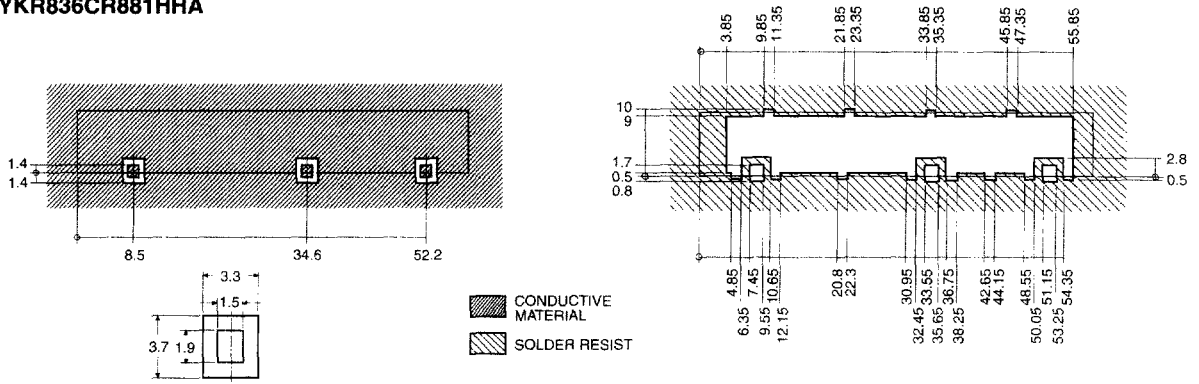

Note: Impedance of both input and output lines should be 50ohms including land pattern. The standard condition is applying glass epoxy board (dielectric constant = 4.8, copper metalized on both surfaces) and the input and output lines are connected to 50ohms microstrip lines on the back side surface through the via hole.


DP TYPE/E-AMPS/TDMA/CDMA

DFY2R836CR881BHD
DFY2R836CR881BHA
DFY2R836CR881BHNN

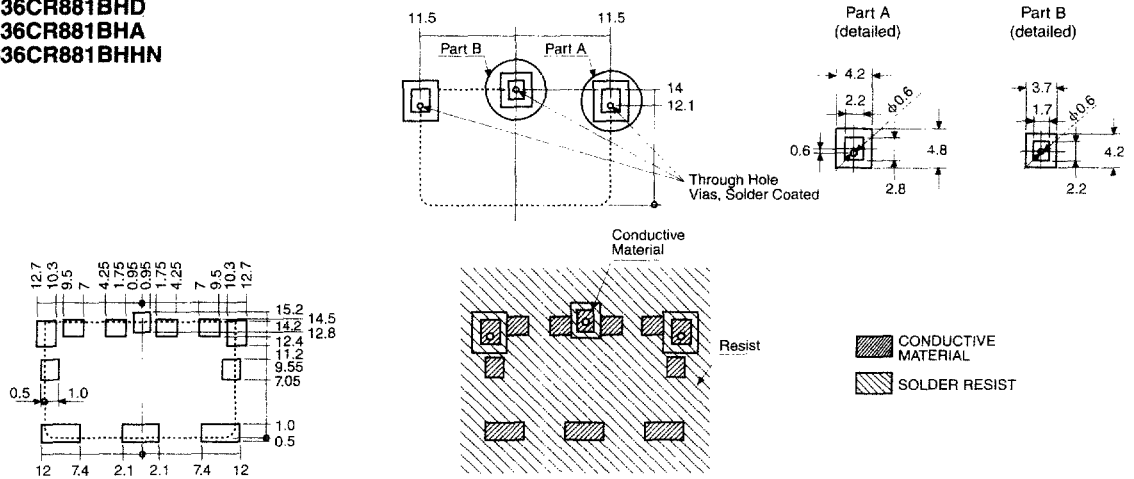


DP TYPE

DFY2R836CR881GHD

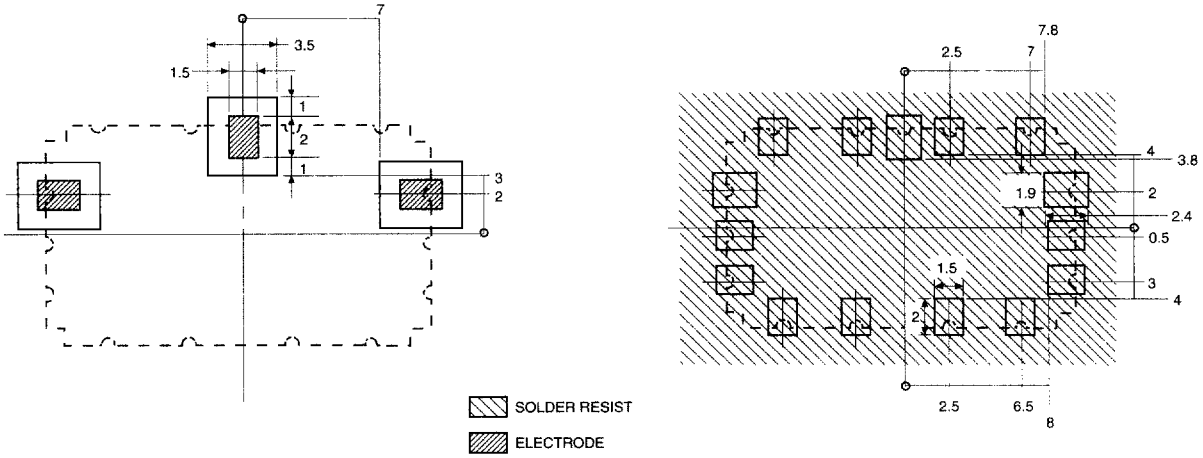

DP TYPE/GSM/PCS/DCS 1800

DFY2R902CR947BHG
DFY2R902CR947BHGF
DFY21R88C1R96BHG
DFY21R88C1R96BHGF
DFY21R74C1R84BHE
DFY21R74C1R84BHF

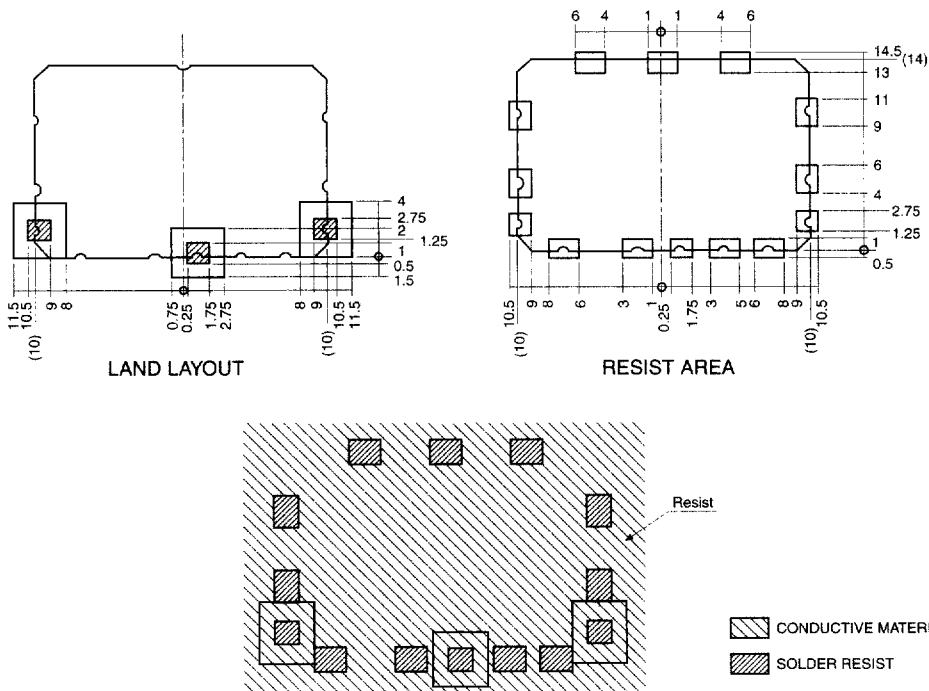

CERAMIC MICROWAVE FILTERS