




The **PCIH** series was developed specifically for use with **CompactPCI®** in-rack modular power supplies. The package size is ideal for use in all 3U and 6U based platforms. The PCIH series is an excellent choice in **IEEE 1101.1**, **IEEE 1101.10**, and **VITA 30** applications where system power requirements have exceeded the capabilities of commonly used power connectors.

The **PCIH47** variant is fully compliant to the **PICMG® 2.11 Power Interface Specification**. This Specification details standardized power for use with **CompactPCI®** systems. Visit www.picmg.com for details.


PCIH SERIES CONTACT VARIANTS

FACE VIEW OF MALE AND REAR VIEW OF FEMALE




PCIH38 VARIANT

23 Size 16 Power Contacts and 15 Size 20 Signal Contacts




PCIH38R VARIANT (Inverted Termination)

CompactPCI®




PCIH47 VARIANT

23 Size 16 Power Contacts and 24 Size 22 Signal Contacts




PCIH47R VARIANT (Inverted Termination)



PCIH49W25 VARIANT

25 Size 16 Power Contacts and 24 Size 22 Signal Contacts



PCIH49W25R VARIANT



MATERIALS AND FINISHES:

Insulator: Glass-filled polyester, UL 94V-0, blue color.

Contacts: Size 16 contacts: High conductivity precision-machined copper alloy. Size 20 and 22 contacts: Precision-machined copper alloy. Plating: gold flash over nickel. Other plating options available, refer to Step 7 on page 36.

Mounting Screws: Steel, zinc plated.

ELECTRICAL CHARACTERISTICS:

PCIH Contact Current Ratings, per UL 1977

See *Temperature Rise Curves* on page 4 for details.

PCIH38:

Size 16 Power Contacts:
Positions 36, 37, and 38: 40 amperes continuous, all contacts under load.
Positions 1 - 20: 28 amperes continuous, all contacts under load.
Size 20 Signal Contacts: 5 amperes nominal rating.

PCIH47:

Size 16 Power Contacts:
Positions 45, 46, and 47: 40 amperes continuous, all contacts under load.
Positions 1 - 20: 28 amperes continuous, all contacts under load.
Size 22 Signal Contacts: 3 amperes nominal rating.

PCIH49:

Size 16 Power Contacts:
Positions 45 through 49: 37 amperes continuous, all contacts under load.
Positions 1 - 20: 28 amperes continuous, all contacts under load.
Size 22 Signal Contacts: 3 amperes nominal rating.

Initial Contact Resistance; maximum:

Size 16 Contact: 0.0007 ohms maximum.
Size 20 Contact: 0.004 ohms maximum.
Size 22 Contact: 0.004 ohms maximum.

Insulator Resistance: 5 G ohms per IEC 512-2, Test 3a.

Voltage Proof:

PCIH38:

Contacts 36, 37 and 38: 3,000 V r.m.s.
Contacts 1 through 20: 1,500 V r.m.s.
Contacts 21 through 35: 1,000 V r.m.s.

PCIH47:

Contacts 45, 46, and 47: 3,000 V r.m.s.
Contacts 1 through 20: 1,500 V r.m.s.
Contacts 21 through 44: 1,000 V r.m.s.

PCIH49:

Contacts 1 through 20: 1,500 V r.m.s.
Contacts 45 through 49: 1,500 V r.m.s.
Contacts 21 through 44: 1,000 V r.m.s.

Creepage and Clearance Distance; minimum:

PCIH38:

Contact 38 to Contact 36: 3.2mm [0.126 inch]
Contact 37 to Contact 36: 3.2mm [0.126 inch]
Contact 38 to Signal Contacts: 6.4mm [0.252 inch]
Contact 37 to Signal Contacts: 6.4mm [0.252 inch]
Contact 38 to Contact 37: 2.5mm [0.098 inch]
Contact 36 to Signal Contacts: 2.0mm [0.079 inch]

PCIH47:

Contact 47 to Contact 45: 3.2mm [0.126 inch]
Contact 46 to Contact 45: 3.2mm [0.126 inch]
Contact 47 to Signal Contacts: 6.4mm [0.252 inch]
Contact 46 to Signal Contacts: 6.4mm [0.252 inch]
Contact 47 to Contact 46: 2.5mm [0.098 inch]
Contact 45 to Signal Contacts: 2.0mm [0.079 inch]

PCIH49:

Contact 36 to Signal Contacts: 2.0mm [0.079 inch]

Working Voltage:

PCIH38:

Contacts 36, 37 and 38: 1,000 V r.m.s.
Contacts 1 through 20: 500 V r.m.s.
Contacts 21 through 35: 333 V r.m.s.

PCIH47:

Contacts 45, 46, and 47: 1,000 V r.m.s.
Contacts 1 through 20: 500 V r.m.s.
Contacts 21 through 44: 333 V r.m.s.

PCIH49:

Contacts 1 through 20: 500 V r.m.s.
Contacts 45 through 49: 500 V r.m.s.
Contacts 21 through 44: 333 V r.m.s.

MECHANICAL CHARACTERISTICS:

Blind Mating System:

Male and female connector bodies provide "lead-in" for 1.3 mm [0.050 inch] diametral misalignment.

Polarization:

Provided by connector body design.

Removable Contacts:

Install contact from rear of insulator; release from front of insulator. Size 16, 20 and 22 female contacts feature "Closed Entry" design for highest reliability.

Removable Contact Retention in Connector Body:

Size 16 Contacts: 67 N [15 lbs.]
Size 20 Contacts: 45 N [10 lbs.]
Size 22 Contacts: 27 N [6 lbs.]

Fixed Contacts:

Printed board terminations, both straight and right angle (90°). Size 16 female contacts feature "Closed Entry" design. Size 20 and 22 feature rugged "Robi-D Open Entry" contact design. "Closed Entry" contacts available, consult Technical Sales.



**Fixed Contact Retention
in Connector Body:**

Size 16 Contacts: 45 N [10 lbs.]
Size 20 and 22 Contacts: 27 N [6 lbs.]

Resistance to Solder Heat:

260°C [500°F] for 10 seconds
duration per IEC 512-6, Test
12e, 25-watt soldering iron.

Sequential Contact Mating System:

PCIH38: First mate contact 36 and last
mate contact positions 22, 25
and 28.

**PCIH47 and
PCIH49 with MOS:** First mate contact 45 and last
mate contact position 27.

Consult Technical Sales for customer specified sequential mating.

**Safety "Recessed in
Insulator" Contacts:**

The following size 16 contacts
are recessed 5mm [0.197 inch]
below the face of the female
connector insulator per safety
requirements.

PCIH38: Contact positions 37 and 38.

**PCIH47 and
PCIH49 with MOS:** Contact positions 46 and 47.

Compliant Terminations: Size 16, 20 and 22 contacts are
available with Compliant
Contact Terminations.

**Printed Board
and Panel Mounting:**

Mounting holes provided in
connector body for both printed
board and panel mounting.
Self-tapping screws are
available.

Mechanical Operations:

250 couplings, minimum.


CLIMATIC CHARACTERISTICS:

Working Temperature: -55°C to +125°C.

**U.L. Recognized File #E49351
CSA Recognized File #LR54219
TUV Recognized File #215/99**



**For RoHS options
see page 36.**

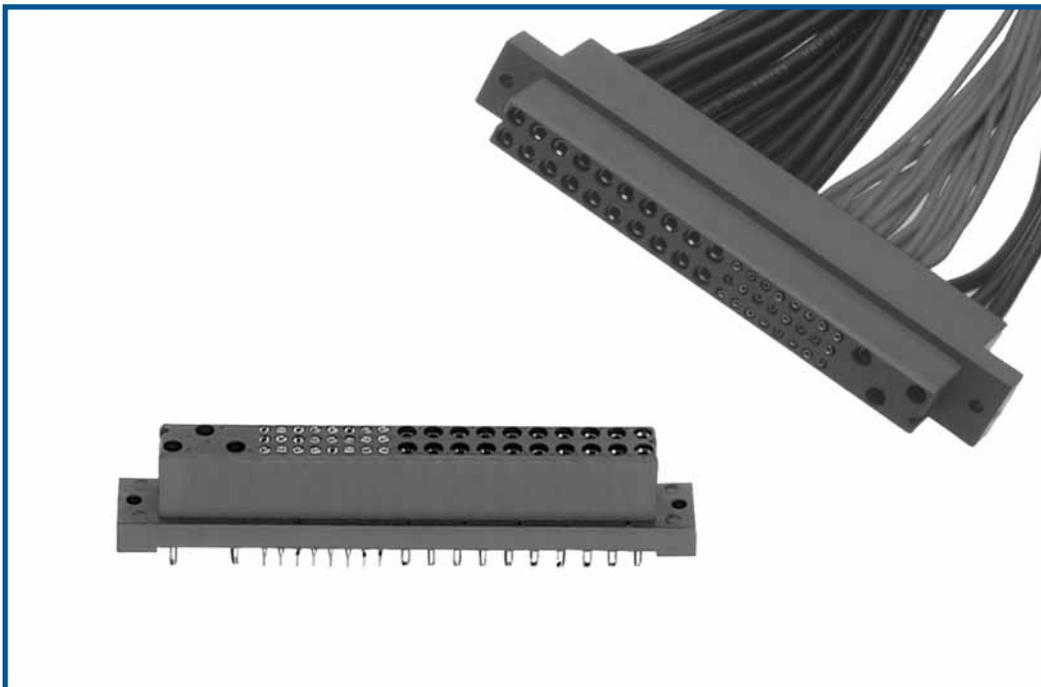




PCIH SERIES


PCIH CONNECTOR OUTLINE DIMENSIONS

RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR

MALE CONNECTOR

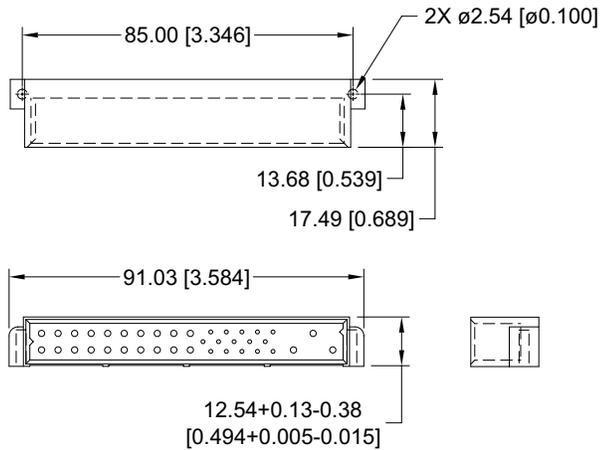


FEMALE CONNECTOR

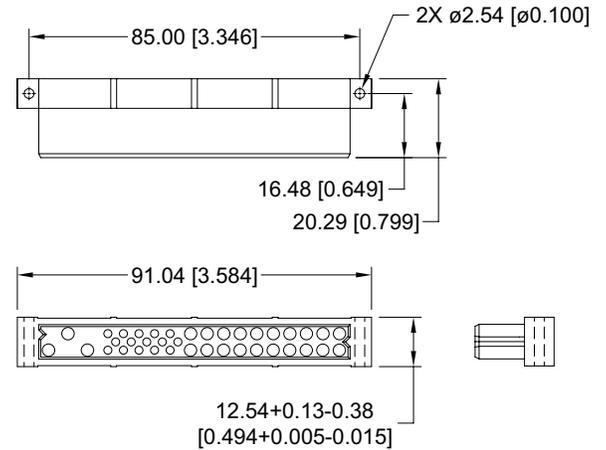


STRAIGHT BOARD MOUNT CONNECTOR

MALE CONNECTOR

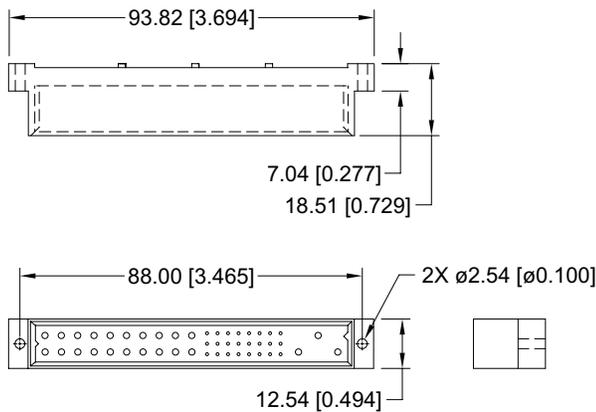


FEMALE CONNECTOR

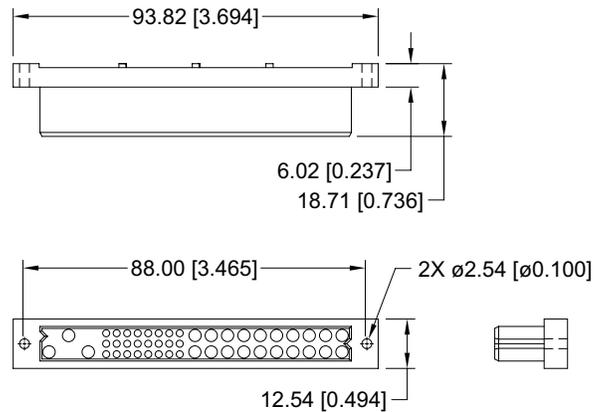


PCIH CONNECTOR MATING DIMENSIONS


(FULLY MATED)




Straight Board Mount Male to Straight Board Mount or Panel Mount Female



Straight Board Mount Male to Right Angle (90°) Board Mount Female





Right Angle (90°) Board Mount Male to Straight Board Mount or Panel Mount Female

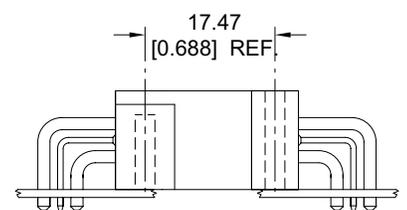

Right Angle (90°) Board Mount Male to Right Angle (90°) Board Mount Female

FEMALE STRAIGHT SOLDER CONNECTOR CODE 3

STANDARD PART NUMBER
PCIH38F300A1

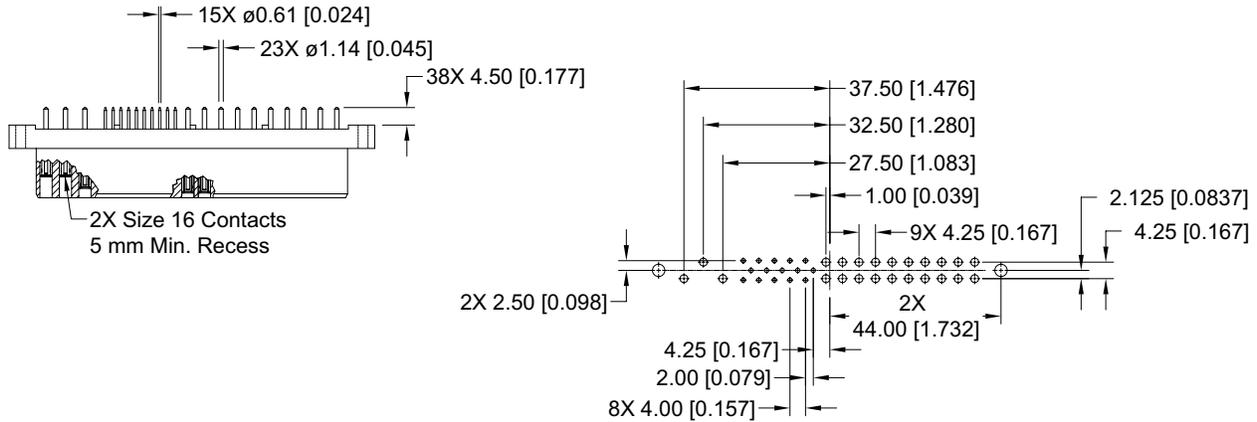

CONNECTOR DIMENSIONS

CONTACT HOLE PATTERN


Note: See below for suggested printed board hole sizes.

FEMALE STRAIGHT SOLDER CONNECTOR WITH A.C. PASS-THROUGH CODE 3 WITH MOS* -245.0


CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

HIGH PROFILE PART NUMBER
PCIH38F300A1-245.0

* For MOS descriptions,
see chart on pages 111-112.

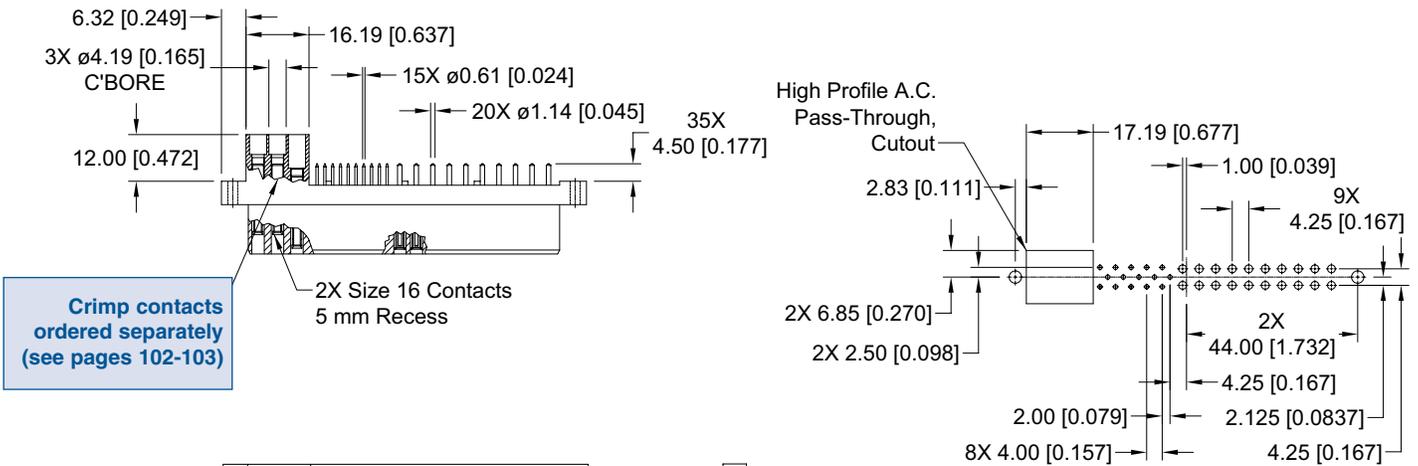

**Crimp contacts
ordered separately
(see pages 102-103)**



CONNECTOR DIMENSIONS

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:

- Suggest $\varnothing 1.00$ [0.039] holes for size 20 and size 22 contact holes.
- Suggest $\varnothing 1.60$ [0.063] holes for size 16 contact holes.
- Suggest $\varnothing 3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.

DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.



STRAIGHT SOLDER CONNECTOR, FEMALE

FEMALE STRAIGHT SOLDER CONNECTOR WITH A.C. PASS-THROUGH CODE 3 WITH MOS* -246.1



CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

LOW PROFILE PART NUMBER
PCIH38F300A1-246.1


* For MOS descriptions,
see chart on pages 111-112.

PCIH SERIES

Crimp contacts
ordered separately
(see pages 102-103)

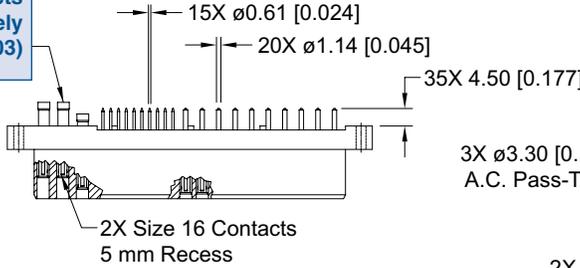

CONNECTOR DIMENSIONS


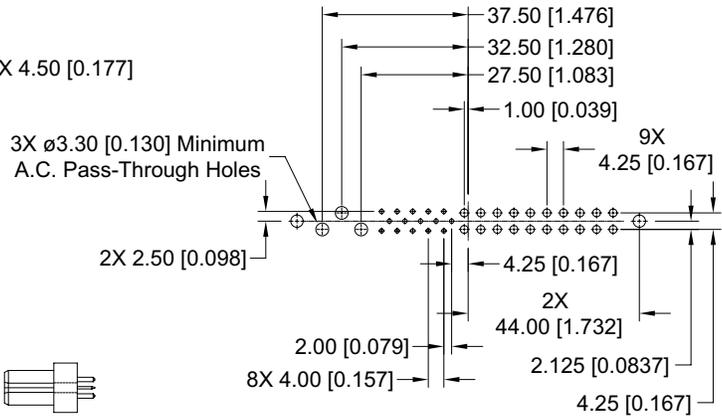


CONTACT HOLE PATTERN


Note: See below for suggested printed board hole sizes.

FEMALE STRAIGHT SOLDER CONNECTOR CODE 3

STANDARD PART NUMBER
PCIH47F300A1

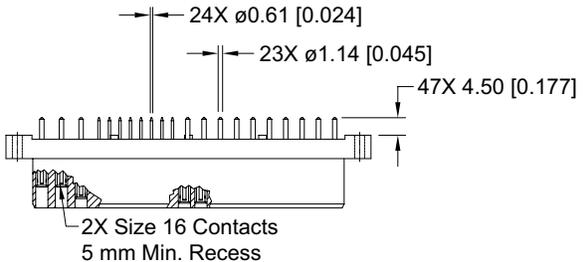

CONNECTOR DIMENSIONS

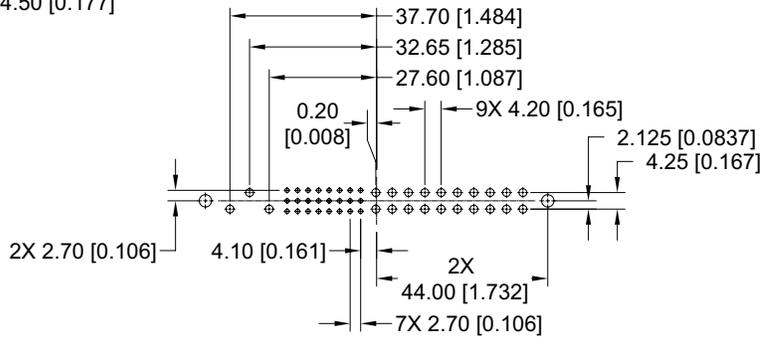

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest Ø1.00 [0.039] holes for size 20 and size 22 contact holes.
Suggest Ø1.60 [0.063] holes for size 16 contact holes.
Suggest Ø3.56±0.08 [0.140±0.003] holes for connector mounting holes.



**FEMALE STRAIGHT SOLDER CONNECTOR WITH A.C. PASS-THROUGH
CODE 3 WITH MOS* -246.0**

CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY


**LOW PROFILE PART NUMBER
PCIH47F300A1-246.0**

** For MOS descriptions,
see chart on pages 111-112.*

Crimp contacts
ordered separately
(see pages 102-103)

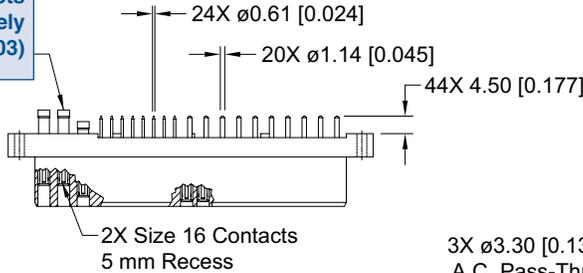

CONNECTOR DIMENSIONS

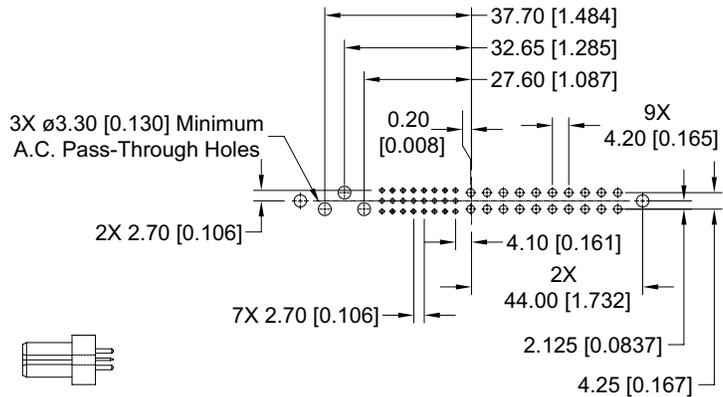

CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes.



**FEMALE STRAIGHT SOLDER CONNECTOR WITH A.C. PASS-THROUGH
CODE 3 WITH MOS* -246.3**

CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY


**LOW PROFILE PART NUMBER
PCIH49W25F300A1-246.3**

** For MOS descriptions,
see chart on pages 111-112.*

Crimp contacts
ordered separately
(see pages 102-103)

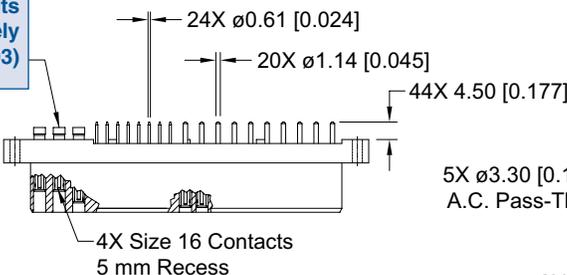

CONNECTOR DIMENSIONS

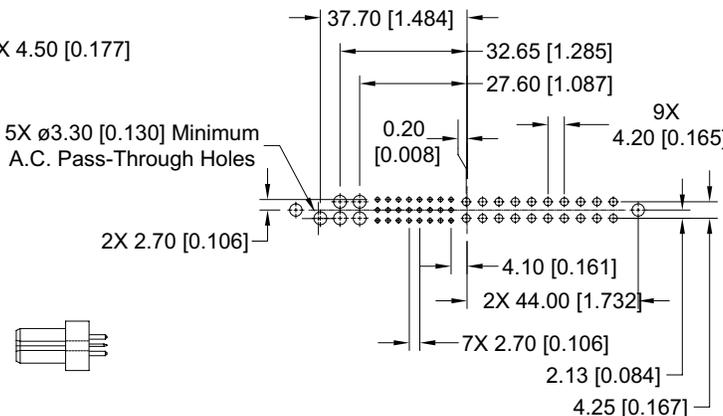

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:

- Suggest $\phi 1.00$ [0.039] holes for size 20 and size 22 contact holes.
- Suggest $\phi 1.60$ [0.063] holes for size 16 contact holes.
- Suggest $\phi 3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.

DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.



Positronic Industries
connectpositronic.com




STRAIGHT SOLDER CONNECTOR, FEMALE

Compact
Power
Connectors

FEMALE STRAIGHT SOLDER CONNECTOR CODE 3 WITH MOS* -379.0

STANDARD PART NUMBER
PCIH49W25F300A1-379.0

* For MOS descriptions,
see chart on pages 111-112.

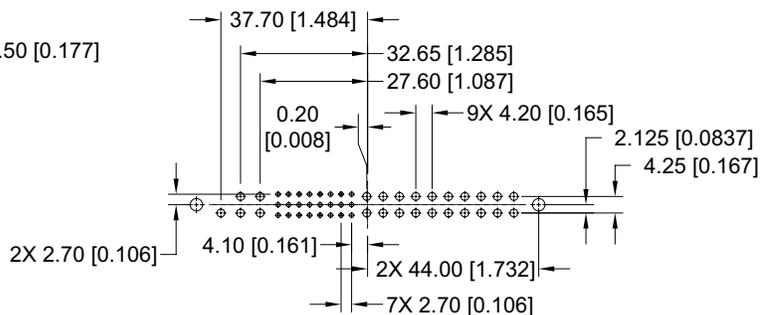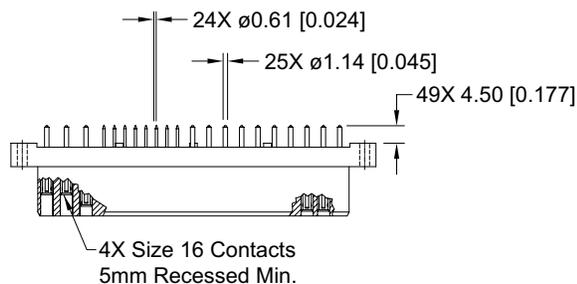

CONNECTOR DIMENSIONS



CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes.

SUGGESTED PRINTED BOARD HOLE SIZES:



Suggest \varnothing 1.00 [0.039] holes for size 20 and size 22 contact holes.

Suggest \varnothing 1.60 [0.063] holes for size 16 contact holes.


Suggest \varnothing 3.56 \pm 0.08 [0.140 \pm 0.003] holes for connector mounting holes.

**MALE STRAIGHT SOLDER CONNECTOR
CODE 3**

**STANDARD PART NUMBER
PCIH38M300A1**

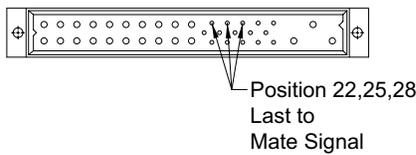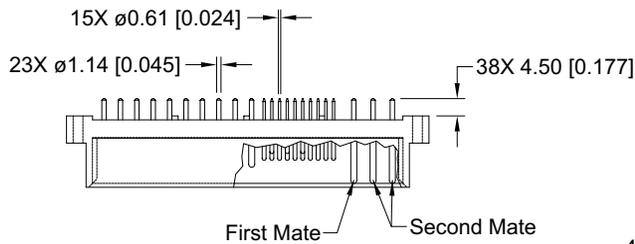

CONNECTOR DIMENSIONS

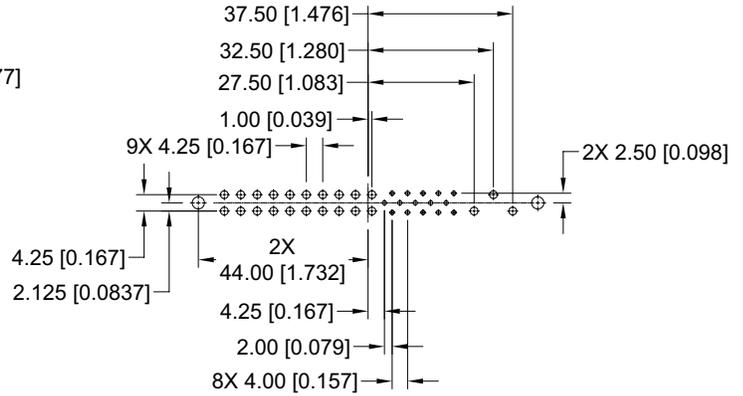



CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes.


PCIH SERIES

**MALE STRAIGHT SOLDER CONNECTOR
CODE 3**

**STANDARD PART NUMBER
PCIH47M300A1**

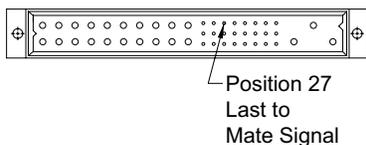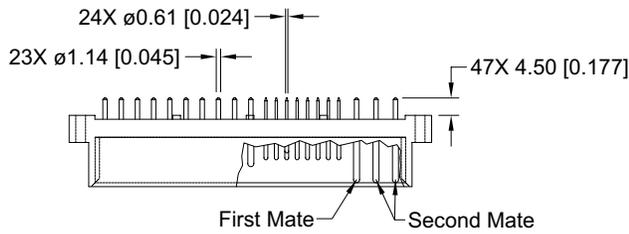

CONNECTOR DIMENSIONS

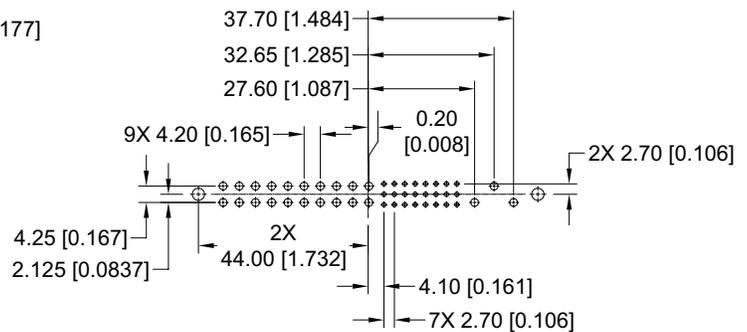

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest Ø1.00 [0.039] holes for size 20 and size 22 contact holes.
Suggest Ø1.60 [0.063] holes for size 16 contact holes.
Suggest Ø3.56±0.08 [0.140±0.003] holes for connector mounting holes.

**DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.**




MALE STRAIGHT SOLDER CONNECTOR CODE 3 WITH MOS* -378.0

STANDARD PART NUMBER
PCIH49W25M300A1-378.0

* For MOS descriptions,
see chart on pages 111-112.

PCIH SERIES

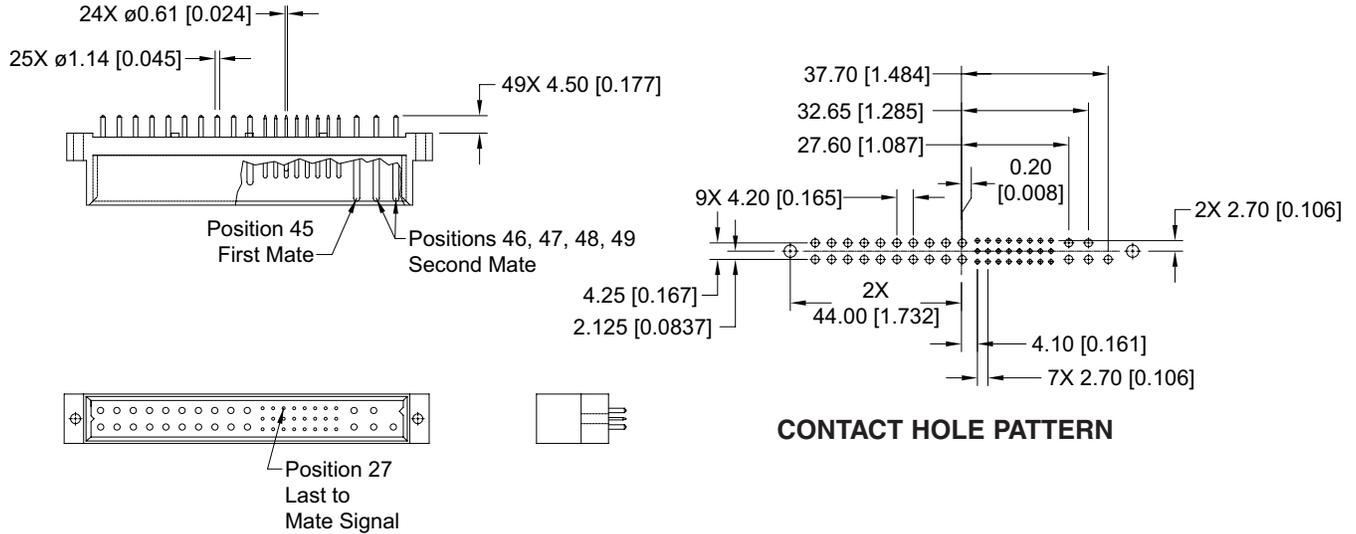

CONNECTOR DIMENSIONS

CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes.

SUGGESTED PRINTED BOARD HOLE SIZES:


Suggest $\varnothing 1.00$ [0.039] holes for size 20 and size 22 contact holes.

Suggest $\varnothing 1.60$ [0.063] holes for size 16 contact holes.


Suggest $\varnothing 3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.

**FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR
CODE 4**

**STANDARD PART NUMBER
PCIH38F400A1**

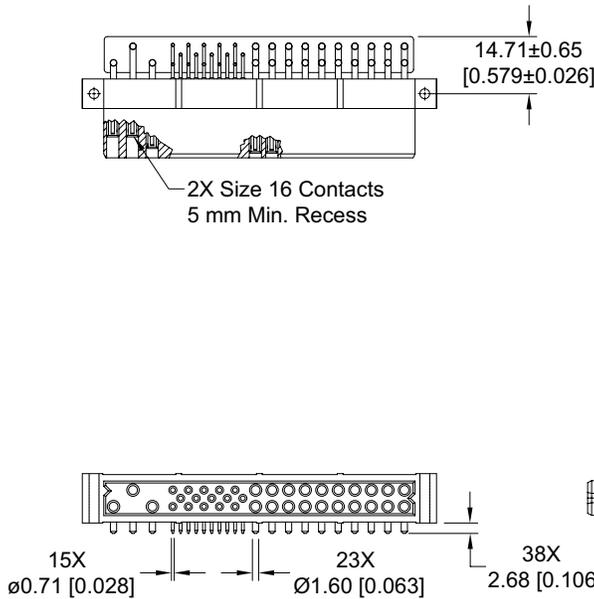

CONNECTOR DIMENSIONS

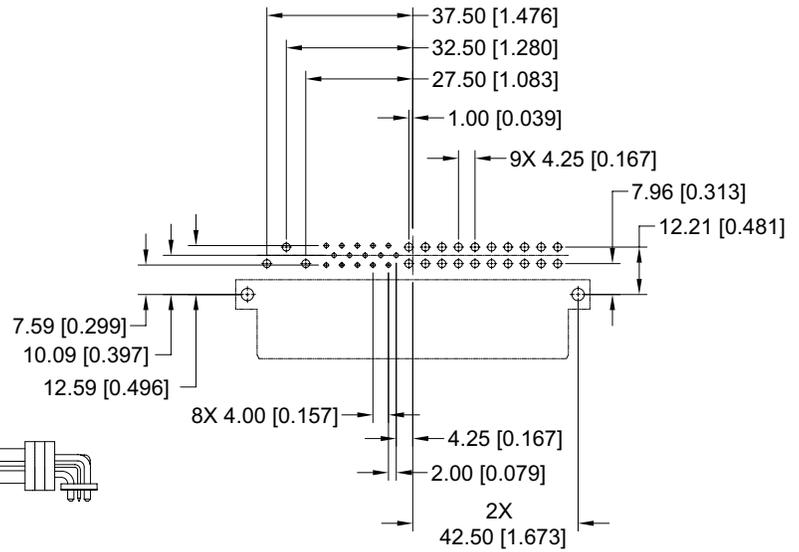


CONTACT HOLE PATTERN


Note: See below for suggested printed board hole sizes.

**FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR
CODE 4**

**PART NUMBER FOR INVERTED TERMINATION
PCIH38RF400A1**

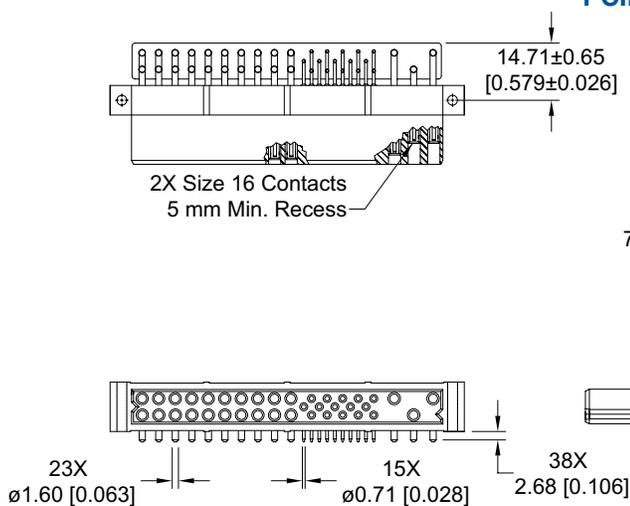

CONNECTOR DIMENSIONS

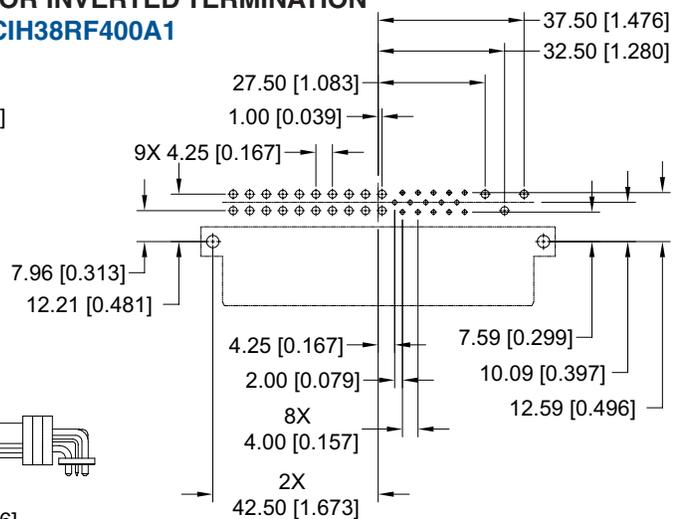

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:



- Suggest ∅1.14 [0.045] holes for size 20 contact holes.
- Suggest ∅2.03 [0.080] holes for size 16 contact holes.
- Suggest ∅3.56±0.08 [0.140±0.003] holes for connector mounting holes.




RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR, FEMALE

FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR CODE 4

STANDARD PART NUMBER
PCIH47F400A1

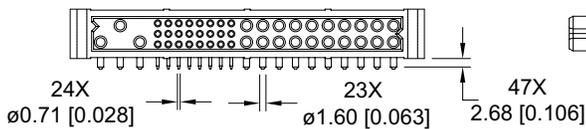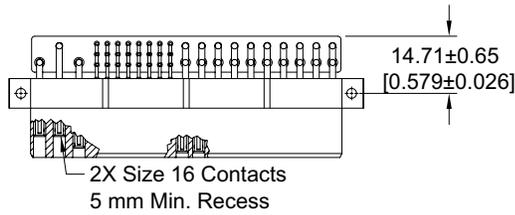

CONNECTOR DIMENSIONS


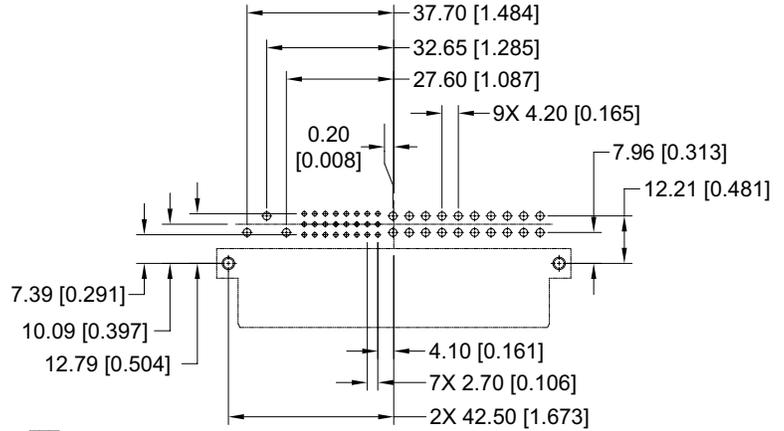


CONTACT HOLE PATTERN


Note: See below for suggested printed board hole sizes.

FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR CODE 4

PART NUMBER FOR INVERTED TERMINATION
PCIH47RF400A1

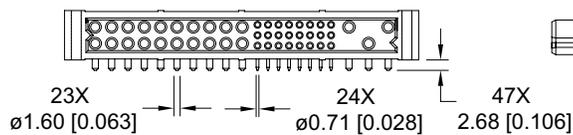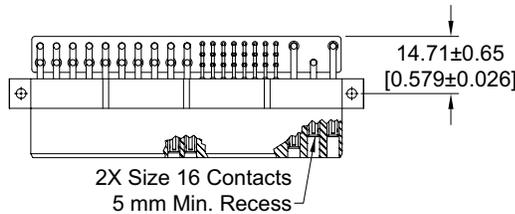

CONNECTOR DIMENSIONS

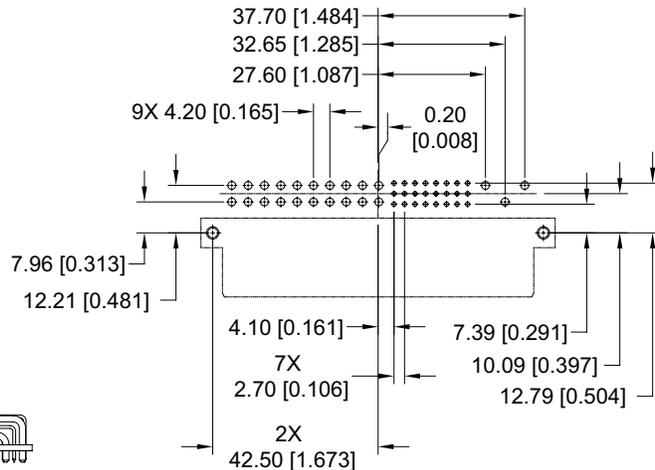

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:

- Suggest Ø1.14 [0.045] holes for size 22 contact holes.
- Suggest Ø2.03 [0.080] holes for size 16 contact holes.
- Suggest Ø3.56±0.08 [0.140±0.003] holes for connector mounting holes.

PCIH SERIES




**FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR WITH A.C. PASS-THROUGH
CODE 4 WITH MOS* -246.4**

CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

**STANDARD PART NUMBER
PCIH47F400A1-246.4**

* For MOS descriptions,
see chart on pages 111-112.

Crimp contacts ordered separately (see pages 102-103)

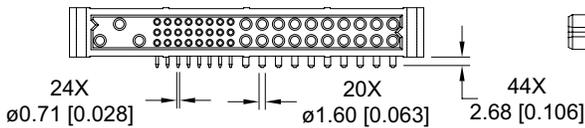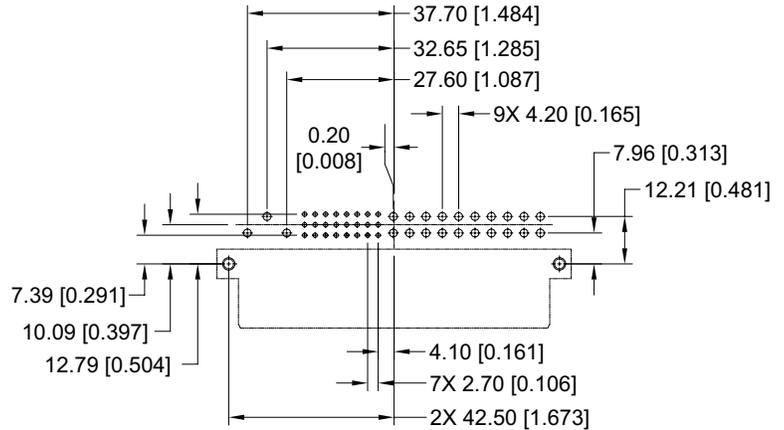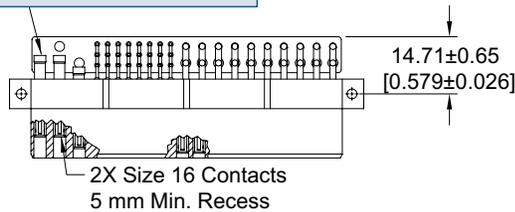

CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes.

CONNECTOR DIMENSIONS




**FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR WITH A.C. PASS-THROUGH
CODE 4 WITH MOS* -246.4**

CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

**PART NUMBER FOR INVERTED TERMINATION
PCIH47RF400A1-246.4**

* For MOS descriptions,
see chart on pages 111-112.

Crimp contacts ordered separately (see pages 102-103)

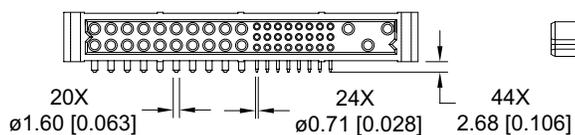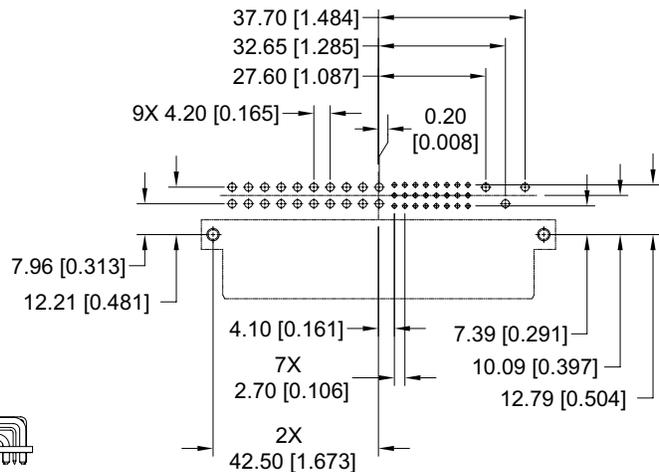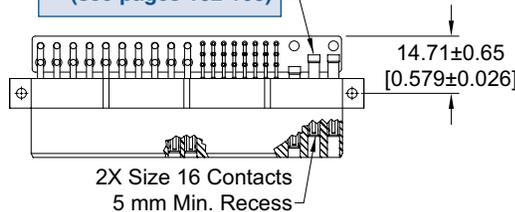

CONTACT HOLE PATTERN

CONNECTOR DIMENSIONS

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest Ø1.14 [0.045] holes for size 22 contact holes.
Suggest Ø2.03 [0.080] holes for size 16 contact holes.
Suggest Ø3.56±0.08 [0.140±0.003] holes for connector mounting holes.

DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.



RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR, FEMALE

FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR


CODE 4 WITH MOS* -379.0

STANDARD PART NUMBER


PCIH49W25F400A1-379.0

* For MOS descriptions,
see chart on pages 111-112.

PCIH SERIES

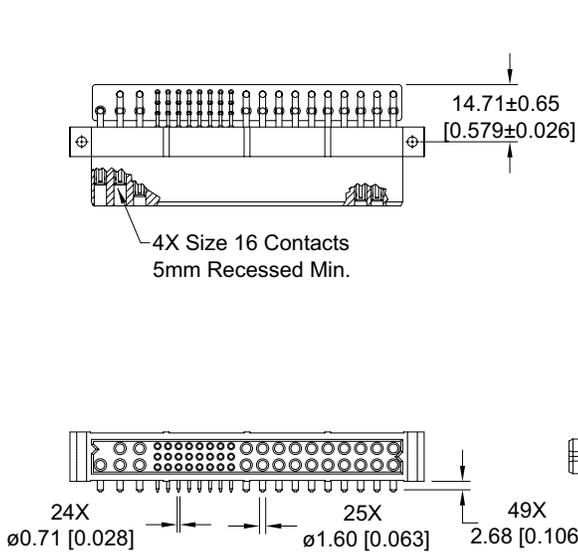

CONNECTOR DIMENSIONS

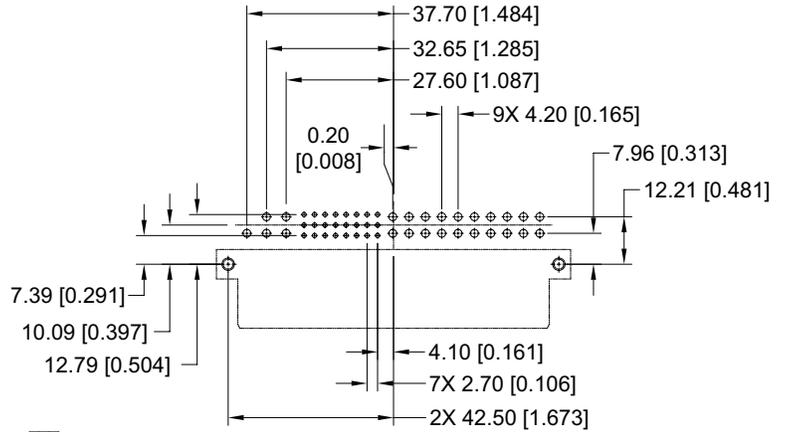

CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes.


FEMALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR

CODE 4 WITH MOS* -379.0


PART NUMBER FOR INVERTED TERMINATION

PCIH49W25RF400A1-379.0

* For MOS descriptions,
see chart on pages 111-112.

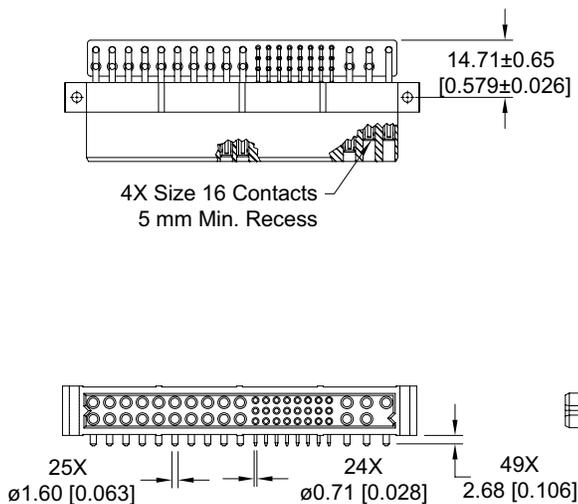

CONNECTOR DIMENSIONS

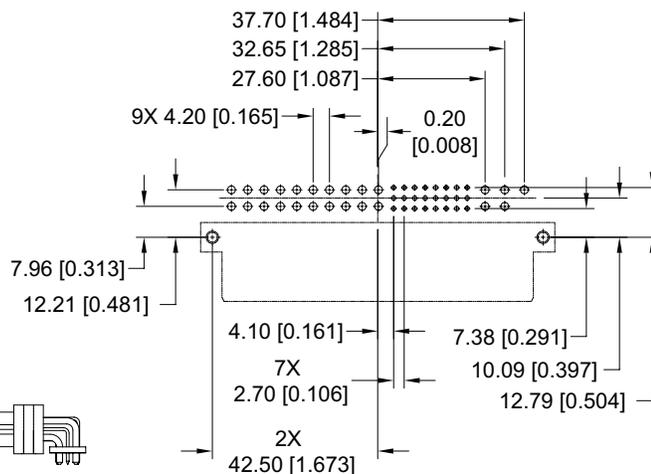

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:


Suggest Ø1.14 [0.045] holes for size 22 contact holes.

Suggest Ø2.03 [0.080] holes for size 16 contact holes.

Suggest Ø3.56±0.08 [0.140±0.003] holes for connector mounting holes.

**MALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR
CODE 4**


**STANDARD PART NUMBER
PCIH38M400A1**

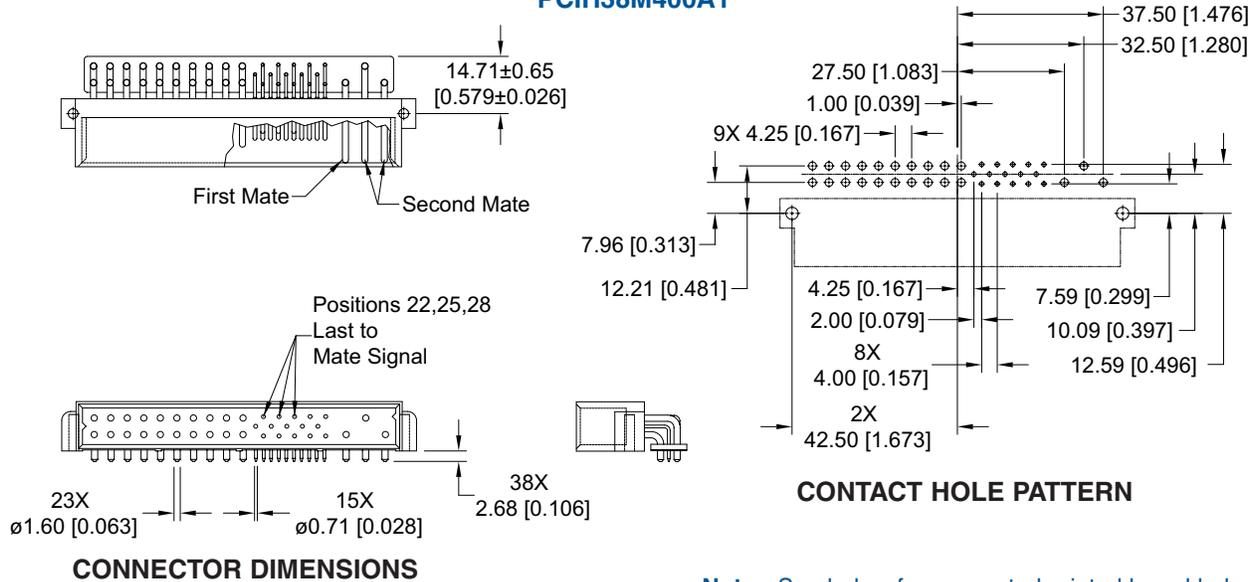

Note: See below for suggested printed board hole sizes.

**MALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR
CODE 4**

**PART NUMBER FOR INVERTED TERMINATION
PCIH38RM400A1**

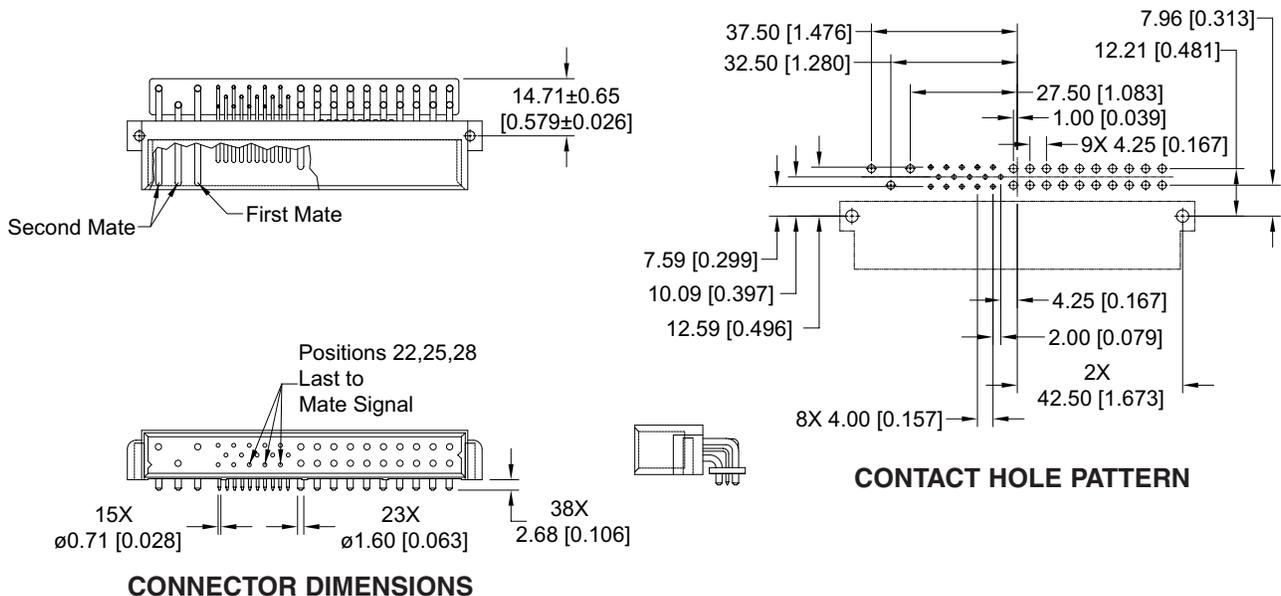

SUGGESTED PRINTED BOARD HOLE SIZES:

- Suggest Ø1.14 [0.045] holes for size 20 contact holes.
- Suggest Ø2.03 [0.080] holes for size 16 contact holes.
- Suggest Ø3.56±0.08 [0.140±0.003] holes for connector mounting holes.


**DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.**



RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR, MALE


MALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR CODE 4

STANDARD PART NUMBER
PCIH47M400A1

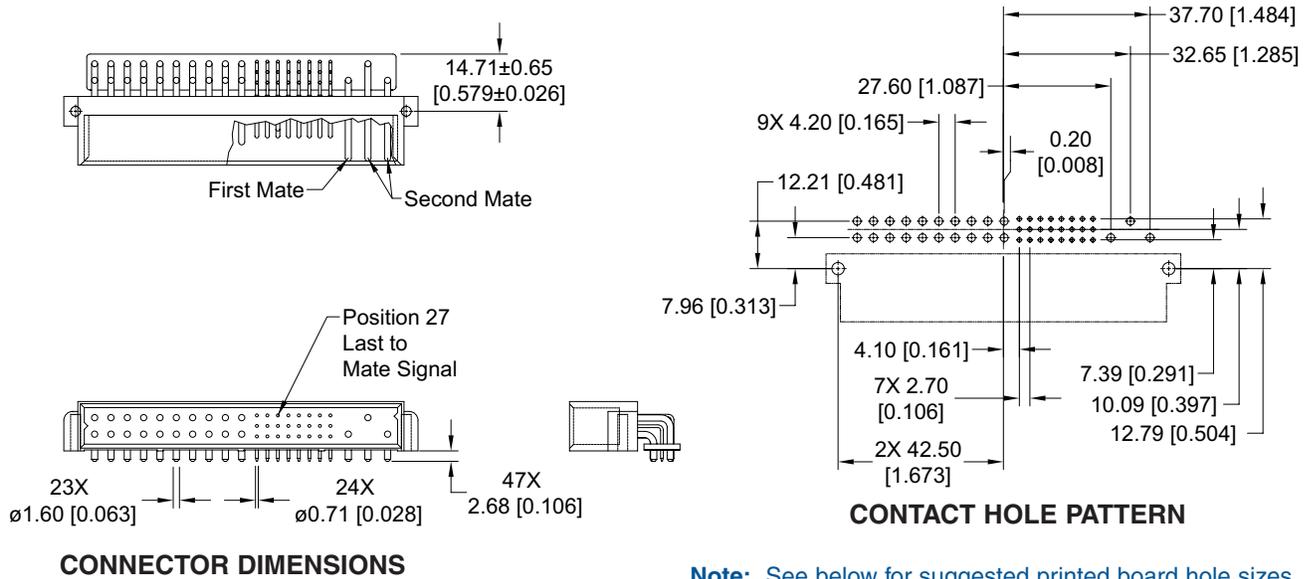

MALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR CODE 4

PART NUMBER FOR INVERTED TERMINATION
PCIH47RM400A1

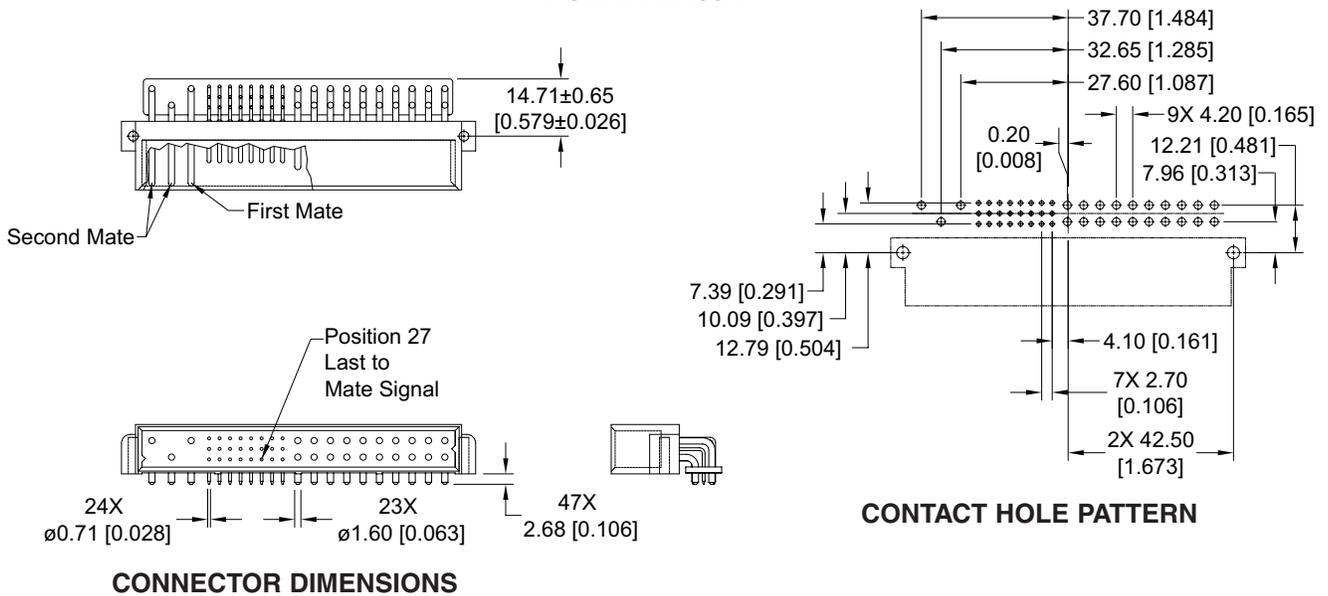

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest Ø1.14 [0.045] holes for size 22 contact holes.


Suggest Ø 2.03 [0.080] holes for size 16 contact holes.

Suggest Ø 3.56±0.08 [0.140±0.003] holes for connector mounting holes.


**MALE RIGHT ANGLE (90°) BOARD MOUNT CONNECTOR
CODE 4 WITH MOS* -378.0
STANDARD PART NUMBER
PCIH49W25M400A1-378.0**

** For MOS descriptions,
see chart on pages 111-112.*

PCIH SERIES

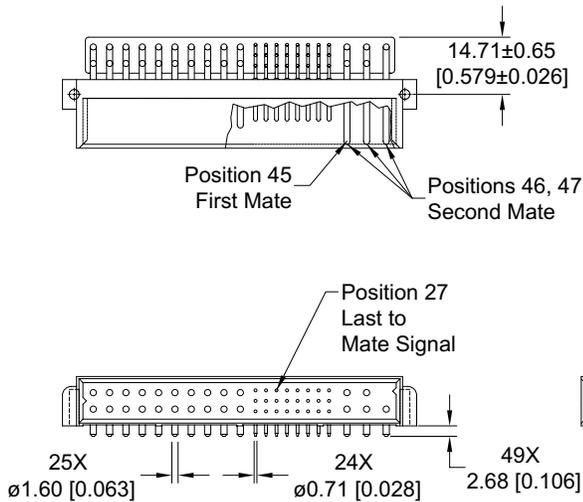


CONNECTOR DIMENSIONS

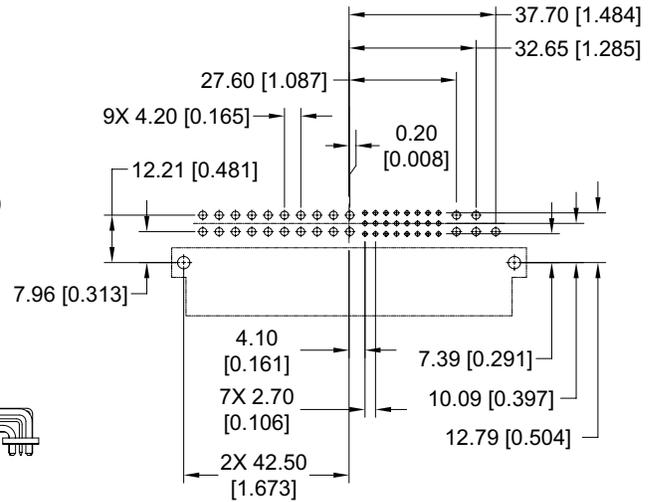

CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes.

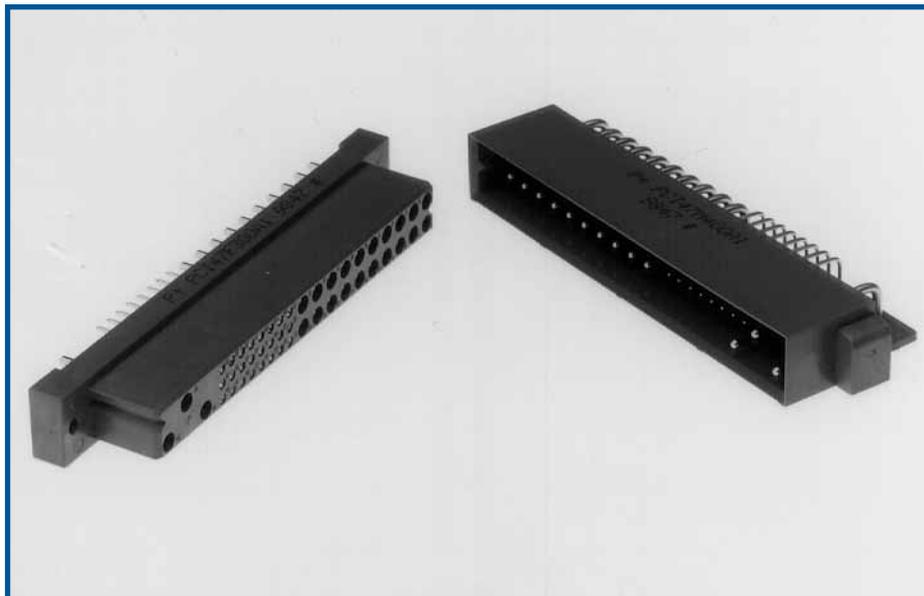

SUGGESTED PRINTED BOARD HOLE SIZES:

- Suggest Ø1.14 [0.045] holes for size 20 contact holes.
- Suggest Ø2.03 [0.080] holes for size 16 contact holes.
- Suggest Ø3.56±0.08 [0.140±0.003] holes for connector mounting holes.




**DIMENSIONS ARE IN MILLIMETERS [INCHES].
ALL DIMENSIONS ARE SUBJECT TO CHANGE.**



FEMALE PANEL MOUNT CRIMP CONTACT CONNECTORS CODE 8

CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

STANDARD PART NUMBER
PCIH38F8000

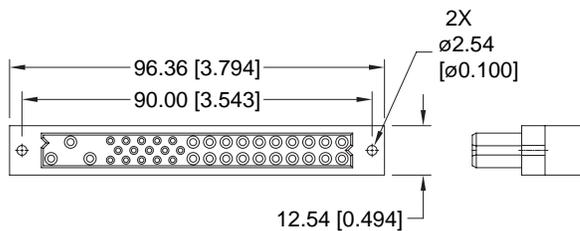
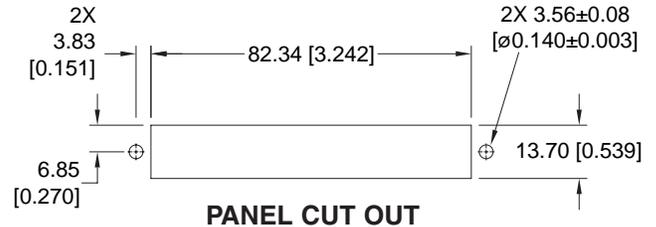
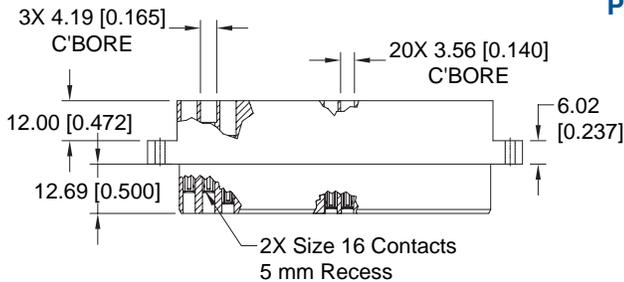


CONNECTOR DIMENSIONS

FEMALE PANEL MOUNT CRIMP CONTACT CONNECTORS CODE 8

CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

STANDARD PART NUMBER
PCIH47F8000

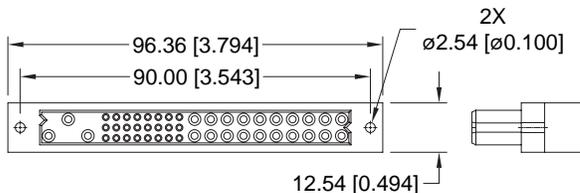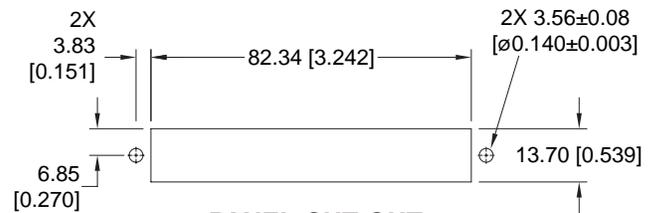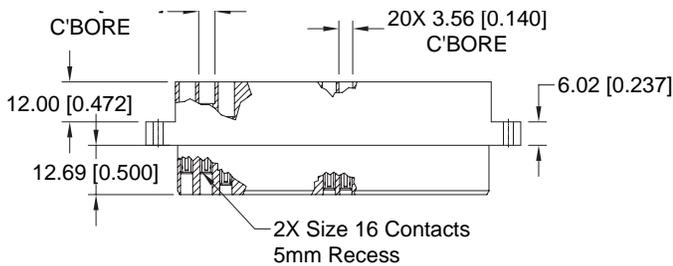

CONNECTOR DIMENSIONS


For information regarding removable contacts, see Removable Contact section, pages 102-103.

PCIH SERIES


FEMALE COMPLIANT PRESS-FIT CONNECTOR CODE 93 OR 94

STANDARD PART NUMBER

PCIH38F9300A1
PCIH38F9400A1

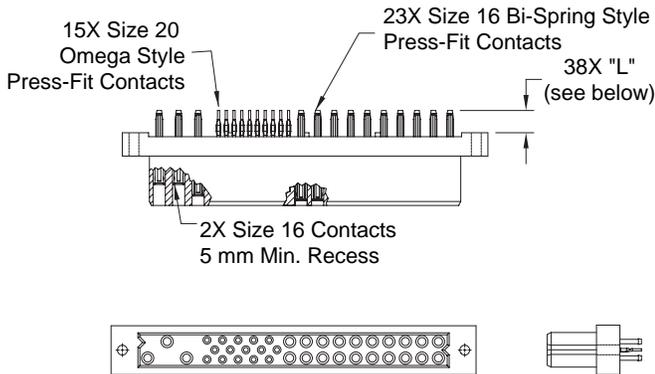

CONNECTOR DIMENSIONS

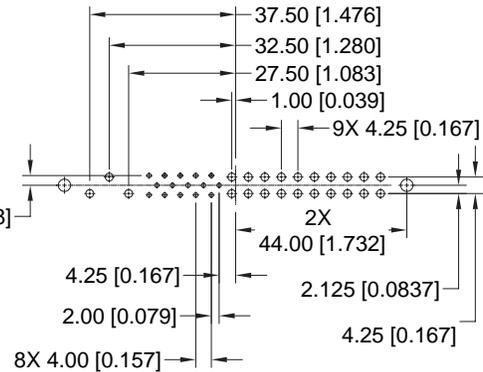

CONTACT HOLE PATTERN

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]


Note: See below for suggested printed board hole sizes, press-fit connector installation tools, and mounting screw options.

FEMALE COMPLIANT PRESS-FIT CONNECTOR WITH A.C. PASS-THROUGH CODE 93 OR 94 WITH MOS* -245.0


CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

HIGH PROFILE PART NUMBER

PCIH38F9300A1-245.0
PCIH38F9400A1-245.0

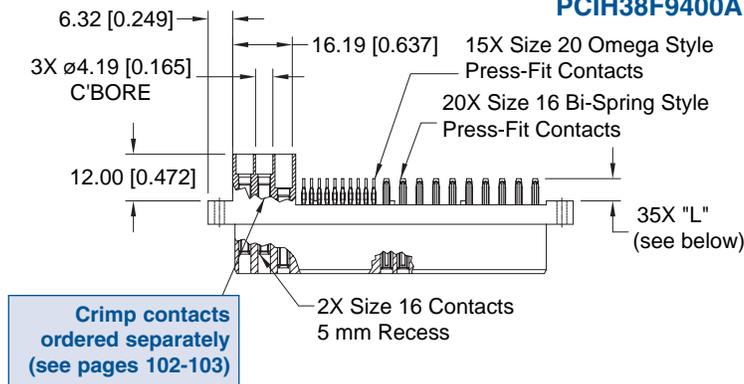


Crimp contacts ordered separately (see pages 102-103)



CONNECTOR DIMENSIONS

High Profile A.C.
Pass-Through,
Cutout

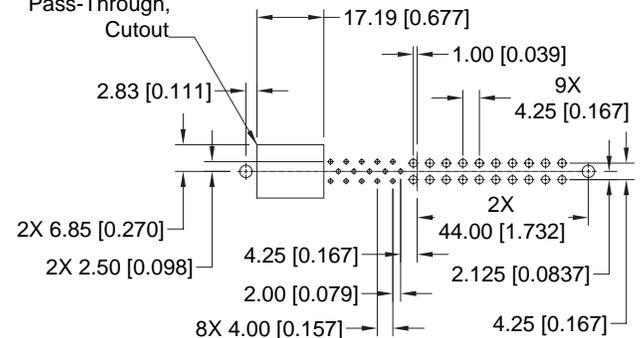

CONTACT HOLE PATTERN

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest $\text{Ø}3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.

NOTE: See page 110 for suggested printed board drill hole sizes, recommended plating and finished hole sizes for compliant contact termination positions.

For press-fit connector installation tools, see pages 108-109.

For mounting screw options, see page 108.

DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.



Positronic Industries
connectpositronic.com

COMPLIANT PRESS-FIT BOARD MOUNT CONNECTOR, FEMALE

Compact
Power
Connectors

FEMALE COMPLIANT PRESS-FIT CONNECTOR WITH A.C. PASS-THROUGH CODE 93 OR 94 WITH MOS* -246.1


CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

LOW PROFILE PART NUMBER


PCIH38F9300A1-246.1
PCIH38F9400A1-246.1

* For MOS descriptions,
see chart on pages 111-112.

PCIH SERIES

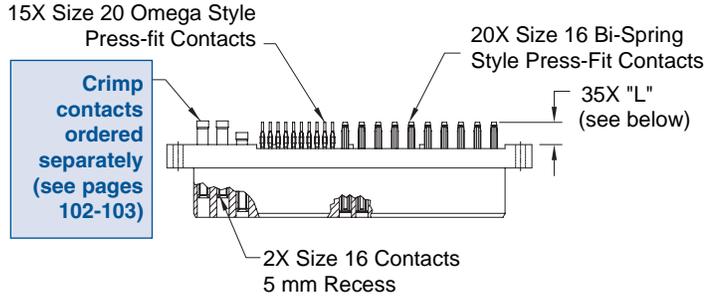


Crimp contacts ordered separately (see pages 102-103)



CONNECTOR DIMENSIONS

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]

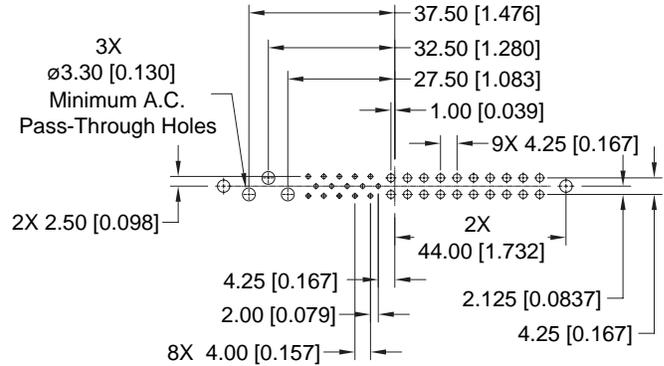



CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes, press-fit connector installation tools, and mounting screw options.

FEMALE COMPLIANT PRESS-FIT CONNECTOR CODE 93 OR 94


STANDARD PART NUMBER

PCIH47F9300A1
PCIH47F9400A1

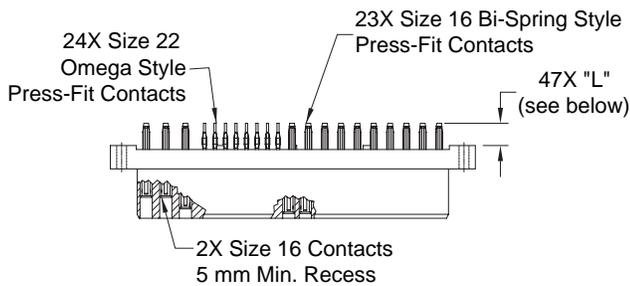

CONNECTOR DIMENSIONS

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]

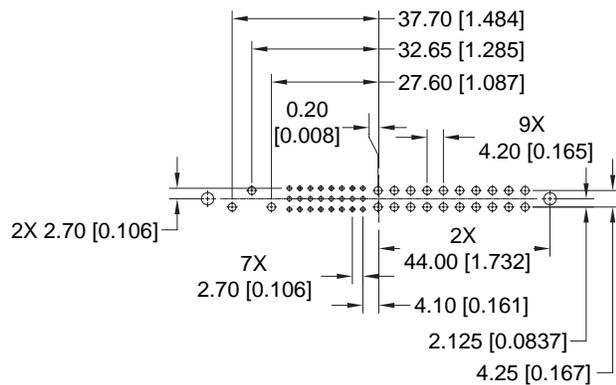

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest \varnothing 3.56 \pm 0.08 [0.140 \pm 0.003] holes for connector mounting holes.

NOTE: See page 110 for suggested printed board drill hole sizes, recommended plating and finished hole sizes for compliant contact termination positions.

For press-fit connector installation tools, see pages 108-109.

For mounting screw options, see page 108.



FEMALE COMPLIANT PRESS-FIT CONNECTOR WITH A.C. PASS-THROUGH CODE 93 OR 94 WITH MOS* -246.0

CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

LOW PROFILE PART NUMBER

PCIH47F9300A1-246.0
PCIH47F9400A1-246.0

* For MOS descriptions,
see chart on pages 111-112.

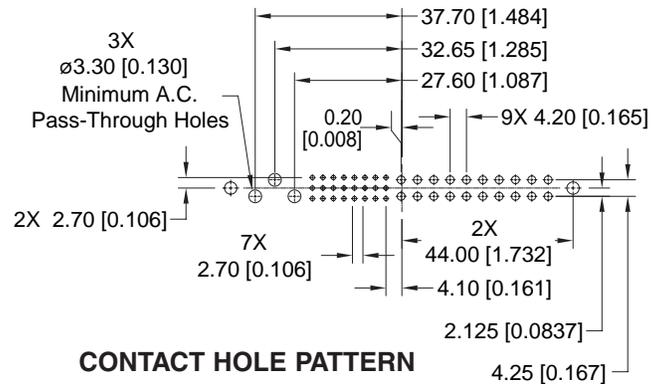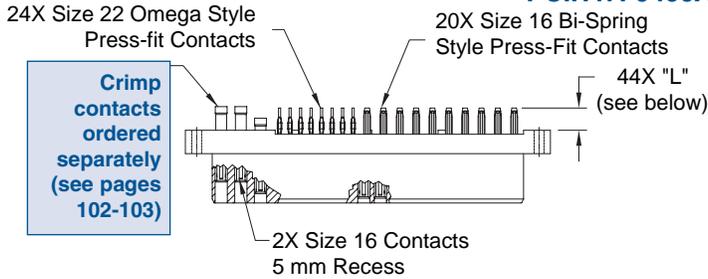

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]

Note: See below for suggested printed board hole sizes, press-fit connector installation tools, and mounting screw options.




FEMALE COMPLIANT PRESS-FIT CONNECTOR WITH A.C. PASS-THROUGH CODE 93 OR 94 WITH MOS* -246.3

CRIMP CONTACTS ARE NOT SUPPLIED WITH CONNECTOR AND MUST BE ORDERED SEPARATELY

LOW PROFILE PART NUMBER

PCIH49W25F9300A1-246.3
PCIH49W25F9400A1-246.3

* For MOS descriptions,
see chart on pages 111-112.

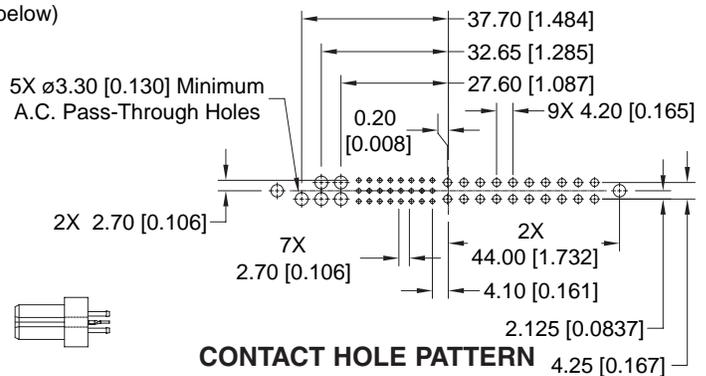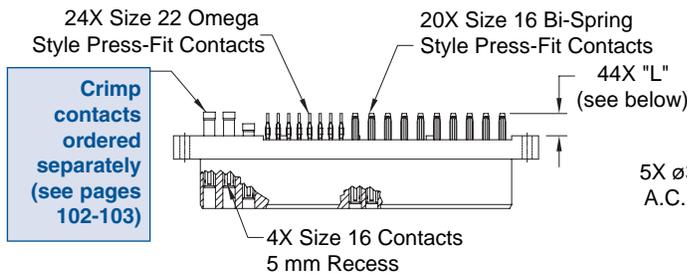

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest $\varnothing 3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.

NOTE: See page 110 for suggested printed board drill hole sizes, recommended plating and finished hole sizes for compliant contact termination positions.

For press-fit connector installation tools, see pages 108-109.

For mounting screw options, see page 108.

DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.



Positronic Industries
connectpositronic.com

COMPLIANT PRESS-FIT BOARD MOUNT CONNECTOR, FEMALE



Compact
Power
Connectors

FEMALE COMPLIANT PRESS-FIT CONNECTOR CODE 93 OR 94 WITH MOS* -379.0

STANDARD PART NUMBER
PCIH49W25F9300A1-379.0
PCIH49W25F9400A1-379.0

* For MOS descriptions,
see chart on pages 111-112.

PCIH SERIES

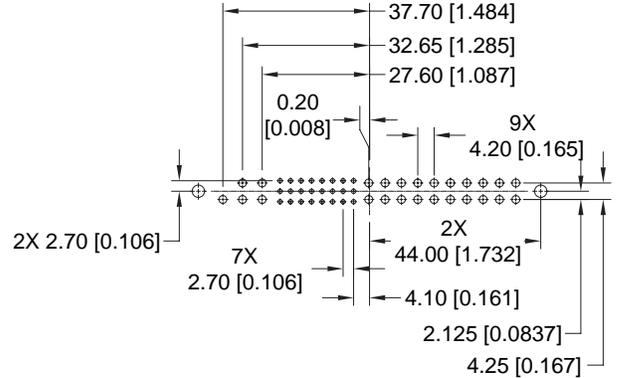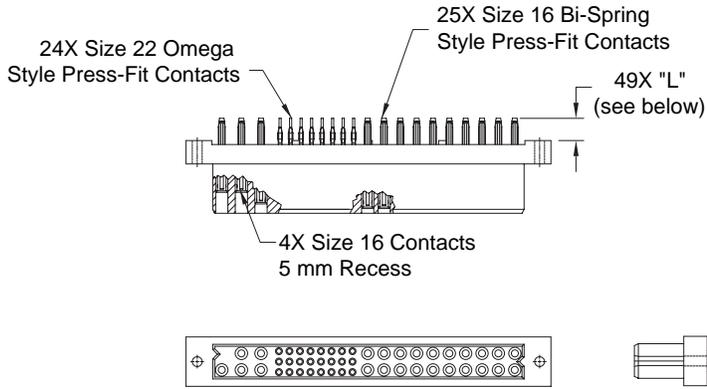


CONNECTOR DIMENSIONS

CONTACT HOLE PATTERN

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]



SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest $\varnothing 3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.
NOTE: See page 110 for suggested printed board drill hole sizes, recommended plating and finished hole sizes for compliant contact termination positions.
 For press-fit connector installation tools, see pages 108-109.
 For mounting screw options, see page 108.

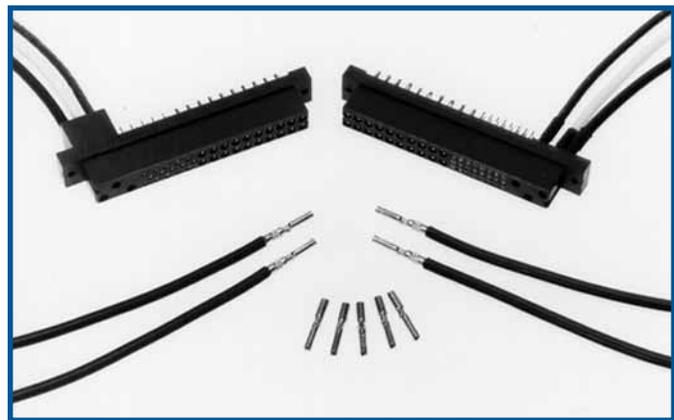

MALE COMPLIANT PRESS-FIT CONNECTOR CODE 93 OR 94

STANDARD PART NUMBER
PCIH38M9300A1
PCIH38M9400A1

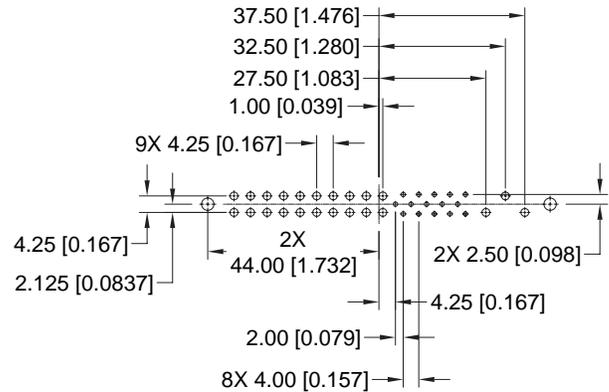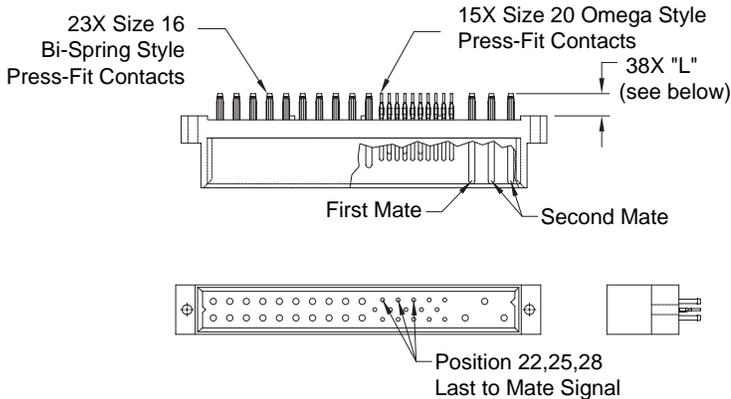

CONNECTOR DIMENSIONS



CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]

CONTACT HOLE PATTERN

Note: See below for suggested printed board hole sizes, press-fit connector installation tools, and mounting screw options.

MALE COMPLIANT PRESS-FIT CONNECTOR CODE 93 OR 94

STANDARD PART NUMBER
PCIH47M9300A1
PCIH47M9400A1

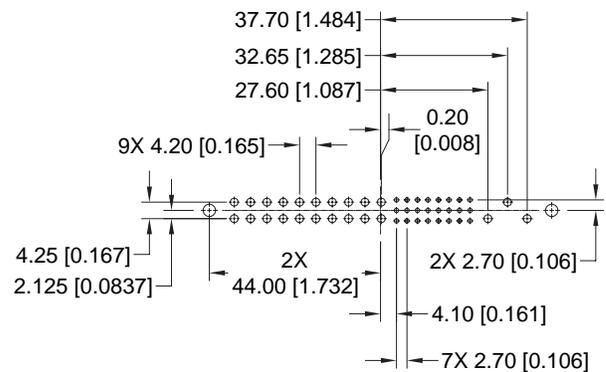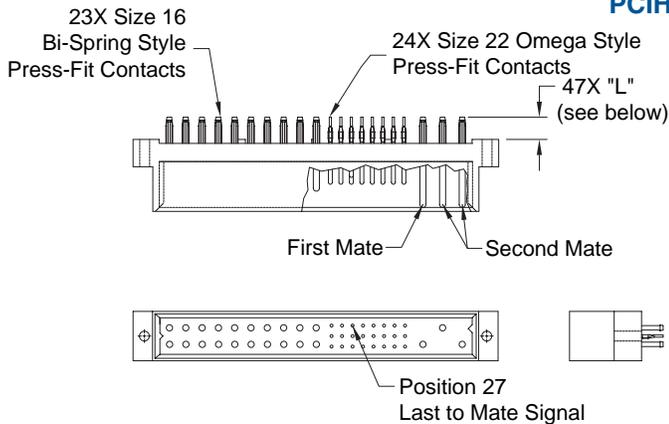

CONNECTOR DIMENSIONS

CONTACT TAIL LENGTH		
Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]

CONTACT HOLE PATTERN

SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest $\varnothing 3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.

NOTE: See page 110 for suggested printed board drill hole sizes, recommended plating and finished hole sizes for compliant contact termination positions.

For press-fit connector installation tools, see pages 108-109.

For mounting screw options, see page 108.

DIMENSIONS ARE IN MILLIMETERS (INCHES).
ALL DIMENSIONS ARE SUBJECT TO CHANGE.



Positronic Industries
connectpositronic.com

COMPLIANT PRESS-FIT BOARD MOUNT CONNECTOR, MALE



Compact
Power
Connectors

MALE COMPLIANT PRESS-FIT CONNECTOR CODE 93 OR 94 WITH MOS* -378.0

STANDARD PART NUMBER
PCIH49W25M9300A1-378.0
PCIH49W25M9400A1-378.0

* For MOS descriptions,
see chart on pages 111-112.

PCIH SERIES

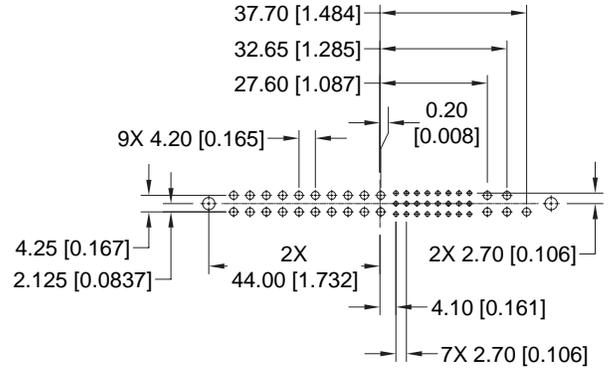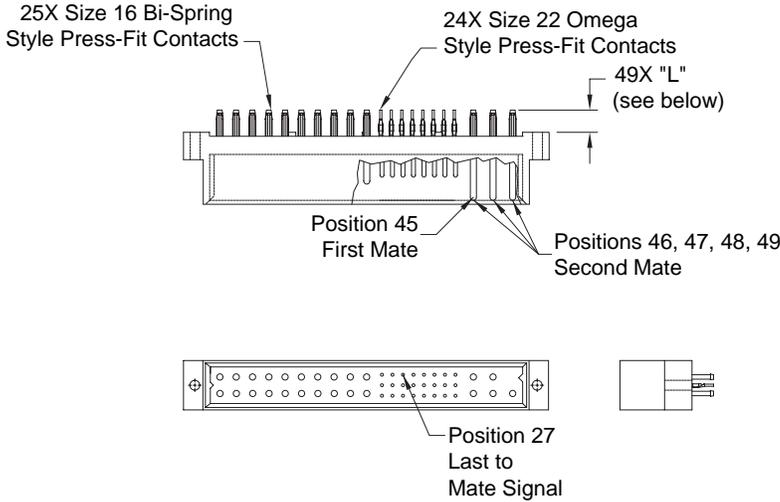

CONTACT HOLE PATTERN

CONNECTOR DIMENSIONS

CONTACT TAIL LENGTH

Code	"L" Length	Board Thickness
93	5.72 [0.225]	2.29 to 4.45 [0.090 to 0.175]
94	7.04 [0.277]	4.45 min. [0.175 min.]


SUGGESTED PRINTED BOARD HOLE SIZES:

Suggest $\varnothing 3.56 \pm 0.08$ [0.140 \pm 0.003] holes for connector mounting holes.

NOTE: See page 110 for suggested printed board drill hole sizes, recommended plating and finished hole sizes for compliant contact termination positions.

For press-fit connector installation tools, see pages 108-109.

For mounting screw options, see page 108.



ENLARGED DETAIL OF COMPLIANT
CONTACT TERMINATIONS



ORDERING INFORMATION - CODE NUMBERING SYSTEM

Specify Complete Connector By Selecting An Option From Step 1 Through 7

STEP	1	2	3	4	5	6	7	8	9
EXAMPLE	PCIH	47	F	93	0	0	A1	/AA	

STEP 1 - BASIC SERIES

PCIH - PCIH Series

STEP 2 - CONNECTOR VARIANTS

- 38 - 23 size 16 contacts and 15 size 20 contacts
- 38R - 23 size 16 contacts and 15 size 20 contacts inverted termination style, use with contact type "4"
- 47 - 23 size 16 contacts and 24 size 22 contacts
- 47R - 23 size 16 contacts and 24 size 22 contacts inverted termination style, use with contact type "4"
- 49W25 - 25 size 16 contacts and 24 size 22 contacts
- *49W25R - 25 size 16 contacts and 24 size 22 contacts inverted termination style, use with contact type "4"

STEP 3 - CONNECTOR GENDER

- F - Female
- M - Male

STEP 4 - CONTACT TERMINATION TYPE

- 3 - Solder, Straight Printed Board Mount with 4.50 [0.177] tail extension for connection systems 1 and 2.
- 4 - Solder, Right Angle (90°) Printed Board Mount with 2.68 [0.106] tail extension for connection systems 1, 2, 3 and 4.
- ** 8 - Contacts must be ordered separately for Panel Mount Cable Connectors, connection system 3, see pages 102-103. Female connector only.
- 93 - Press-Fit, Compliant Termination size 16 and size 20 or size 22 Straight Printed Board Mount for use with board thicknesses of 2.29 to 4.45 [0.090 to 0.175]. Connection systems 1 and 2.
- 94 - Press-Fit, Compliant Termination size 16 and size 20 or size 22 Straight Printed Board Mount for use with board thickness of 4.45 minimum [0.175 minimum]. Connection systems 1 and 2.

STEP 5 - MOUNTING STYLE

- 0 - Not Applicable
- See page 108 for mounting screw options.

STEP 6 - HOODS

- 0 - Not applicable

STEP 9 - SPECIAL OPTIONS

FOR LISTING OF SPECIAL OPTIONS, SEE SPECIAL OPTIONS APPENDIX ON PAGES 111 AND 112.

STEP 8 - ENVIRONMENTAL COMPLIANCE OPTIONS

- /AA - Compliant per EU Directive 2002/95/EC (RoHS)


NOTE: If compliance to environmental legislation is not required, this step will not be used. Example: PCIH47F9300A1




STEP 7 - CONTACT PLATING FOR PRINTED BOARD TYPE CONNECTORS

- 0 - Crimp contacts ordered separately
- A1 - Gold flash over nickel on mating end and termination end.
- A2 - Gold flash over nickel on mating end and 5.00 microns [0.00020 inch] tin-lead solder coat on termination end. Not available with code 93 or code 94 in step 4.
- C1 - 0.76 microns [0.000030 inch] gold over nickel on mating end and termination end.
- C2 - 0.76 microns [0.000030 inch] gold over nickel on mating end and 5.00 microns [0.00020 inch] tin-lead solder coat on termination end. Not available with code 93 or code 94 in step 4.
- D1 - 1.27 microns [0.000050 inch] gold over nickel on mating end and termination end.
- D2 - 1.27 microns [0.000050 inch] gold over nickel on mating end and 5.00 microns [0.00020 inch] tin-lead solder coat on termination end. Not available with code 93 or code 94 in step 4.

NOTE: Once you have made a connector selection, contact Technical Sales if you would like to receive a drawing in DXF, PDF format or a 3-dimensional IGES file.



SK Drawing



3-dimensional model

* Female contact variants are readily available. Contact Technical Sales for availability of male contact variants.
** Available for 38 and 47 variants. Contact Technical Sales for availability of 49W25 variant.