
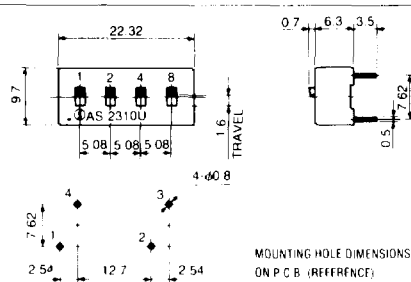


High Frequency Attenuators

AS2310



(Slide switch type)



MOUNTING HOLE DIMENSIONS
ON P.C.B. (REFERENCE)

AS2710


(Slide switch type)

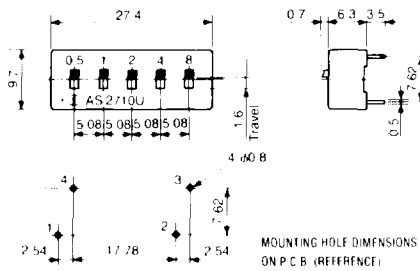

MOUNTING HOLE DIMENSIONS
ON P.C.B. (REFERENCE)



AS2114

(Slide switch type)

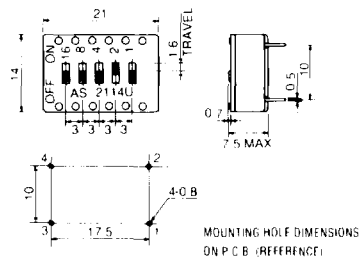


MOUNTING HOLE DIMENSIONS
ON P.C.B. (REFERENCE)

ADR352

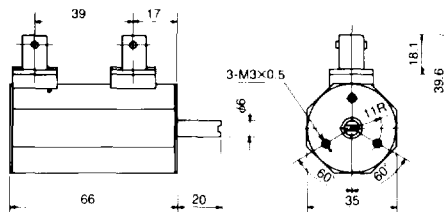



ADR255

(For oscilloscopes)

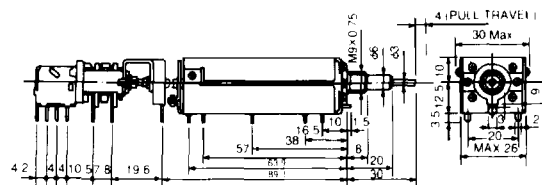

Programmable High Frequency Attenuators

APR2301

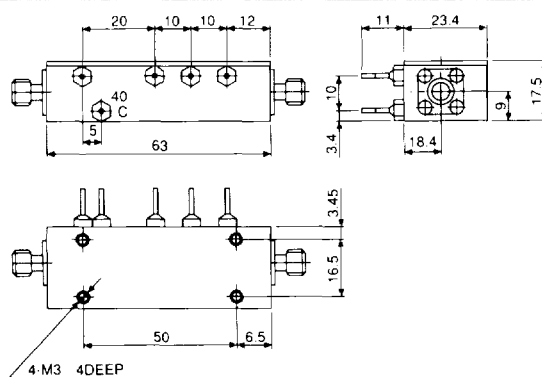

Impedance	600Ω ±2.5% unbalanced T
Attenuation	Combination of 1, 2, 4, 8dB: 15dB total
Frequency	DC-150kHz
Rated Power	50mW

Patent pending

Impedance	600Ω ±2.5% unbalanced T
Attenuation	Combination of 0.5, 1, 2, 4, 8dB: 15.5dB total Combination of 1, 2, 4, 8, 16dB: 31dB total
Frequency	DC-150kHz
Rated Power	50mW

Patent pending

Impedance	600Ω ±2.5% balanced O 600Ω ±2% unbalanced T
Attenuation	Combination of 0.5, 1, 2, 4, 8dB: 15.5dB total Combination of 1, 2, 4, 8, 16dB: 31dB total
Frequency	DC-150kHz
Rated Power	50mW

Also available Pull Switch type.

Impedance	50Ω, 75Ω
Attenuation	0 to 100dB (50Ω, 11 steps) 0 to 80dB (75Ω, 9 steps) (0.1dB, 1dB steps also possible)
Operating Frequency Range	DC to 1.5GHz (50Ω) DC to 1.0GHz (75Ω)
Rated Power	500mW
VSWR	1.1 max.: 1GHz (50Ω) 1.2 max.: 1.5GHz (50Ω)
Connector	50Ω BNC, SMA 75Ω BNC, KC

Operating Frequency	DC-35, 50, 100, 200MHz
Attenuation Ratio	1/1000-1/1
Input Impedance	1MΩ
Input Capacitance	5.5-22 pF
Step Angle	30°

Please consult us for other configurations.

Impedance	50Ω
Attenuation	10, 20, 20 and 20dB step combined to 70dB max. 1, 2, 4 and 8dB step combined to 15dB
Frequency	DC-2GHz (50Ω)
Rated Power	500mW

- Specifications in this catalog are presented basically for informative purposes.
We request the exchange of official approval drawings before placing order.