


# SMD LED

## 0805, Super-Red

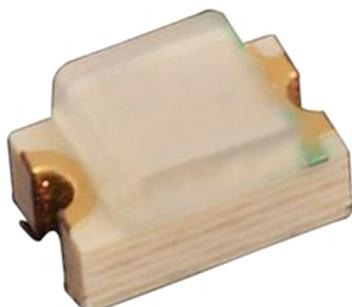

### Specifications:

Dice material	: GaAlAs
Emitted colour	: Super Red
Epoxy colour	: Water Clear
Peak wavelength	: 660nm
Viewing angle	: 140°
Luminous intensity (IV)	: 17mcd

### Absolute Maximum Ratings (T<sub>a</sub> = 25°C)

Reverse Voltage	5V
Reverse Current	10µA (V <sub>R</sub> = 5V)
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +100°C
Lead Soldering Temperature Range 1.6mm (1/16 inch) from body	260°C for 5 Seconds

### Electrical/Optical Characteristics at T<sub>a</sub> = 25°C


Parameter	Symbol	Minimum	Typical	Maximum	Unit	Test
Luminous Intensity	IV	14	17	20	mcd	IF = 20mA
Viewing Angle	2θ 1/2	-	140	-	degrees	
Peak Emission Wavelength	λP	-	660	-	nm	-
Dominant Wavelength	λD	-	643	-		-
Spectral Line Half-Width	Δλ	-	20	-		-
Forward Voltage	VF	1.5	1.85	2.4	V	IF = 20mA
Power Dissipation	Pd	-	-	100	-	-
Peak Forward Current (Duty 1/10 at 1KHz)	IF (Peak)	-	-	120	-	-
Recommended Operating Current	IF (Rec)	-	20	-	mA	-

# SMD LED


## 0805, Super-Red




Super Red (GaAlAs)  $\lambda_P = 660\text{nm}$

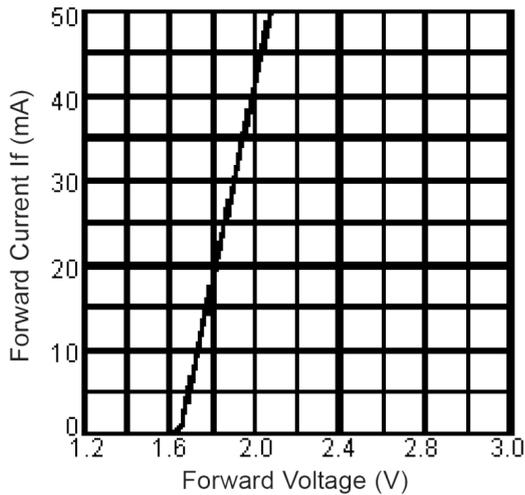


Forward Current vs. Forward Voltage

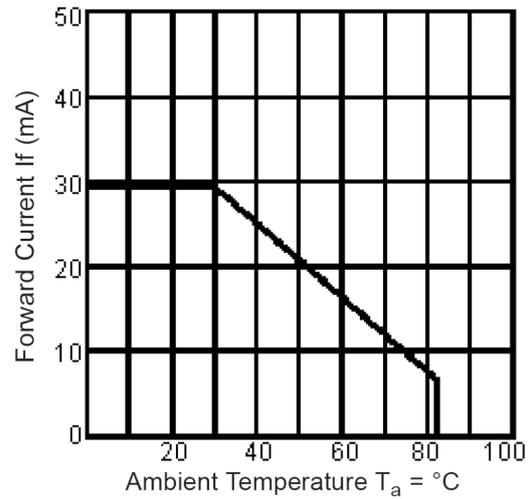

Forward Current Derating Curve

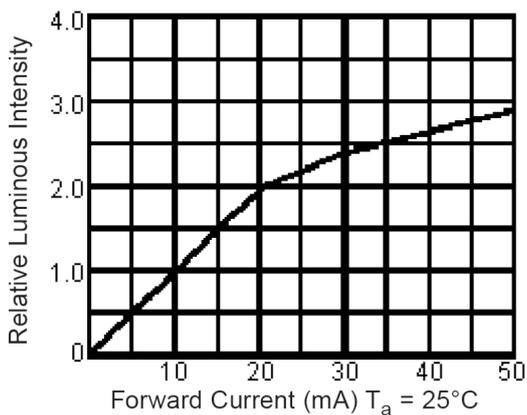

Luminous Intensity vs. Forward Current

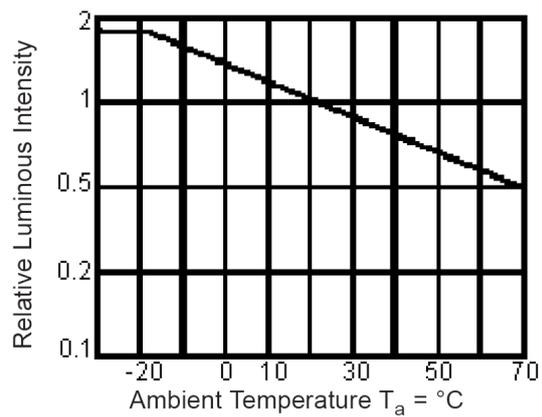

Luminous Intensity vs. Ambient Temperature

