


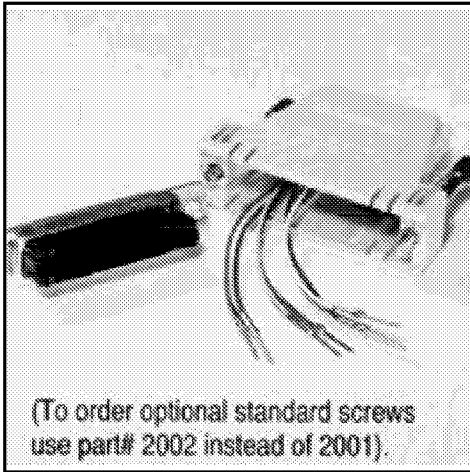

2001-[\*]-[\*\*] (Plastic type)

2001MT-[\*]-[\*\*] (Metalized plastic type)

\*RJ-Size; options are:

4 = 6P4C (6 positions, 4 contacts)

6 = 6P6C (6 positions, 6 contacts)

8 = 8P8C (8 positions, 8 contacts)

\*\* Gender; Options are:


**M** = male **F** = female

## ELECTRICAL:

- Current rating: Modular jack 1.5 AMP  
D-Subminiature .5 AMP
- Insulation resistance: Modular jack 500 Megohms minimum  
D-Subminiature 1000 Megohms minimum
- Dielectric withstanding voltage: Modular jack 1000 VAC  
D-Subminiature 1000VAC
- Contact resistance: Modular jack 15 milliohms maximum  
D-Subminiature 15 milliohms maximum

## MATERIAL:

- Housing: UL94V-0 / PBT glass filled
- Conductor: phosphor bronze
- Finish: 6μ" hard gold plating on contact area over 50μ" nickel underplate
- Standard with thumbscrews
- Pre-wired to your design or kit styles

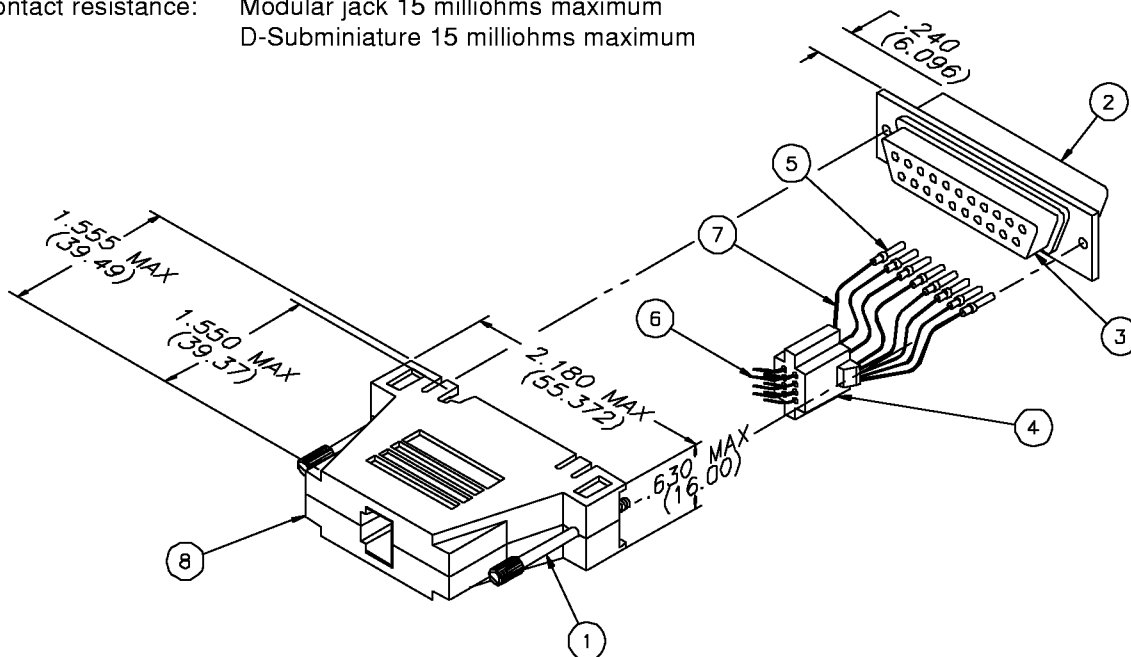

|      |                |                                                                   |     |
|------|----------------|-------------------------------------------------------------------|-----|
| 8    | HOOD           | NORYL PS1005 & R190 & H225<br>(Available MT - ABS Nickel Plating) | 1   |
| 7    | LEAD WIRE      | BRASS (0.16 x 7 STRAND, UL061)                                    | 8   |
| 6    | SPRING WIRE    | PHOSPHOR BRONZE 6u" HARD GOLD PLATING, OVER NICKEL                | 8   |
| 5    | CRIMP TERMINAL | PHOSPHOR BRONZE 6u" HARD GOLD PLATING, OVER NICKEL                | 8   |
| 4    | INSERT         | NORYL PS1005 & R190 & H225                                        | 1   |
| 3    | HOUSING        | P.B.T. PLASTIC                                                    | 1   |
| 2    | SHELL          | LOW CARBON STEEL, TIN PLATED                                      | 1   |
| 1    | SCREW          | SAE 1010, NICKEL PLATED                                           | 2   |
| ITEM | DESCRIPTION    | MATERIAL                                                          | QTY |