










Nominal diameter	Withdraw. force	Rated current	Contact resistance	Type	Part No.
2 mm	–	10 A	0.6 mΩ	KB 2-10	24.0051
<p>Female jumper 2 mm (.080 in) dia. socket spacing 10 mm (.394 in), specially shaped MC®-Multilam™, gold plated, polyamide insulated.</p> <p>Colors: 1, 2, 5, 8</p>				  	2:1
2 mm	–	10 A	0.6 mΩ	KS 2-5.08 L S-KS 2-5.08 L	24.0040 24.5042 (without insulation)
<p>Male jumper 2 mm (.080 in) dia., plug spacing 5.08 mm (.200 in) one piece machined brass, bent, gold plated, with MC®-Multilam™, polyamide insulated. Matches 2 mm (.080 in) dia. sockets and jacks.</p> <p>Color: 3</p>				  	1.5:1
2 mm	–	10 A	0.6 mΩ	KS 2-5.08 L/1	24.0046
<p>Male jumper 2 mm (.080 in) dia., plug spacing 5.08 mm (.200 in) one piece machined brass, bent, gold plated, with MC®-Multilam™, polyamide insulated. Matches 2 mm (.080 in) dia. sockets and jacks.</p> <p>Color: 3</p>				 	1.5:1

Part No.	Type	Nominal diameter	Withdraw. force	Rated current	Contact resistance
----------	------	------------------	-----------------	---------------	--------------------

24.0042 KS 2-10 L



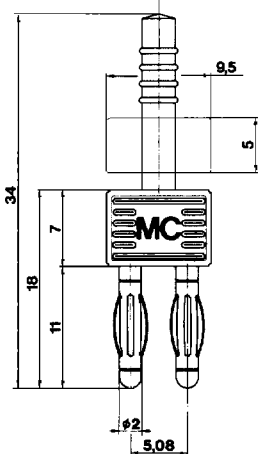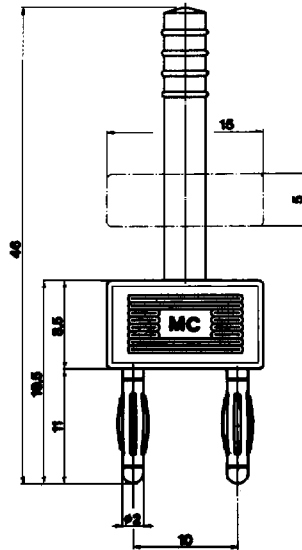
2 mm - 10 A 0.6 mΩ

Male jumper 2 mm (.080 in) dia., Plug spacing 10 mm (.394 in). One piece machined brass, gold plated with MC®-Multilam™. Polyamide insulated. Matches 2 mm (.080 in) dia. sockets and jacks.

Color: 3



24.5045 (without insulation)

S-KS 2-10 L



1:1

24.0043 KS 2-10 L/1

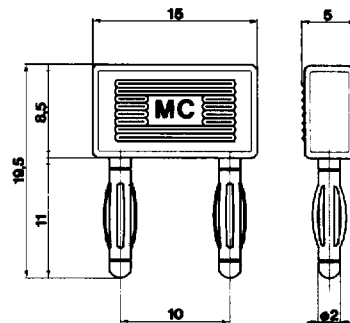

2 mm - 10 A 0.6 mΩ

Male jumper 2 mm (.080 in) dia., plug spacing 10 mm (.400 in), one piece machined brass, gold plated, with MC®-Multilam™. Polyamide insulated. Matches 2 mm (.080 in) dia. sockets and jacks.

Color: 3

1.2:1

0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet