


RoHS

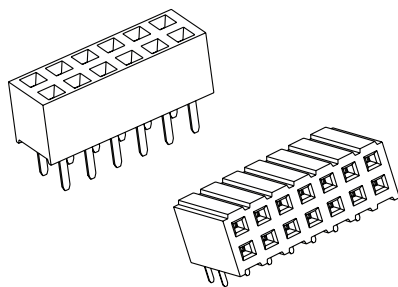

K200SV2X/K200SR2X Series 2.0MM Pin Header SMD Type

Features

- Dual row Surface mount Header
- 0.079" spacing for real estate savings
- Multiple stack height options
- Circuit sizes range from 4-80

Performance Specifications

Material and Finish

Insulator: High Temp plastic (UL94V-0)

Color : Ivory

Contact : Copper Alloy

Plated : Gold Plated

Electrical Characteristics

Current Rating : 2.0A AC/DC




Voltage Rating : 250V AC/DC

Resistance : 20m ohm.max.

Insulation Resistance : 1000M ohm.Min.

Withstanding Voltage : 500V AC for one minute

Operating Temperature Range : -40°C to +105°C

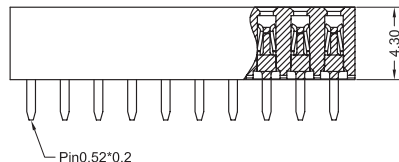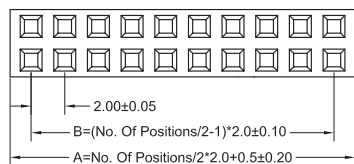


2.0MM Pin Header SMD Type K200SV2X/K200SR2 Series

Documentation & Ordering Information

Kycon Part #

Part Number Builder



Series

K200SV2X - 2.0mm

K200SR2X - 2.0mm


Number of Contacts

	A	B		A	B
04	4.50	2.00	44	44.50	42.00
06	6.50	4.00	46	46.50	44.00
08	8.50	6.00	48	48.50	46.00
10	10.50	8.00	50	50.50	48.00
12	12.50	10.00	52	52.50	50.00
14	14.50	12.00	54	54.50	52.00
16	16.50	14.00	56	56.50	54.00
18	18.50	16.00	58	58.50	56.00
20	20.50	18.00	60	60.50	58.00
22	22.50	20.00	62	62.50	60.00
24	24.50	22.00	64	64.50	62.00
26	26.50	24.00	66	66.50	64.00
28	28.50	26.00	68	68.50	66.00
30	30.50	28.00	70	70.50	68.00
32	32.50	30.00	72	72.50	70.00
34	34.50	32.00	74	74.50	72.00
36	36.50	34.00	76	76.50	74.00
38	38.50	36.00	78	78.50	76.00
40	40.50	38.00	80	80.50	78.00
42	42.50	40.00			

Plating

G - Gold

Contact Kycon for more options

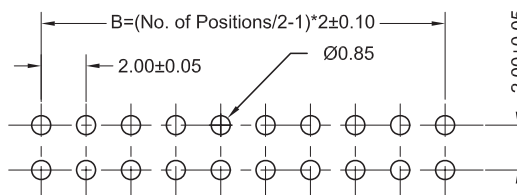

PCB Layout