



ACCUTEK MICROCIRCUIT CORPORATION

AK63264W/AK63264Z 64K x 32 SRAM MODULE

DESCRIPTION

The Accuthek AK63264 SRAM Module consists of fast high performance SRAMs mounted on a low profile, 64 pin SIM or ZIP Board. The module utilizes four 28 pin 64K x 4 SRAMs in SOJ packages and four decoupling capacitors on each side of a printed circuit board.

The SRAMs used have common I/O functions and single output enable functions. Also, four separate chip select (CE) connections are used to independently enable the four bytes. The modules can be supplied in a variety of access time values from 12 nSEC to 45 nSEC in CMOS or BiCMOS technology.


The Accuthek module is designed to have a maximum seated height of 0.600 inch SIM or 0.500 inch ZIP to provide for the lowest height off the board. By offset-mounting the back surface SRAMs on the SIM version the module can be mounted in either angled or straight-up SIM sockets. Each conforms to JEDEC - standard sizes and pin-out configurations. Using two pins for module memory density identification, PD₀ and PD₁, minimizes interchangeability and design considerations when changing from one module size to the other in customer applications.

FEATURES


- 65,536 x 32 bit organization
- JEDEC Standard 64 pin SIM or ZIP format
- Common I/O, single $\overline{OE}$ functions with four separate chip selects (CE)
- Low height, 0.600 inch SIM or 0.500 inch ZIP maximum

Front View

64-Pin SIM



64-Pin ZIP

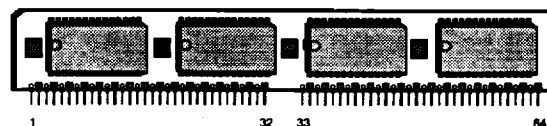

- Upward compatible with 128K x 32 (AK632128), 256K x 32 (AK632256) and 1 Meg x 32 (AK6321024) designs
- Presence Detect, PD₀ and PD₁ for identifying module density
- Fast Access Times range from 12 nSEC BiCMOS to 45 nSEC CMOS
- TTL-compatible inputs and outputs
- Single +5 Volt ($\pm 10\%$) power supply
- Operating temperature range in free air, 0°C to 70°C

ELECTRICAL SPECIFICATIONS

Timing diagrams and basic electrical characteristics are those of the standard 64K x 4 SRAMs used to construct these modules. Accuthek's module design allows the flexibility of selecting industry-compatible 64K x 4 SRAMs from at least seven semiconductor manufacturers.

PIN NOMENCLATURE


A ₀ - A ₁₅	Address Inputs
$\overline{CE}_1$ - $\overline{CE}_4$	Chip Enable
DQ ₁ - DQ ₃₂	Data In/Data Out
$\overline{OE}$	Output Enable
PD ₀ - PD ₁	Presence Detect
V _{cc}	5v Supply
V _{ss}	Ground
$\overline{WE}$	Write Enable

PIN ASSIGNMENT

PIN #	SYMBOL	PIN #	SYMBOL	PIN #	SYMBOL	PIN #	SYMBOL
1	V _{ss}	17	A ₂	33	$\overline{CE}_4$	49	A ₄
2	PD ₀	18	A ₉	34	$\overline{CE}_3$	50	A ₁₁
3	PD ₁	19	DQ ₁₃	35	NC	51	A ₆
4	DQ ₁	20	DQ ₅	36	NC	52	A ₁₂
5	DQ ₉	21	DQ ₁₄	37	$\overline{OE}$	53	V _{cc}
6	DQ ₂	22	DQ ₈	38	V _{ss}	54	A ₁₃
7	DQ ₁₀	23	DQ ₁₅	39	DQ ₂₅	55	A ₈
8	DQ ₃	24	DQ ₇	40	DQ ₁₇	56	DQ ₂₁
9	DQ ₁₁	25	DQ ₁₈	41	DQ ₂₈	57	DQ ₂₉
10	DQ ₄	26	DQ ₆	42	DQ ₁₈	58	DQ ₂₂
11	DQ ₁₂	27	V _{ss}	43	DQ ₂₇	59	DQ ₃₀
12	V _{cc}	28	$\overline{WE}$	44	DQ ₁₉	60	DQ ₂₃
13	A ₀	29	A ₁₅	45	DQ ₂₈	61	DQ ₃₁
14	A ₇	30	A ₁₄	46	DQ ₂₀	62	DQ ₂₄
15	A ₁	31	$\overline{CE}_2$	47	A ₃	63	DQ ₃₂
16	A ₈	32	$\overline{CE}_1$	48	A ₁₀	64	V _{ss}

PD₀ = Open
PD₁ = V_{ss}

FUNCTIONAL DIAGRAM

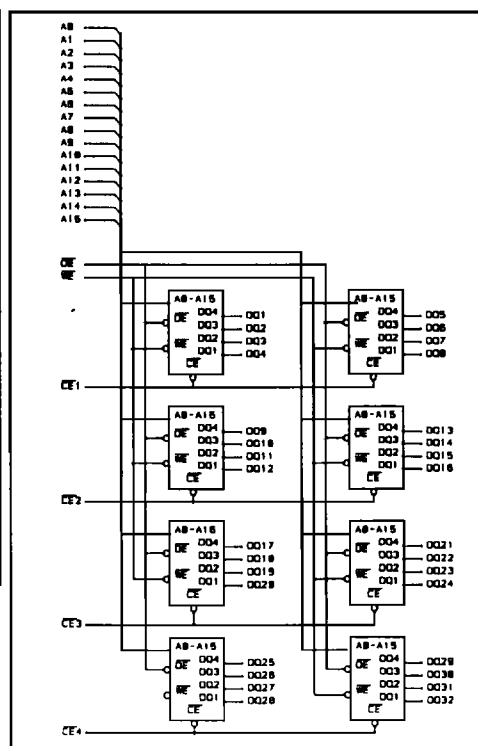

MODULE OPTIONS

Leadless SIM:	AK63264W
Leaded SIP:	AK63264G
Leaded ZIP:	AK63264Z

ORDER INFORMATION

PART NUMBER CODING INTERPRETATION

Position

1 2 3 4 5 6 7 8

1 Product

AK = Accuthek Memory

2 Type

4 = Dynamic RAM
5 = CMOS Dynamic RAM
6 = Static RAM

3 Organization/Word Width

1 = b y 1 16 = by 16
4 = by 4 32 = by 32
8 = by 8 36 = by 36
9 = by 9

4 Size/Bits Depth

64 = 64K 4096 = 4 MEG
256 = 256K 8192 = 8 MEG
1024 = 1 MEG 16384 = 16 MEG

5 Package Type

G = Single In-Line Package (SIP)
S = Single In-Line Module (SIM)
D = Dual In-Line Package (DIP)
W = .050 inch Pitch Edge Connect
Z = Zig-Zag In-Line Package (ZIP)

6 Special Designation

P = Page Mode
N = Nibble Mode
K = Static Column Mode
W = Write Per Bit Mode
V = Video Ram

7 Separator

- = Commercial 0°C to +70°C
M = Military Equivalent Screened
(-55°C to +125°C)
I = Industrial Temperature Tested
(-45°C to +85°C)
X = Burned In

8 Speed (first two significant digits)

DRAMS		SRAMS	
60	= 60 nS	12	= 12 nS
70	= 70 nS	20	= 20 nS
80	= 80 nS	25	= 25 nS
10	= 100 nS	35	= 35 nS

The numbers and coding on this page do not include all variations available but are shown as examples of the most widely used variations. Contact Accuthek if other information is required.


EXAMPLES:

AK63264W-25

64K x 32, 25 nSEC SRAM Module, SIM Configuration

AK63264Z-12

64K x 32, 12 nSEC SRAM Module, ZIP Configuration



ACCUTEK MICROCIRCUIT CORPORATION
BUSINESS CENTER at NEWBURYPORT
2 NEW PASTURE ROAD, SUITE 1
NEWBURYPORT, MA 01950-4054
PHONE: 508-465-6200 FAX: 508-462-3396

MECHANICAL DIMENSIONS

Inches

