



Peel-A-Way® Single In-line Adapters



Terminal Type -79 Shown

Terminal Information

Features:

- Peel away terminal carrier after soldering.
- Disposable terminal carrier.
- Complete soldering visibility on both sides of PCB.
- Maximum air flow.
- Better flux rinse.
- Low profile.
- Design allows for stacking on .100" (2.54 mm) grid.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16



Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel

Body Material:

KSA - Polyimide Film

Temp. range -269°C to 400°C (-452°F to 752°F)

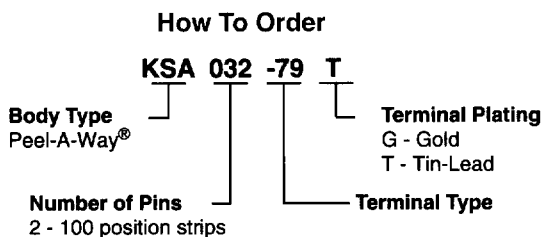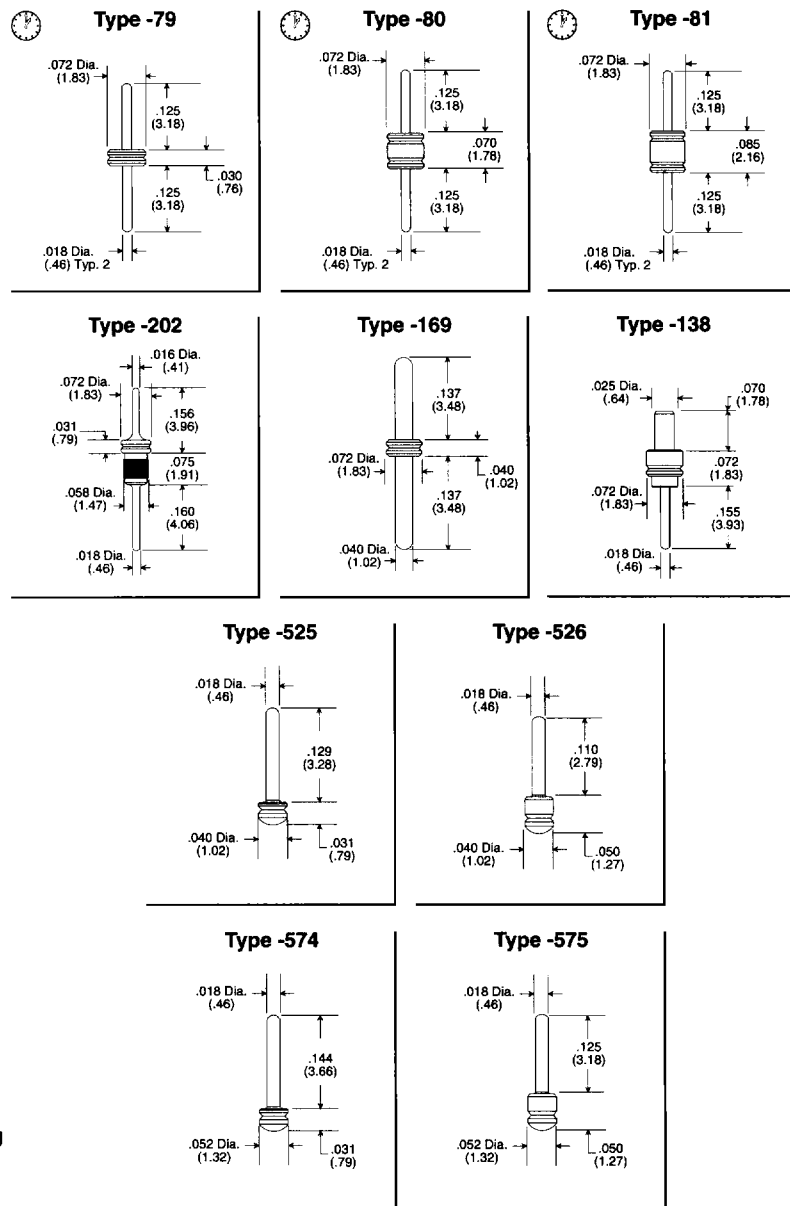

Quick turn delivery available on standard terminal types.

Additional terminal types available.

See terminal section for detailed terminal information.