

SPECIFICATIONS

Power Choke


Feature

- Ultra low cost.
- Very low resistance
- High frequency range up to 1.0MHz.

T / H Type

Electrical


- Operating Current: 12A
- Operating Temperature: -20 to 105
- Tolerance of Inductance: ±20%
- Saturation Current: | L|/L0 20%
- Temperature Rise Current: The Value of DC Current When T<40

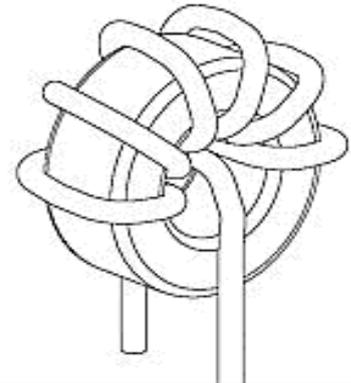

Applications

- Motherboards For Laptop and desktop computers.
- DC/DC converter in distributed power systems or VRM
- Inductor for general purpose use.

DRAWING

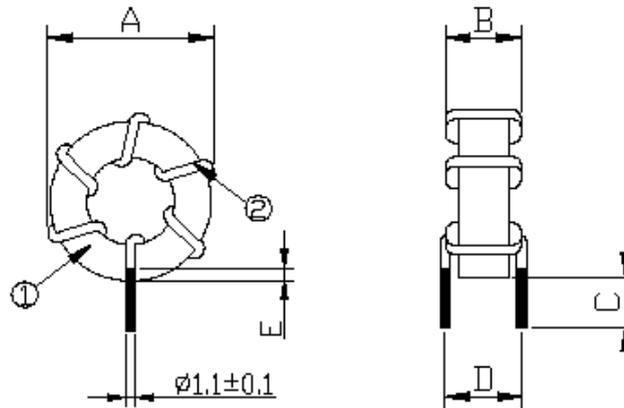

UNIT: mm
 A=14.0MAX.
 B=8.0MAX.
 C=3.5±0.5
 D=5.0±0.5
 E=0.5MIN

ORDERING INFORMATION

