



Magnet Specification

AS5000-MA4X2H-1


1. General Description

The AS5000-4X2H-1 is an axial magnet used with the AS5510 linear encoder, in order to measure small linear displacements.

The magnet is mounted on the top of the AS5510. The airgap depends on the desired resolution and displacement range for the end application.

Material: NdFeB sintered magnet, Ni-coated

2. Dimensional Specification (mm)

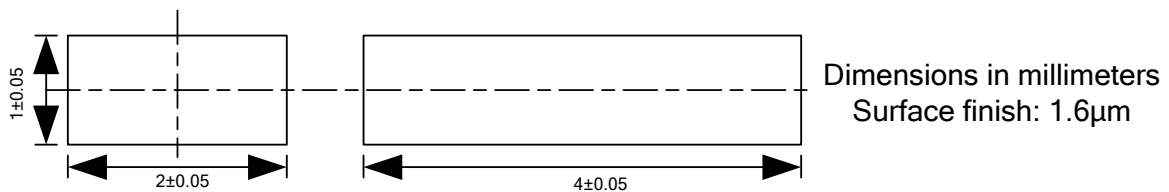

3. Magnetic Specification

Type	Min.	Nominal	Unit
Material	NdFeB sintered, Ni-coated		-
Property Grade	BMN-35H		-
Remanence Br	1.17	1.21	T
Coercive Force HcB	860	907	kA/m
Intrinsic Coercive Force HcJ	1353	-	kA/m
Max Energy Product (BH) max.	263	279	kJ/m ³
Working Temperature	-	120	°C
Density	7.5		g/cm ³

4. Magnetic Field Representation

Below in Figure 1, an illustration of the magnet and the AS5510 is shown. The curve plot below the sensor chip shows the ideal linear range of the magnet seen by the AS5510. Additionally, a magnet scan of this arrangement can be found in Figure 2 for further reference.

Figure 1:
Linear Position Sensor AS5510 + Magnet


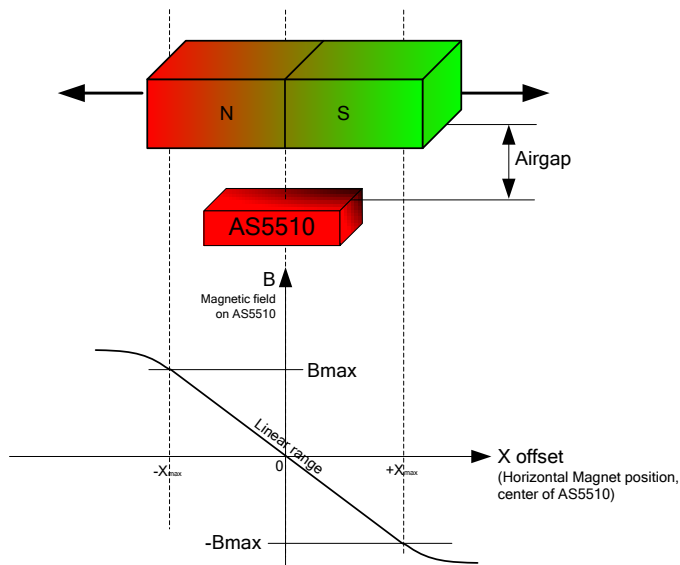


Figure 2:
Linear Position Sensor AS5510 + Magnet



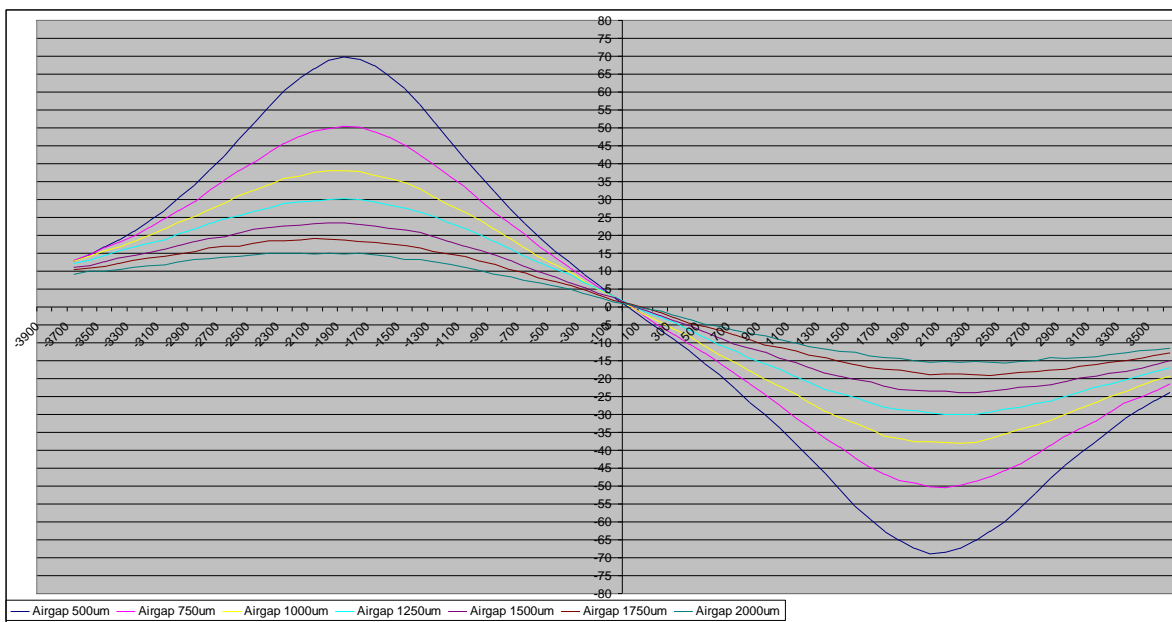

5. Magnet Supplier Information

The magnet supplier for this magnet is BOMATEC AG. Additional information is available online and the contact information is listed in the following.

BOMATEC AG

Hofstrasse 1

CH-8181 Höri, Switzerland

Phone: +41-44-872 10 00

Fax: +41-44-872 10 01

e-mail: contact@bomatec.ch

<http://www.bomatec.ch/>



Copyrights

Copyright © 2013, ams AG, Schloss Premstaetten, 8141 Unterpremstaetten, Austria-Europe.

Trademarks Registered ®. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

All products and companies mentioned are trademarks or registered trademarks of their respective companies.

Disclaimer

Devices sold by ams AG are covered by the warranty and patent indemnification provisions appearing in its Term of Sale. ams AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. ams AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with ams AG for current information. This product is intended for use in normal commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by ams AG for each application.

The information furnished here by ams AG is believed to be correct and accurate. However, ams AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of ams AG rendering of technical or other services.

Contact Information

Headquarters

ams AG

A-8141 Schloss Premstaetten, Austria

Tel: +43 3136 500 32110

Email: info@ams.com

For Sales Offices, Distributors and Representatives, please visit:

<http://www.ams.com/contact>