

RF AMPLIFIER

MODEL *TM6145*

Available as: TM6145, 4 Pin TO-8 (T4)
 TN6145, 4 Pin Surface Mount (SM3)
 FP6145, 4 Pin Flatpack (FP4)
 BX6145, Connectorized Housing (H1)

Features

- Low Noise Figure: 3.0 dB Typical
- Midband Output Power: +19 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1000 MHz	10 - 1000 MHz
Gain (dB)	10.7	10.0 Min.
Power @ 1 dB Comp. (dBm)	+19	+16.0 Min.
Reverse Isolation (dB)	-12	-11 Max.
VSWR In	1.5:1	2.0:1 Max.
Out	<2.5:1	3.0:1 Max.
Noise Figure (dB)	3.0	5.0 Max.
Power Vdc	+15	+15
mA	50	55 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +54 dBm (Typ.)
 Second Order Two Tone Intercept Point +46 dBm (Typ.)
 Third Order Two Tone Intercept Point +35 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 μsec Max.)

Typical Performance Data

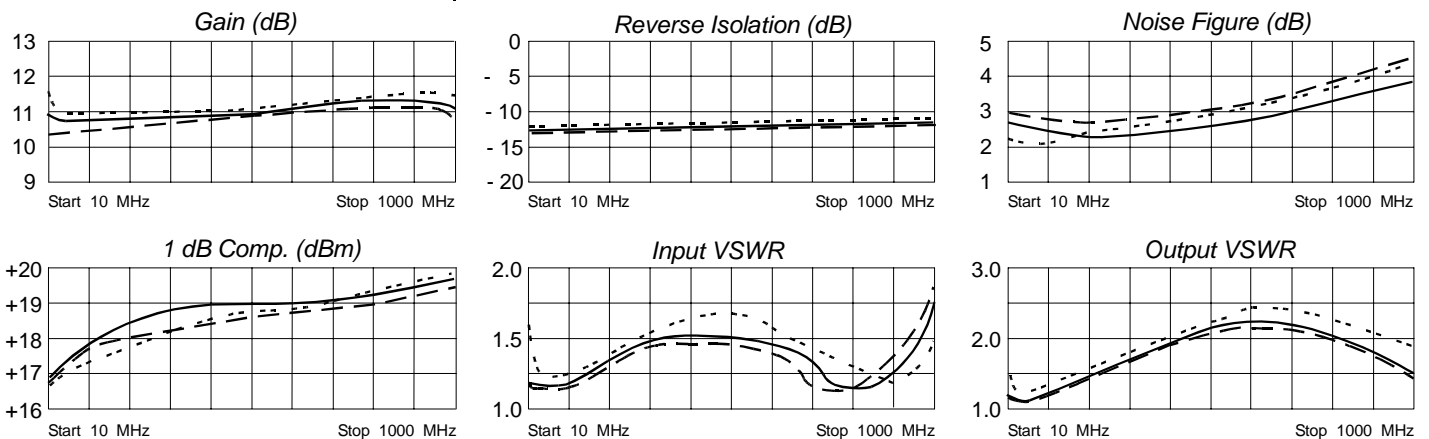

Legend ——— + 25 °C - - - + 85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.11	113	3.52	-165	.22	-169	.12	100
100	.10	81	3.52	169	.22	169	.13	77
200	.15	56	3.50	155	.22	155	.21	56
400	.21	20	3.50	128	.22	132	.35	25
600	.18	-16	3.57	102	.23	111	.42	-9
800	.07	-101	3.73	73	.25	89	.39	-49
1000	.27	121	3.73	38	.28	63	.27	-108



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 06/30/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001