



Features

Input voltage up to 150 VDC, surges up to 168 V

1 to 4 isolated outputs 3.3 to 96 VDC

Class I equipment



- RoHS lead-solder-exempt compliant¹
- Extremely slim case (4 TE), fully enclosed
- Extremely low inrush current, hot swappable
- Operating ambient temperature range -40 to 71 °C with convection cooling

¹ The solder exemption refers to all the restricted materials except lead in solder.

Model Selection

Output 1			Output 2			Output 3			Output 4			Type	Type
$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	Input voltage	Input voltage
[VDC]	[W]	[W]	[VDC]	[W]	[W]	[VDC]	[W]	[W]	[VDC]	[W]	[W]	16 - 36 VDC	33.6 - 75 VDC
3.3	100	132	-	-	-	-	-	-	-	-	-	BP 1101-7R	CP 1101-7R
5.1	122	183	-	-	-	-	-	-	-	-	-	BP 1001-7R	CP 1001-7R
3.3	50	66	5.1	61	91	-	-	-	-	-	-	BP 2101-7R	CP 2101-7R
5.1	61	91	5.1	61	91	-	-	-	-	-	-	BP 2001-7R	CP 2001-7R
12	60	96	12	60	96	-	-	-	-	-	-	BP 2320-7R	CP 2320-7R
15	60	97	15	60	97	-	-	-	-	-	-	BP 2540-7R	CP 2540-7R
24	60	96	24	60	96	-	-	-	-	-	-	BP 2660-7R	CP 2660-7R
5.1	61	91	12	30	48	12	30	48	-	-	-	BP 3020-7R	CP 3020-7R
5.1	61	91	15	30	48	15	30	48	-	-	-	BP 3040-7R	CP 3040-7R
5.1	61	91	24	30	48	24	30	48	-	-	-	BP 3060-7R	CP 3060-7R
5.1	20	30	12	30	48	12	30	48	3.3	10	20	BP 4720-7R	CP 4720-7R
12	30	48	12	30	48	12	30	48	12	30	48	BP 4320-7R	CP 4320-7R
15	30	48	15	30	48	15	30	48	15	30	48	BP 4540-7R	CP 4540-7R
24	30	48	24	30	48	24	30	48	24	30	48	BP 4660-7R	CP 4660-7R

Output 1			Output 2			Output 3			Output 4			Type	Type
$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	$V_{o \text{ nom}}$	$P_{o \text{ nom}}$	$P_{o \text{ max}}$	Input voltage	Input voltage
[VDC]	[W]	[W]	[VDC]	[W]	[W]	[VDC]	[W]	[W]	[VDC]	[W]	[W]	40 - 100.8 VDC	66 - 150 VDC
3.3	100	132	-	-	-	-	-	-	-	-	-	DP 1101-7R	EP 1101-7R
5.1	122	183	-	-	-	-	-	-	-	-	-	DP 1001-7R	EP 1001-7R
3.3	50	66	5.1	61	91	-	-	-	-	-	-	DP 2101-7R	EP 2101-7R
5.1	61	91	5.1	61	91	-	-	-	-	-	-	DP 2001-7R	EP 2001-7R
12	60	96	12	60	96	-	-	-	-	-	-	DP 2320-7R	EP 2320-7R
15	60	97	15	60	97	-	-	-	-	-	-	DP 2540-7R	EP 2540-7R
24	60	96	24	60	96	-	-	-	-	-	-	DP 2660-7R	EP 2660-7R
5.1	61	91	12	30	48	12	30	48	-	-	-	DP 3020-7R	EP 3020-7R
5.1	61	91	15	30	48	15	30	48	-	-	-	DP 3040-7R	EP 3040-7R
5.1	61	91	24	30	48	24	30	48	-	-	-	DP 3060-7R	EP 3060-7R
5.1	20	30	12	30	48	12	30	48	3.3	10	20	DP 4720-7R	EP 4720-7R
12	30	48	12	30	48	12	30	48	12	30	48	DP 4320-7R	EP 4320-7R
15	30	48	15	30	48	15	30	48	15	30	48	DP 4540-7R	EP 4540-7R
24	30	48	24	30	48	24	30	48	24	30	48	DP 4660-7R	EP 4660-7R

Output 1			Output 2			Output 3			Output 4			Type
$V_{o\ nom}$ [VDC]	$P_{o\ nom}$ [W]	$P_{o\ max}$ [W]	$V_{o\ nom}$ [VDC]	$P_{o\ nom}$ [W]	$P_{o\ max}$ [W]	$V_{o\ nom}$ [VDC]	$P_{o\ nom}$ [W]	$P_{o\ max}$ [W]	$V_{o\ nom}$ [VDC]	$P_{o\ nom}$ [W]	$P_{o\ max}$ [W]	Input voltage 21.6 - 50.4 VDC
3.3	100	132	-	-	-	-	-	-	-	-	-	GP 1101-7R
5.1	122	183	-	-	-	-	-	-	-	-	-	GP 1001-7R
3.3	50	66	5.1	61	91	-	-	-	-	-	-	GP 2101-7R
5.1	61	91	5.1	61	91	-	-	-	-	-	-	GP 2001-7R
12	60	96	12	60	96	-	-	-	-	-	-	GP 2320-7R
15	60	97	15	60	97	-	-	-	-	-	-	GP 2540-7R
24	60	96	24	60	96	-	-	-	-	-	-	GP 2660-7R
5.1	61	91	12	30	48	12	30	48	-	-	-	GP 3020-7R
5.1	61	91	15	30	48	15	30	48	-	-	-	GP 3040-7R
5.1	61	91	24	30	48	24	30	48	-	-	-	GP 3060-7R
5.1	20	30	12	30	48	12	30	48	3.3	10	20	GP 4720-7R
12	30	48	12	30	48	12	30	48	12	30	48	GP 4320-7R
15	30	48	15	30	48	15	30	48	15	30	48	GP 4540-7R
24	30	48	24	30	48	24	30	48	24	30	48	GP 4660-7R

Input

Input voltage	refer to selection chart
---------------	--------------------------

Output

Efficiency	$V_{i\ nom}, I_{o\ nom}$	up to 92%
Nominal output current $I_{o1,2,3,4\ nom}$	$P_{o1,2,3,4\ nom}/V_{o1,2,3,4\ nom}$	
Maximal output current $I_{o1,2,3,4\ max}$	$P_{o1,2,3,4\ max}/V_{o1,2,3,4}$	
Voltage setting accuracy 1, 2	$V_{i\ nom}, I_{o\ nom}$	up to $\pm 0.6\% V_{o1,2\ nom}$
Voltage setting accuracy 3, 4	$V_{i\ nom}, I_{o\ nom}$	$\pm 2\% V_{o3,4\ nom}$
Worst case output voltage 1, 2	$V_{i\ min}$ to $V_{i\ max}$, 0 to $I_{o1,2\ max}$, $T_C\ min$ to $T_C\ max$	$\pm 1.6\% V_{o\ nom}$
Minimum output current 1, 4	in parallel configuration not required	0 A
	in individual or series configuration	5% $I_{o1,4\ nom}$
Minimum output current 2, 3	in parallel configuration not required	0 A
	in individual or series configuration	5% $I_{o2,3\ nom}$
Cross load reg. output 4	$I_{o1,4\ min}$ to $I_{o1,4\ max}$	typ. $100\ m\Omega \cdot (I_{o1} - I_{o4})$
Cross load reg. output 3	$I_{o2,3\ min}$ to $I_{o2,3\ max}$	typ. $100\ m\Omega \cdot (I_{o2} - I_{o3})$
Output voltage switching noise	IEC/EN 61204, total, peak-peak	typ. $0.4\% V_{o\ nom}$
Common power limitation	$(P_{o1} + P_{o4})$ rectangular U/I characteristic	typ. $130\% P_{o\ max}/2$
	$(P_{o2} + P_{o3})$ rectangular U/I characteristic	typ. $130\% P_{o\ max}/2$

Protection

Input reverse polarity	built-in fuse	
Input undervoltage lockout		typ. $90\% V_{i\ min}$
Input overvoltage lockout		typ. $110\% V_{i\ max}$
Input transient protection	varistor	
Output	no-load, overload and short-circuit proof	
Output overvoltage	transient suppressor or 2 nd control loop	typ. $125\% V_{o\ nom}$
Overtemperature	switch-off with auto restart	T_C typ. $100^\circ C$

Control

Output voltage adjustment	output 1, 4 (with feature R)	60 - 110% $V_{o\ nom}$
Inhibit on primary side	TTL input, output disabled if left open-circuit	
Status indication	LEDs: In OK, Out OK	
Output good signal (Out OK)	isolated open-collector signal	

Safety

Approvals	EN 60950, UL 1950, CSA C22.2 No. 950	
Class of equipment		class I
Protection degree		IP 40
Electric strength test voltage	I/case, I/O, I/aux	2100 VDC
	O/case, aux/case	2100 VDC
	O/O, O/aux	500 V DC

EMC

Electrostatic discharge	IEC/EN 61000-4-2, level 4 (8/15 kV)	criterion B
Electromagnetic field	IEC/EN 61000-4-3, level 3 (10 V/m)	criterion A
Electr. fast transients/bursts	IEC/EN 61000-4-4, input/output, level 3/4 (2/4 kV)	criterion B
Surge	IEC/EN 61000-4-5, input, level 2/3 (1/2 kV)	criterion B
Conducted disturbances	IEC/EN 61000-4-6, level 2/3 (3/10 V)	criterion A
Electromagnetic emissions	CISPR 22/EN 55022, conducted	class B

Environmental


Operating ambient temp. (-7)	$V_{i\text{ nom}}, P_{o\text{ nom}}$, convection cooled	-25 to 71 °C
Operating case temp. (-7)	$V_{i\text{ nom}}, P_{o\text{ nom}}/P_{o\text{ max}}$	-25 to 95 °C
Storage temperature	non operational	-40 to 100 °C
Damp heat	IEC/EN 60068-2-3, 93%, 40 °C	56 days
Vibration, sinusoidal	IEC/EN 60068-2-6, 10 - 60/60 - 2000 Hz	0.35 mm/5 g_n
Shock	IEC/EN 60068-2-27, 11 ms	50 g_n
Bump	IEC/EN 60068-2-29, 11 ms	25 g_n
Random vibration	IEC/EN 60068-2-64, 20 - 500 Hz	4.9 $g_{n\text{ rms}}$

Options

Extended temperature range	-40 to 71 °C, ambient, operating	-9
Out OK output	excludes option i	D
Current sharing		T
Inhibit on output side	excludes option D	i
Synchronisation		W
Heat Sink	height 20 mm or 30 mm	B1 or B3



Mechanical data

The converters are designed to be inserted into a 19" rack according to IEC 60297-3.

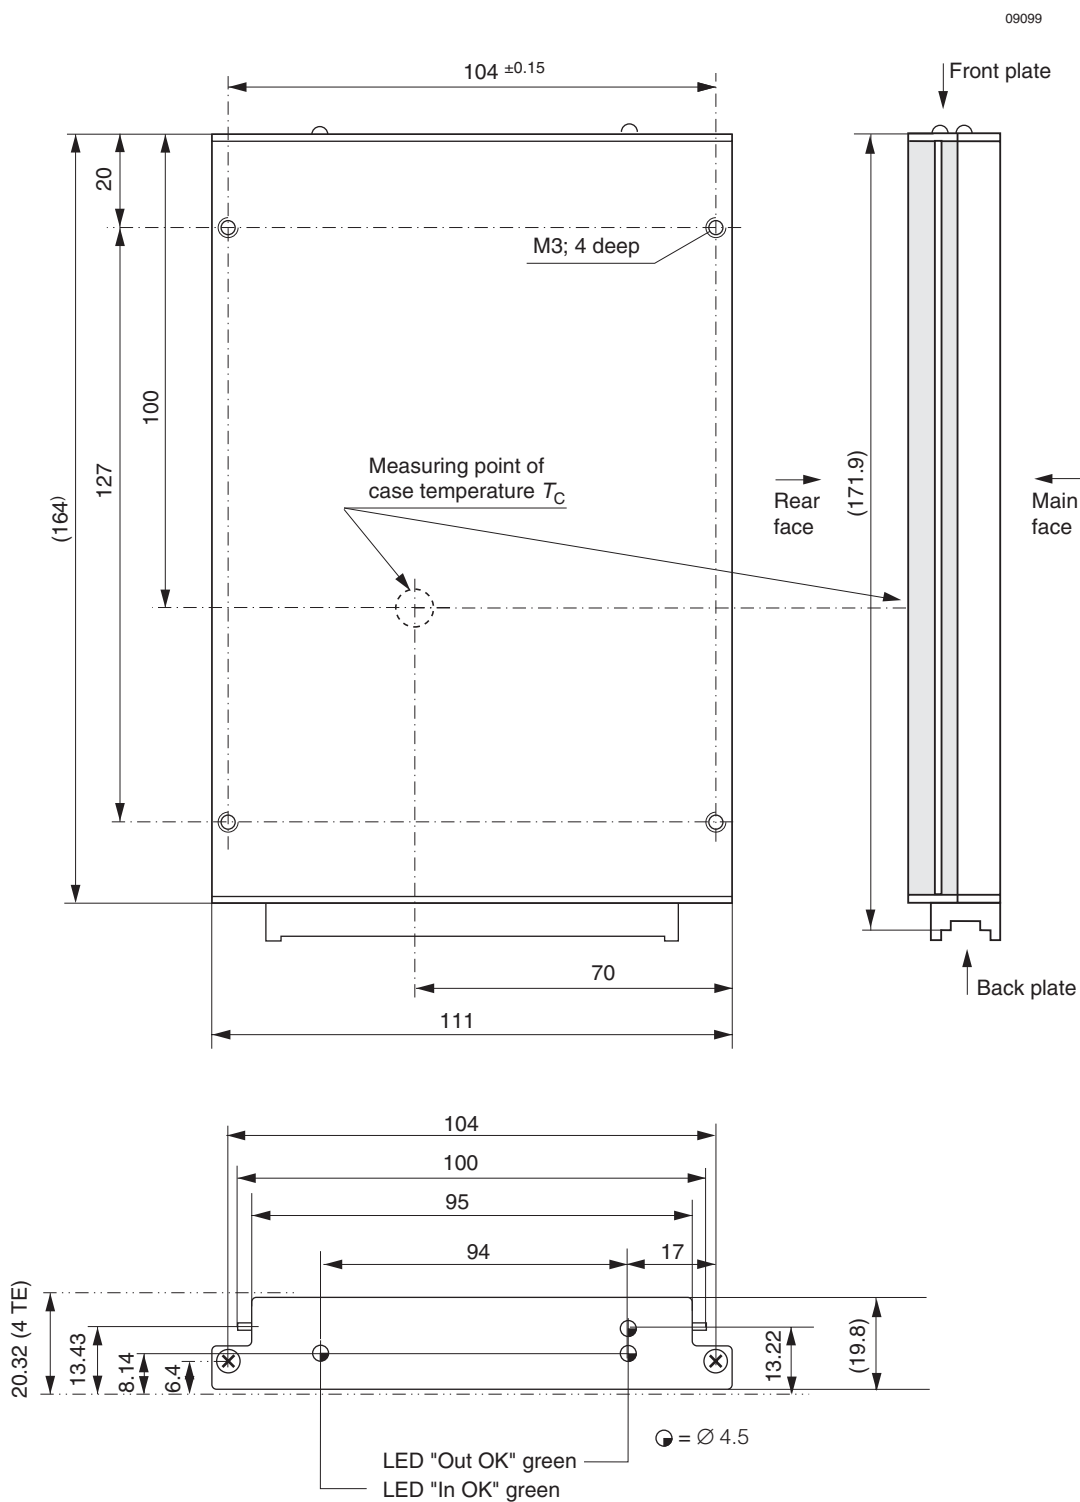

Pinout Information

Pin	P 1000		P 2000		P 3000		P 4000	
4	Vo1+	Output 1	Vo1+	Output 1	Vo1+	Output 1	Vo1+	Output 1
6			Vo2+	Output 2	Vo2+	Output 2	Vo2+	Output 2
8	Vo1-	Output 1	Vo1-	Output 1	Vo1-	Output 1	Vo1-	Output 1
10			Vo2-	Output 2	Vo2-	Output 2	Vo2-	Output 2
12	S+	Sense	S1+	Sense 1	S1+	Sense 1	Vo4+	Output 4
14	S-	Sense	S1-	Sense 1	S1-	Sense 1	Vo4-	Output 4
16	R	Control of V_o	R1	Control of V_{o1}	R1	Control of V_{o1}	R1/4	Control of $V_{o1/4}$
			T1	Current sharing	T1	Current sharing		
18	T	Current sharing	S2+	Sense 2	Vo3+	Output 3	Vo3+	Output 3
20	n.c.	Not connected	S2-	Sense 2	Vo3+	Output 3	Vo3+	Output 3
22	Out OK+	Output good	Out OK+	Output good	Out OK+	Output good	Out OK+	Output good
	i+	Inhibit second.	i+	Inhibit second.	i+	Inhibit second.	i+	Inhibit second.
24	Out OK-	Output good	Out OK-	Output good	Out OK-	Output good	Out OK-	Output good
	i-	Inhibit second.	i-	Inhibit second.	i-	Inhibit second.	i-	Inhibit second.
26	⊕	Prot. ground	⊕	Prot. ground	⊕	Prot. ground	⊕	Prot. ground
28	i	Inhibit	i	Inhibit	i	Inhibit	i	Inhibit
	W	Synchronizat.	W	Synchronizat.	W	Synchronizat.	W	Synchronizat.
30	Vi+	Input	Vi+	Input	Vi+	Input	Vi+	Input
32	Vi-	Input	Vi-	Input	Vi-	Input	Vi-	Input

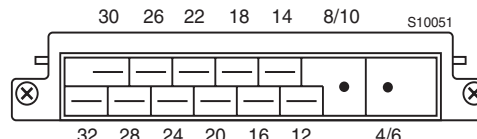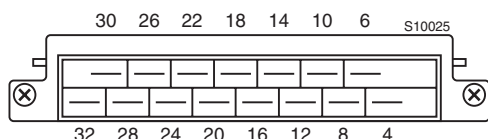

Accessories

Additional external heat sinks for operation above $P_{o\text{ nom}}$ or $T_{A\text{ max}}$ (option B1, B3)

Front panels for 19" rack mounting in 3U or 6U configuration (Schroff/Intermas)

Mating H15 connectors with screw, solder, fast-on or press-fit terminals

Mechanical mounting supports for chassis, DIN-rail and PCB mounting

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not designed, intended for use in, or authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional president of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.